

## ERGO Series Mixers

High-efficiency, high output ergonomic mixers for unmatched productivity and easy operation.



ERGO150

### MODELS

- ERGO100** 100 qt. Mixer       **ERGO150** 150 qt. Mixer

### STANDARD FEATURES

- Powerful motor with frequency converter  
– ERGO100: 5 HP – ERGO150: 7 HP
- IP53 standard, IP54 upgrade available
- Infinitely adjustable speed and four preset speeds
- Agitator speed range from 47 RPMs to 257 RPMs
- No bowl adapters required for down-sizing bowls
- Front-mounted controls with Piezo button technology, 90-minute digital timer, automatic bowl lowering and emergency stop and power bowl lift
- Remix™ function for 20 programs
- Optional watertight, permanently lubricated planetary head and attachment hub case
- Standard white powder coat for ERGO100 or stainless steel option (stainless steel standard for ERGO150)
- Removable bowl guard is dishwasher safe
- Interlock prevents operation if guard is opened or bowl is lowered
- Overload protection and no volt release
- Non-skid rubber feet
- 6 foot cord
- ETL and NSF listed
- Made in Denmark

### STANDARD ACCESSORIES

- Stainless steel bowl
- Aluminum flat beater
- Stainless steel wire whip
- Stainless steel dough hook

### WARRANTY

- Two-year parts and labor limited warranty

### OPTIONAL ACCESSORIES/ATTACHMENTS

- 40 qt. & 60 qt. bowl and attachments (ERGO100)
- Bowl scraper - 40 - qt., 100 -150 qt. options
- Bowl truck
- Reinforced whip
- Stainless steel wing whip


**To select options see back**



ETL listed  
Conforms to UL Std 763  
Certified to CSA Std C22.2 No. 195

Approved by: \_\_\_\_\_

Date: \_\_\_\_\_

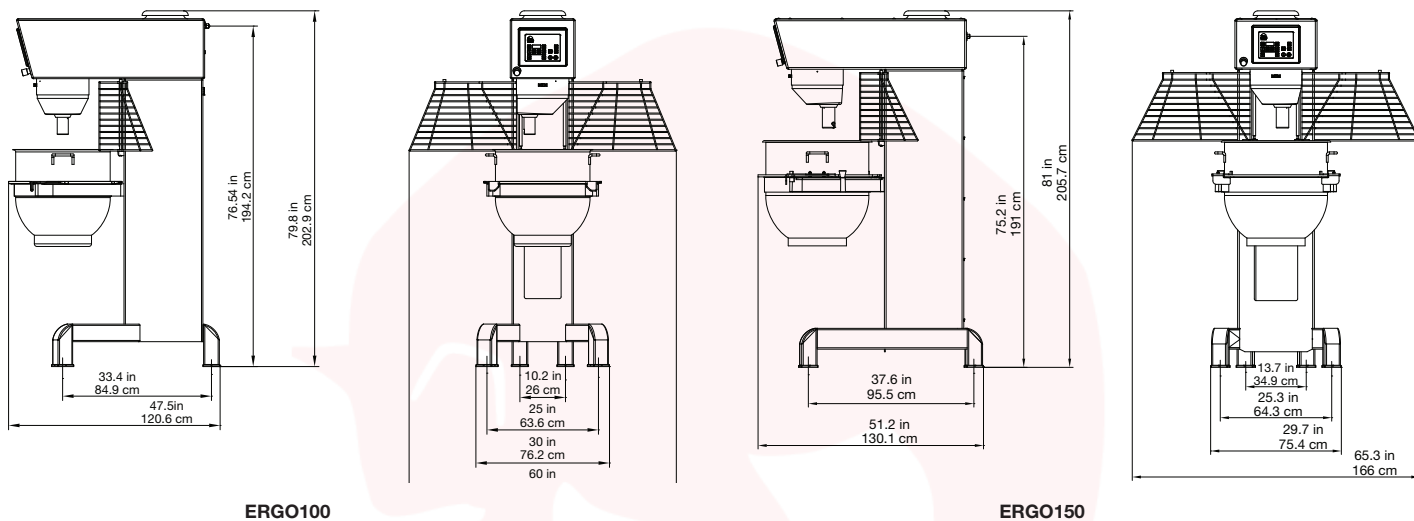

**SPECIFICATIONS**

| Model   | Motor | Volts    | Amp  | Plug Type | Mixing Speeds | Hub Speeds | IP Rating |
|---------|-------|----------|------|-----------|---------------|------------|-----------|
| ERGO100 | 5 HP  | 208/60/3 | 16.5 | --        | 47 - 257 RPMs | N/A        | IP53      |
| ERGO150 | 7 HP  | 480/60/3 | 13.5 | --        | 47 - 257 RPMs | N/A        | IP53      |

Delivered without plug. Specify voltage when ordering.

**DIMENSIONS | SHIPPING INFORMATION**

Reinforced carton for shipping. This product ships on a pallet. See dimensions below.

| Model   | Overall Dimensions  | Net Wt.                   | Shipping Dimensions  | Ship Wt.                  | Freight Class    |
|---------|---|---------------------------|--|---------------------------|------------------|
| ERGO100 | 30" W x 47.5" D x 79.9" H<br>(76.2 cm x 120.65 cm x 202.9 cm) | 943.6 lbs.<br>(428 kg)    | 33.46" W x 52" D x 88.58" H<br>(85 cm x 132 cm x 225 cm)   | 1,205.2 lbs.<br>(545 kg)  | 85<br>89 CU ft.  |
| ERGO150 | 29.7" W x 51.2" D x 81" H<br>(75.44 cm x 130 cm x 205.74 cm)  | 1,124 lbs.<br>(520.27 kg) | 38.58" W x 56.7" D x 92.52" H<br>(98 cm x 144 cm x 235 cm) | 1,272 lbs.<br>(633.67 kg) | 85<br>117 CU ft. |

**OPTIONAL/ADDITIONAL ACCESSORIES**

- VTRUCK-150 Bowl truck
- VBEAT60-100 60 qt. beater
- VWINGWHIP150 150 qt. wire wing whip
- VSCRIP60-100 60 qt. scraper
- VHDWHIP-150 150 qt. reinforced whip
- VBOWL40-100 40 qt. bowl
- VSCRIP-150 150 qt. scraper
- VHOOK40-100 40 qt. hook
- VSCRIP-40 40 qt. scraper
- VWHIP40-100 40 qt. wire whip
- VBOWL60-100 60 qt. bowl
- VBEAT40-100 40 qt. beater
- VHOOK60-100 60 qt. hook
- VSCRIP-40 40 qt. scraper
- VWHIP60-100 60 qt. wire whip

| Product              | Attachment    | ERGO100  | ERGO150  |
|----------------------|---------------|----------|----------|
| Bread Dough (65% AR) | Hook          | 155 lbs. | 190 lbs. |
| Pizza Dough (50% AR) | Hook          | 135 lbs. | 175 lbs. |
| Mashed Potatoes      | Whip / Beater | 76 lbs.  | 110 lbs. |
| Whipped Cream        | Whip          | 20 qts.  | 32 qts.  |
| Pancake Batter       | Whip / Beater | 44 qts.  | 50 qts.  |
| Cookie Dough         | Beater / Hook | 105 lbs. | 160 lbs. |

Ergonomic heavy-duty mixer in white powder coat (ERGO100) or stainless steel (ERGO150). Front-mounted Piezo button controls and digital timer. Remix™ function for 20 programs. Agitator speed range from 47 to 257 RPMs. Water cover at air ventilation and slotted screws. Watertight, permanently lubricated planetary head and attachment hub case. 6 ft. cord. Mixer is IP53 rated, ETL and NSF certified. Two-year parts and labor limited warranty.