




# BB700, BB1100, BB1300, BB1600 & BB1300XX EQUAHEAT BANQUET CARTERS For Preplated Banquet Meals Canned or Electric Heat

CARTER-HOFFMANN  
**B11**  
BANQUET CARTS  
FOOD SERVICE EQUIPMENT

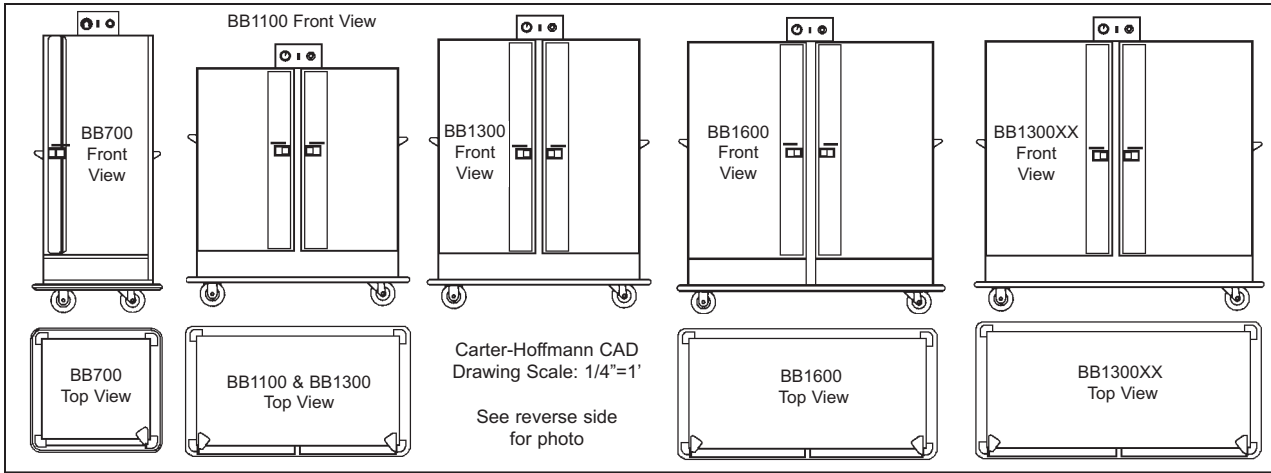

Model Number	Plate Capacity*		Number of Shelves	Clearance Between Shelves		Shelf Size		Overall Dimensions						Caster Diameter		Shipping Weight	
	8.75-11" diameter	11.25-12-75" diameter		in	mm	in	mm	Height		Depth		Width		in	mm	lbs	kgs
<input type="checkbox"/> BB700	60	-	3	16 <sup>1</sup> / <sub>2</sub>	419	24 <sup>3</sup> / <sub>8</sub> x21 <sup>7</sup> / <sub>16</sub>	619 x 544	74 <sup>3</sup> / <sub>4</sub>	1899	32	813	33	838	6	152	378	171
<input type="checkbox"/> BB1100	96	-	3	13	337	47x22 <sup>1</sup> / <sub>8</sub>	1194x546	65	1651	32	813	55 <sup>5</sup> / <sub>8</sub>	1413	6	152	498	226
<input type="checkbox"/> BB1300	120	-	3	16 <sup>1</sup> / <sub>2</sub>	419	47x22 <sup>1</sup> / <sub>8</sub>	1194x546	74 <sup>3</sup> / <sub>4</sub>	1899	32	813	55 <sup>5</sup> / <sub>8</sub>	1413	6	152	507	230
<input type="checkbox"/> BB1600	150	-	3	16 <sup>1</sup> / <sub>2</sub>	419	58x22 <sup>1</sup> / <sub>8</sub>	1486x546	74 <sup>3</sup> / <sub>4</sub>	1899	32	813	67 <sup>1</sup> / <sub>8</sub>	1705	6	152	658	298
<input type="checkbox"/> BB1300XX	-	120	3	16 <sup>1</sup> / <sub>2</sub>	419	63x25 <sup>5</sup> / <sub>8</sub>	1619x651	74 <sup>3</sup> / <sub>4</sub>	1899	38	965	74	1880	6	152	678	307

\* Capacity based on common plate depth and combined plate/cover height of 2.5". Due to the variety of plate thicknesses and depths, as well as plate cover heights, actual capacity may vary.

**CONSTRUCTION...** Completely welded double wall cabinet construction with outer cabinet formed and welded to base. All seams turned in to eliminate raw edges.

**CABINET MATERIAL...** All stainless steel construction; 20 gauge polished exterior and 24 gauge interior.

**BASE FRAME...** 12 gauge stainless steel full depth bolsters with 1"x1" 16 gauge tubular stainless steel perimeter supports welded to bolsters.

**CASTERS...** 6" diameter, industrial grade casters with polyurethane tread. Sealed roller axle bearing and double ball bearing swivel. Zerk grease fittings. Plate mounted and bolted to base in offset "wheel ahead" pattern. Two casters fitted with brakes.

**BUMPER...** Non-marking gray vinyl bumper set in heavy duty 3/16" extruded aluminum frame with reinforced corner "cut-outs."

**INSULATION...** 1" thick high density continuous wrap-around type fiberglass insulation with 1 1/2" thickness on top.

**DOOR...** Welded double stainless steel door. 20 gauge polished exterior and 20 gauge interior. Filled with 1" thick high-density fiberglass insulation.

**HINGES...** Concealed, stainless steel hinge with 5/16" pin.

**GASKET...** High temperature silicone gasket mounted to cabinet.

**LATCHES...** Flush mounted, heavy-duty sliding latch with exclusive grip handle.

**PUSH HANDLES...** Two horizontal full width 1" diameter stainless steel tubular push handles with back-up plates. Mounted to each end of the cabinet.

**SHELVES...** Welded, duplex nickel-plated removable wire shelves.

**THERMOMETER...** Dial type with remote sensing bulb and sensing bulb protector.

**CANNED FUEL DRAWERS...** Drawers can be accessed without opening cabinet. Each is fitted with a safety latch to keep drawer securely closed during transport. Deflector shields above drawers direct heat into baffle on back wall of cabinet to distribute heat throughout cabinet.

**HEATING SYSTEM...** Top mounted heater. Stainless steel construction. Removable without tools. 1500 watt inconel-sheathed heating element. High impedance protected, internally cooled fan motor. Full range thermostat and power indicating light.

**ELECTRICAL CHARACTERISTICS...** Operates on 120 volts, 60 cycle, single phase, 1500 watts, 13 amps. Ten foot rubber cord with 3 prong grounding plug. NEMA 5-15P plug.

**PERFORMANCE...** Capable of heating to 200°F (94°C). Preheat to 160°F (71°C) in approximately 20 minutes.

- ACCESSORIES/OPTIONS...**
- 4 wheel brakes
  - Alternate electrical configurations
  - Menu card holder
  - Top mounted transport latch
  - Locking paddle latch
  - Lexan thermometer cover
  - Alternate caster sizes & types
  - Cord wrap
  - Locking door latch with key
  - Heavy-duty "Las Vegas" package
  - Reinforced cord strain relief
  - Tow hitch (except BB700)
  - Marine package
  - Donut-style door bumpers
  - Close-fit bumper
  - Corner bumpers in lieu of wrap-around bumper
  - Pull-up handle(s)

# SPECIFICATIONS



**CARTER-HOFFMANN**  
1551 McCormick Ave., Mundelein, IL 60060  
(847) 362-5500 • (800) 323-9793 • Fax (847) 367-8981  
[www.carter-hoffmann.com](http://www.carter-hoffmann.com)



Printed in U.S.A. B10 0314  
Carter-Hoffmann is a trademark of Carter-Hoffmann LLC.

# FEATURES & BENEFITS

## BB700, BB1100, BB1300, BB1600 & BB1300XX EQUAHEAT BANQUET CARTERS

*Since 1947, Foodservice Equipment That Delivers!*

### DOUBLE WALL STAINLESS STEEL CABINET...

Strongest, most durable materials for long life. High density 1" thick fiberglass in walls and door, 1 1/2" thick on top for maximum heat retention.

### COMPLETELY WELDED TURNED-IN SEAM CONSTRUCTION...

Adds rigidity to entire cabinet and eliminates raw edges for ease of cleaning and safety.

### WRAP-AROUND BUMPER...

Full perimeter aluminum bumper with non-marking gray vinyl insert. Protects cart and facility walls from damage.



**BB1300**

(shown with optional top-mount transport latch)

### HIGH PERFORMANCE REMOVABLE HEATER...

Blower system for fast heat up, recovery and even heat distribution throughout cabinet. Removable without tools for easy service and cabinet cleaning.

### REMOVABLE WIRE SHELVES...

Welded, duplex nickel-plated with reinforced shelf clips. Sturdy for heavy plate loads and removable for cleaning.

### HEAVY-DUTY STAINLESS STEEL BASE FRAME...

12 gauge caster bolsters with perimeter frame for rugged use and added durability.

### 6" DIAMETER INDUSTRIAL GRADE CASTERS

WITH POLYURETHANE TREAD... Long lasting and easy rolling for maximum load and minimum maintenance. Two swivel and two rigid. Swivel casters fitted with brakes. Mounted to base in offset wheel-ahead pattern for easy rolling over uneven surfaces.

### CANNED FUEL DRAWERS...

Allow access to canned fuel without opening cabinet door. Safety latches keep drawers securely closed during transport. Canned fuel is set back from the drawer handle to reduce burn hazard. Deflector shields above drawers force heat to precision-engineered baffle to evenly distribute heat throughout cabinet.



### CONCEALED STAINLESS STEEL HINGE WITH 5/16"

PIN... Keeps door properly aligned and withstands rugged use.



### NON-MARKING BUMPER SET IN HEAVY-DUTY 3/16" EXTRUDED ALUMINUM FRAME...

Floating style, bolted to the base. Protects doorways, walls and cart from damage.



### WHEEL-AHEAD CASTER CONFIGURATION...

Mounted to base in offset wheel-ahead pattern for easy rolling over uneven surfaces. Allow for easy handling and steering.



### FLUSH MOUNTED SLIDING DOOR LATCH...

Exclusively designed for transport applications. Door remains closed during transport. Flush design protects cart from damage.

1551 McCormick Avenue, Mundelein, Illinois 60060  
Tel. (847)362-5500 • (800)323-9793 • Fax (847)367-8981  
[www.carter-hoffmann.com](http://www.carter-hoffmann.com)



NSF/ANSI 4

Specifications subject to change through product improvement & innovation.