



Job:                      Item No.:  
Notes:  
Model Number:  PH1800    PH1825

## Heated Transport Carts

## SPECIFICATIONS



PH1825

### DESCRIPTION

PH Series Heated Food Transport Cabinets are designed to hold and transport cooked food warm and ready for serving. They are constructed of sanitary stainless steel and feature a bottom-mounted lift-out heating system with dial controls and blower heat for even air flow throughout the cabinet. Transport features include wrap-around bumper, wheel-ahead caster pattern and insulated turned-in seam construction.

### SHORT FORM SPECIFICATIONS

Heated food transport cart, electric, insulated, welded, turned-in seam stainless steel construction with side-mounted push handles and flush-mounted transport latch with finger grip. Lift-out, convection heater. Stainless steel tray racks at 1.5" spacing for 18"x26" sheet pans. Non-marking gray vinyl wrap-around bumper. 5" or 6" polyurethane casters set in wheel-ahead caster pattern. 120V, 60Hz, 1Ph, 1650 watts, 13.7A, ten-foot 3 prong 3 wire rubber cord with 3-prong grounding plug. NEMA 5-15P.

### FEATURES

- Bottom mounted, 1650 watt, removable heating system
- Dial thermometer with remote sensing bulb
- Capable of heating to 200°F (93°C); pre-heat to 160°F (71°C) in approximately 25 minutes
- All welded, turned-in seam, stainless steel construction
- Two heavy-duty aluminum vertical push handles bolted to sides with reinforced back-up plates
- Double panel door with vinyl gasket; filled with 1" thick high-density fiberglass insulation
- Concealed, stainless steel pin hinge; 270° door swing
- Flush mounted sliding latch with finger grip
- High temperature magnetic door gasket mounted to door
- All-swivel polyurethane casters; two fitted with brakes
- Offset wheel-ahead caster pattern
- Non-marking gray vinyl bumper set in heavy-duty extruded aluminum frame
- Removable tray racks with channel slides at 1.5" spacing
- Accommodates 18"x26" sheet pans

### OPTIONS AND ACCESSORIES

- Menu card holder
- Polycarbonate thermometer cover
- Top-mounted transport latch with padlock hasp
- Locking paddle-style door latch
- Rack hold down device
- Heater hold down device
- Stainless steel push handles
- Alternate caster sizes and types
- Removable canned fuel holder
- Close-fit bumper

### CERTIFICATIONS



### WARRANTY

One-year warranty for parts and labor.



**CARTER-HOFFMANN**  
1551 McCormick Avenue, Mundelein, IL 60060  
847.362.5500 • 800.323.9793  
www.carter-hoffmann.com

Follow us



Form PH1800\_0623






Job:                   Item No.:  
 Notes:  
 Model Number:  PH1800    PH1825

## Heated Transport Carts

## SPECIFICATIONS

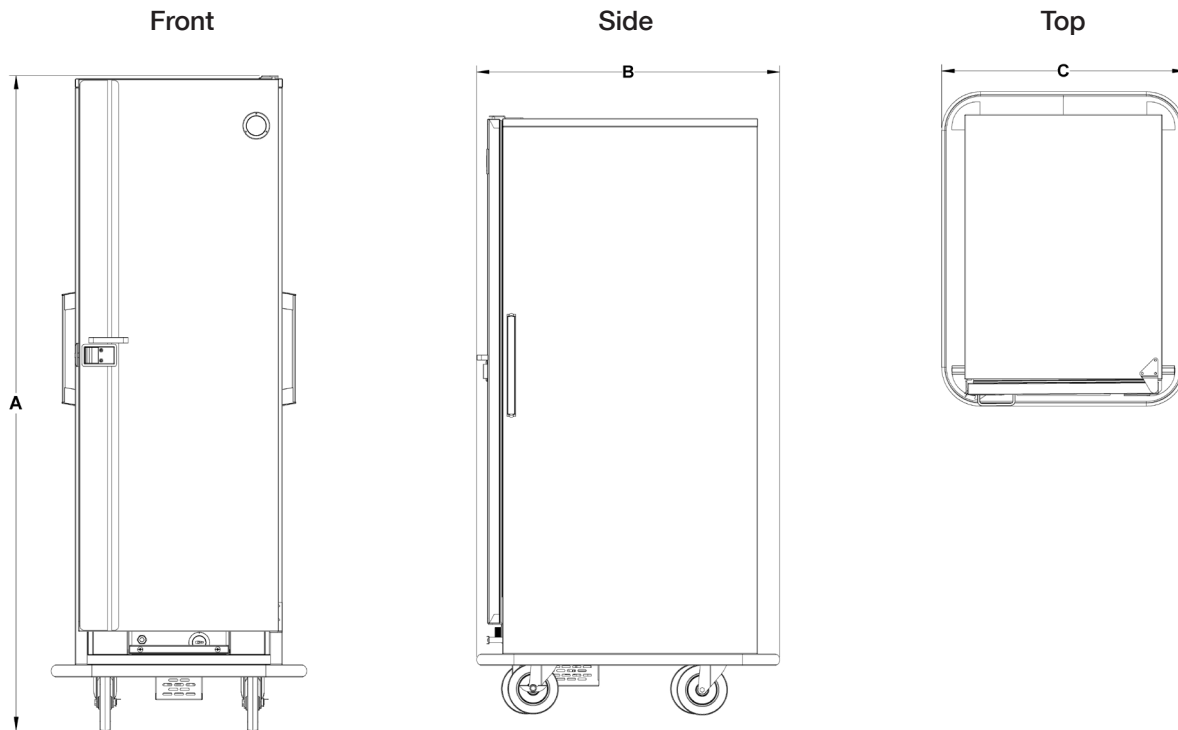


### CLEARANCES

A clearance of at least 2" from any wall or combustible material. A clearance of least 36" at the front of the cabinet is required to open the door. Cabinet must be placed on a solid level floor.

### ELECTRICAL DATA

Single electrical connection.  
 120 Volts, 1650 Watts, 13.7 Amps, 60Hz, single phase.  
 Ten foot three wire rubber cord with 3-prong grounding plug. NEMA 5-15P.



Model Number	Pan Capacity*	Inside Working Height		Height [A]		Depth [B]		Width [C]		Caster Diameter		Shipping weight	
		18"x26"	in	mm	in	mm	in	mm	in	mm	in	mm	lbs
PH1800	29	46	1168	58	1473	36	914	27 <sup>7/8</sup>	708	5	127	260	118
PH1825	36	57 <sup>1/4</sup>	1454	71	1803	36	914	27 <sup>7/8</sup>	708	6	152	328	149

\*Pan spacing at 1.5" (38mm)

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Carter-Hoffmann exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using these specifications. By using the information provided, the user assumes all risks in connection with such use.