



CIRCLE AIR PROOFER BASE



CA6X Series Proofer, Individual Heat and Humidity Control, Mechanical Controls, Stainless Steel Construction, Automatic Water Feed, Full View Glass Doors, One Year Labor & Two Year Parts Warranty



PROJECT _____

ITEM NO. _____

NOTES _____

MODEL NUMBER: **CA6PX**



SHOWN WITH OPTIONAL CA6X/CA6XG

FEATURES

- Mechanical Thermostat Controls for Heat & Humidity
 - Maximum Temperature: 110° F (43° C)
 - Minimum Temperature 90° F (32° C)
- 60 Minute Count Down Timer
- Relative Humidity up to 95%
- Automatic Water Feed
- No Drain Required, Drain Catch Pan Included

CONSTRUCTION

- Stainless Steel Construction
- Heavy Duty Casters for Mobility (2 locking)
- Independent Doors
- Full View Glass Doors

ACCESSORIES/OPTIONS


- Water Filter (PLF240)
- Oven 9CA6X & CA6XG)

CLEARNACE

- 5" (127mm) Around Sides & Back

WARRANTY

- One Year Labor & Two Year Parts

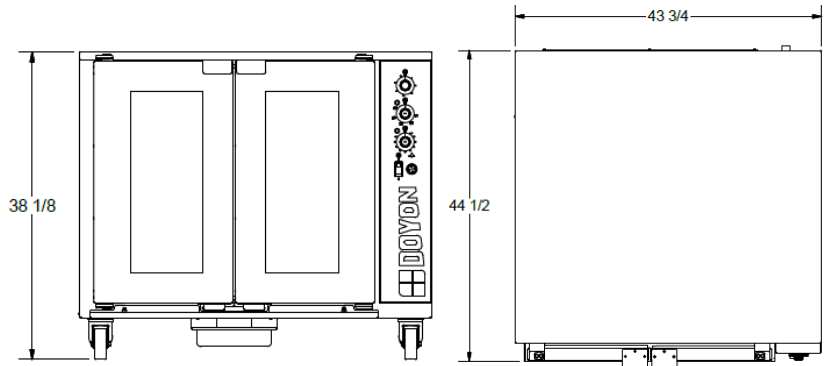

Model	Weight	Overall Dimensions			Water Connection	Shelf Spacing	Pan Capacity (18"x26")
		W	D	H			
CAPX	400 (181)	43 3/4" (1111)	44 1.2" (1130)	38 1/8" (968)	1/4" NPT	4" (101mm)	12

Model	Gas System			Electrical System *ground wire not included					
	BTU	D.H.	G.I.	Volts	Phases	Amps	kW	Hz	NEMA
CAPX	-	-	-	120 208-240	1 1	10 7/6	-	50/60 50/60	-

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

KCL & REVIT DRAWINGS UPON REQUEST

REVISION B | 4/19/2021

PRINTED IN THE U.S.A.

Follow Us



Doyon

5600 13th Street, Menominee, MI 49858

906.863.4401 | 800.338.9886 | www.doyon.qc.ca

