



## PCVE-1

Shown with optional casters

#### **MODEL NUMBERS**

PCVE-1 PCVDE-1

## **TURBO-FLOW SYSTEM**

- This system assures even cooking throughout the entire oven.
- Standard and Bakery depth oven sizes available.
- Cooked or baked products have less shrinkage, more moisture and taste better.
- Creates an air flow pattern that simultaneously heats the inner and outer surfaces of the oven cavity.
- Recirculates hot air to maximize efficiency for energy savings.
- Fast temperature recovery.
- 2-speed 1/2 hp fan motor for high production cooking and delicate baking.
- 2-speed oven cool down feature.
- Standard and Bakery depth ovens are rated 11 KW.
- Porcelainized oven interior for easy cleaning and provides better browning.
- 2 interior oven lights are controlled by a momentary switch outside the oven.
- 10 rack positions for maximum versatility.
- 5 oven racks included.
- One hand opens and closes both doors simultaneously
- 50/50 doors swing open to 130°

# PROGRAMMABLE CONTROLS WITH COOK 'N HOLD FEATURE:

- Easy to program. Simply select the time, temperature, fan settings and hold mode - then preset buttons.
- Cook 'N Hold feature. Cooks at a higher temperature for browning.
  Automatically switches to a lower holding temperature.
- 24 hr. digital countdown timer with easy-to-read LED digital display.
- Cooking versatility.
- Fan option lets you choose modes:
  - 1. Fan on continuously
- 2. Fan on when heat is on pulsed fan feature
- Displays °F or °C readings.

#### MANUAL CONTROLS

- Independent time and temperature controls give you maximum versatility for general baking and roasting.
- 2-speed fan switch controls bake or roast

#### THERMOSTATIC OVEN CONTROL


• Electronic temperature control: 150°F to 500°F (66° C to 260° C).


#### **ON - OFF SWITCH**

- 60 minute manual timer
- Audible buzzer lets you know when the cooking cycle is complete.





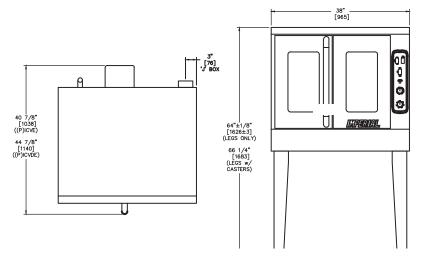



#### **ELECTRICAL CONVECTION OVENS**

MODEL	DESCRIPTION	DIMENSIONS	ELECTRICAL OUTPUT BTU	SHIP WEIGHT LBS
PCVE-1	SINGLE DECK, STANDARD DEPTH	38" W X 40-7/8" D X 64" H (965 X 1038 X 1526 MM)	10 KW	(236) 521
PCVDE-1	SINGLE DECK, BAKERY DEPTH	38" W X 44-7/8" D X 64" H (965 X 1140 X 1526 MM)	10 KW	(277) 611

## ELECTRICAL REQUIREMENTS

MODEL	TOTAL KW	VOLTS	PHASE	HERTZ	AMPS			
	11	208	1	50/60	48 PER OVEN			
	11	208	3	50/60	28 PER OVEN			
PCVE-1, PCVDE-1	11	240	1	50/60	42 PER OVEN			
	11	240	3	50/60	24 PER OVEN			
	11	*480	3	50/60	12 PER OVEN			

<sup>\*</sup>For export only





#### **OPTIONS AND ACCESSORIES**

- Cook and Hold computer controls
- Stainless steel back enclosure
- Direct connect vent
- Heavy duty casters, set of 4
- Stack kit with 6" (152) stainless steel legs
- Stainless steel solid doors
- Stainless steel bottom shelf and adjustable rack
- supports
- Stainless steel bottom shelf only for stand
- Extra oven racks
- 480 Volt

### **CLEARANCE REQUIREMENTS**

For use only on non-combustible floors with legs or casters; or 2 1/4" (57 mm) overhang is required when curb mounted. Provide 0" clearance from non-combustible side and rear walls. Provide 6" (152mm) minimum clearance from combustible side walls and 0" from combustible wall at rear.

Two speed motor - 1/2 HP, 1725/1140 RPM

#### **EXTERIOR**

- Stainless steel exterior, except back. Reflects a quality, professional look for exhibition cooking.
- Welded and finished seams
- Stainless steel legs
- Easy to clean and maintain
- One year parts and labor warranty

