


Model Numbers
ISPA-18-E



Dual controls, inner and outer coils are controlled independently.



Infinite heat controls for maximum cooking flexibility.



Stainless steel open cabinet base.




ISPA-18-E shown with optional casters

COILED ELEMENT - High temperature coiled element.

- Dual controls, inner and outer coils are controlled independently.
- Infinite heat controls for maximum cooking flexibility.
- Element is 13" (330 mm) diameter for maximum pan contact.
- Self-cleaning convenience.

EXTERIOR FEATURES - Stainless steel front and sides with welded and finished seams.

- Stainless steel cabinet base for storage.
- Knobs are cast aluminum with Vylox heat protection grip.
- Heavy duty legs with adjustable feet.
- One year parts and labor warranty.

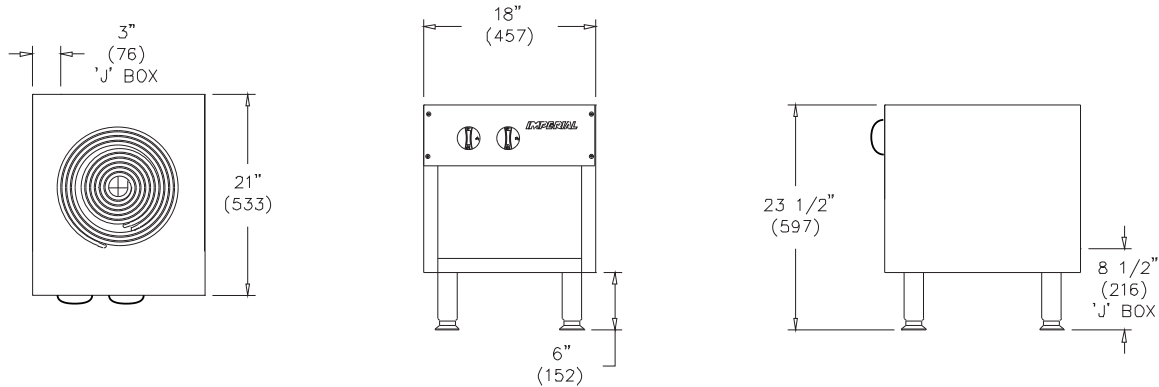

ELECTRIC STOCK POT RANGE

| MODEL | ELEMENT DESCRIPTION | TOP SIZE | | SHIP WEIGHT | |
|-----------|-----------------------------|-----------|----------------|-------------|-----|
| | | IN | (MM) | (KG) | LBS |
| ISPA-18-E | (1) High Temperature Coiled | 18" x 22" | (457 x 559 mm) | (36) | 79 |

Measurements in () are metric equivalents.

| ELECTRICAL REQUIREMENT | | | | |
|------------------------|-------|-------|-------|------|
| KW | VOLTS | PHASE | HERTZ | AMPS |
| 6 KW | 208 | 3 | 60 hz | 24 |
| 8 KW | 240 | 3 | 60 hz | 27 |

| MODEL | DIMENSIONS | CRATED DIMENSIONS |
|-----------|------------------------------------------------|----------------------------------------------------|
| ISPA-18-E | 18" w x 21" d x 23-1/2" h (457 x 533 x 597 mm) | 20-1/2" w x 23-1/2" d x 22" h (521 x 597 x 559 mm) |

OPTIONS AND ACCESSORIES

- 18" (457 mm) height available (specify 18" H when ordering)
- Side-by-Side range orientation in lieu of front-to-back (available at an additional charge)
- 6" (152 mm) casters, set of 4, 2 with brakes

CLEARANCE REQUIREMENTS

For use only on non-combustible floors with legs or casters. 0" clearance from non-combustible side and rear walls. Provide 6" (152 mm) minimum clearance from combustible side walls and 0" from combustible wall at rear.

