



APPLICATION

The Model FM-RMB/SMB 600 Series is a high production floor charbroiler. Many options and accessories are available to tailor your charbroiler to match your menu selection and operational needs in the kitchen. This series is also available in a High Gas Output model for higher temperatures for heavy production restaurants.

STANDARD FEATURES & ACCESSORIES

- FM-RMB-600 V-shaped radiant for each burner
- FM-SMB-600 Ceramic coal screen
- Free floating top grid 1/2" (1.3 cm) steel rods allows expansion and contraction without warping
- E-Z Tilt top grid drains grease into front trough
- Round top grid with standard spacing with quick lift handle
- Fully Insulated double walled outer cabinet
- Stainless steel on all four sides
- Water Tubs
- 6" (15.2 cm) stainless service shelf with towel bar
- Runner tube pilot system
- Individual front burner controls for precise regulation
- All stainless steel burners for long life
- Single 1/2" gas connection
- Top Grid Scraper

APPROVALS



Model FM-RMB/SMB 600 Series Floor Gas Charbroiler

(H) High Output

• 624-H 80Kbtu/hr

• 636-H 140Kbtu/hr

648-H 200Kbtu/hr660-H 260Kbtu/hr

• 672-H 320Kbtu/hr

MODELS

FM-RMB-6xx-x (Radiant Model) and FM-SMB-6xx-x (Ceramic Coal Model) Model Size Width and Gas Btu Output Rate

Standard Output **

- 624 60Kbtu/hr
- 636 105Kbtu/hr
- 648 150Kbtu/hr
- 660 195Kbtu/hr
- 672 240Kbtu/hr

OPTIONS

- High output models available
- Grid Options:
 - Round rod top fish grates
 - MagiKrome standard
 - MagiKrome fish
 - Scround standard
 - Scround fish
- Cast iron
 - Cast iron fish
 - Diamond (waffle)
- Pan Cutouts in Service Shelf (available on 10" or 12" shelves only)
- Safety Pilot (supervised pilot system, see gas installation requirements) Mandatory for CE models
- Lower Rack
- Special elevation available, contact factory

ACCESSORIES


- Divider for Pan cutouts
- MagiGriddle (Replaces top grid)
- 48" quick Disconnect gas hose and lanyard kit (mandatory for CE models)
- Back Shelf
- Slip On Cover
- Side and Back Extensions (N/A with back shelf)
- Smoker Box
- Equipment Stand

Project_

Item No._____

Quantity_____

Model FM-RMB/SMB 600 Series Floor Gas Charbroiler

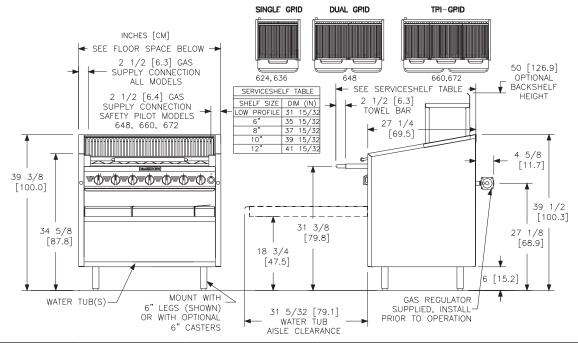

INDIVIDUAL CHARBROILER SPECIFICATIONS							
CM Size		624 / 624-H	636 / 636-H	648 / 648-H	660 / 660-Н	672 / 672-H	
Gas BTU/HR	Standard Output	60,000Btu (17.6 kW)	105,000Btu (30.8 kW)	150,000Btu (44.0 kW)	195,000Btu (57.2 kW)	240,000Btu (70 kW)	
	High Output	80,000Btu (23.4 kW)	140,000Btu (41.0 kW)	200,000Btu (58.6 kW)	260,000Btu (76.2 kW)	320,000Btu (94.1kW)	
Burners		4	7	10	13	16	
Cooking Area		513 in ² (3,314 cm ²)	810 in ² (5,233 cm ²)	1107 in ² (7,145 cm ²)	1404 in ² (9,063cm ²)	1704 in ² (11,001cm ²)	
Floor Space		24" x 35-1/2" (61 x 90 cm)	36" x 35-1/2" (91 x 90 cm)	48 x 35-1/2" (122 x 90 cm)	60" x 35-1/2" (152 x 90 cm)	72" x 35-1/2" (183 x 90 cm)	
Crumb Trays		1	1	2	2	3	
Top Grids	Floating Steel	1 20 3/4 x 24 3/4" (52.7 x 62.9cm)	1 32 3/4 x 24 3/4" (83.2 x 62.9 cm)	2 22 3/8 x 24 3/4" (56.8 x 62.9 cm)	1 20 3/4 x 24 3/4" (52.7 x 62.9 cm)	1 24 1/8 x 24 3/4" (61.3 x 62.9 cm)	
		Floating Steel grids are st MagiKrome Round Rods, spacing 3/16" (0.48cm)	andard as round rods with stand Scround Rod with Standard spac	2 18 x 24 3/4" (45.7 x 62.9 cm)	2 22 3/8 x 24 3/4" (56.8 x 62.9 cm)		
	Cast Iron	3	5	7	9	11	
Cast Iron g	rids are 6 1/4 x 22 5/8	8" (15.9 x 57.5cm), Reversil	ole with Thick(1/4") and Thin(1/32	") Marking. Cast Grids are av	/ailable in Standard(5/16"), or	r Fish(3/16") spacing.	
Shipping Weight		401 lbs. (182 kg)	555 lbs. (252 kg)	685 lbs. (311 kg)	900 lbs. (408 kg)	998 lbs. (306.2 kg)	
Shipping Crate H x W x L		28 x 42 x 40"	30 x 42 x 40"	50 x 54 x 46"	42 x 66 x 54"	36 x 48 x 84"	
Shipping Cube		31.5 ft ³ (0.9m ³)	56.9 ft ³ (1.6m ³)	82.0 ft ³ (2.3m ³)	82.0 ft ³ (2.3m ³)	82.0 ft3 (2.3m3)	

SHIPPING INFORMATION (Approximate) LxWxH						
GAS PRESSURE REQUIREMENTS			GAS CONNECTION REQUIREMENTS			
Natural Gas LP Gas			Models without Safety Pilots	Models with Safety Pilots		
Supply Pressure*	7 - 10" W.C (17.4 mbars/ 1.74 kPa)	11 - 13" W.C. (27.4 mbars/ 2.74 kPa)	 3/4" Gas Regulator shipped unattached , 3/4" NPT supply pipe connection 	624, 636 (1) 1/2" to 3/4" adaptor & (1) 3/4" Gas Regulator shipped unattached, (1) 1/2" NPT supply pipe	648, 660, 672 (2) 1/2" to 3/4" adaptor & (2) 3/4" Gas Regulator shipped unattached, (2) 1/2" NPT supply pipe	
Burner Pressure	4" W.C. (10 mbars / 1 kPa)	10" W.C. (25 mbars / 2.4 kPa)	Gas Regulator MUST be installed to broiler gas supply prior to connecting gas line.			
* Check plumbing / gas codes for proper gas supply line sizing to sustain burner pressure when all gas appliances are full on.						

CLEARANCES (Can Not Be Flush Mounted)							
		Combustible material		Noncombustible material		Charbroiler Flue area	
Front min	Floor min.	Sides min.	Rear min.	Sides min.	Rear min.	Do not block / restrict flue gases from flowing into hood or install	
30" (76.2 cm)	4" (10.2 cm)	6" (15.2 cm)	8" (20.3 cm)	0" (0.0 cm)	0" (0.0 cm)	hood drains over the flue.	
SHORT FORM SPECIFICATION							
Provide MagiKitch'n model CM- RMB 6xx radiant or CM-SMB 6xx ceramic coal low profile counter charbroiler. Unit shall be gas heated and shall cook by means of gas burners.							

Unit shall be double-walled stainless steel construction, and fully insulated on all sides. Provide with independent gas burners. Individual burner controls shall be mounted every 4 to 4-1/2 inches for flexible use. Convertible design allows operator to quickly change from radiant to coal style cooking with an optional conversion kit.

MagiKitch'n

265 Hobson St., Smithville, TN 37166

P: 800-264-7827 | F: 314-781-5445 | W: magikitchn.com | L10-136 Rev-6 8/20

We reserve the right to change specifications without notice and without incurring any obligation for equipment previously or subsequently sold.