



Job _____

Item No. _____

WELLS MODEL: B-44 CHAR BROILER



SPECIFICATIONS

- **Temperature Settings:** OFF/LO to HI
- **Number of Controls:** 1
- **Pre-Heat Time to 600°:** 10 minutes

TYPICAL PRODUCTION	PER LOAD	PER HOUR
Hamburgers	25	350
Steaks	9	81

GRID SURFACE DIMENSIONS

WIDTH	DEPTH	AREA
16	20	320 in ²
406	508	0.21 m ²

FEATURES

- **The self-cleaning element** is positioned between the broiler grate ribs to protect against direct food contact and spatula abrasion. The element also provides dual heating action (conductive and radiant).
- **Temperature** is regulated by an infinite control that has a positive-off position and a signal light to indicate a power-on condition.
- **Element frame** has a spring-loaded support rod to secure element when in a raised position.
- **Lift-out, drawn drip pan with handles** and removable **cast iron grate** allow fast and easy cleaning
- **Control** is mounted with a protective guard ring to help prevent accidental temperature changes
- **A terminal block** is provided for field connection to the main power supply
- Each unit is provided with a **grate scraper/brush** and **4" adjustable metal legs**
- **The B-44 Broiler** is Underwriters Laboratories, Inc. LISTED and meets NSF International standards.
- **Limited one-year parts and one year labor warranty**

DESCRIPTION

Wells B-44 countertop broiler has a stainless steel top and sides, making it one of the most durable in the industry. The self-cleaning element is protected by a heavy-duty cast-iron grate and provides dual heating action, using both conductive and radiant heat.

WARRANTY

These units come with a one [1] year warranty for parts and labor.

CERTIFICATIONS



WELLS MANUFACTURING INTERNATIONAL INC.

265 Hobson Street • Smithville, Tennessee 37166

Telephone 800 264-7827 • www.wells-mfg.com

Printed in the U.S.A. • 2M-37087 • Rev F • 10.2021
Specifications are subject to change without notice
and are not intended for installation purposes.



Job _____


Item No. _____

WELLS MODEL: B-44 CHAR BROILER

DIMENSIONS:

$\frac{\text{INCH}}{\text{(MM)}}$

MINIMUM CLEARANCE REQUIRED FROM UNIT TO THE NEAREST SURFACE.			
BACK	SIDE	BOTTOM	TOP
6	7	4	30
(152)	(178)	(102)	(762)

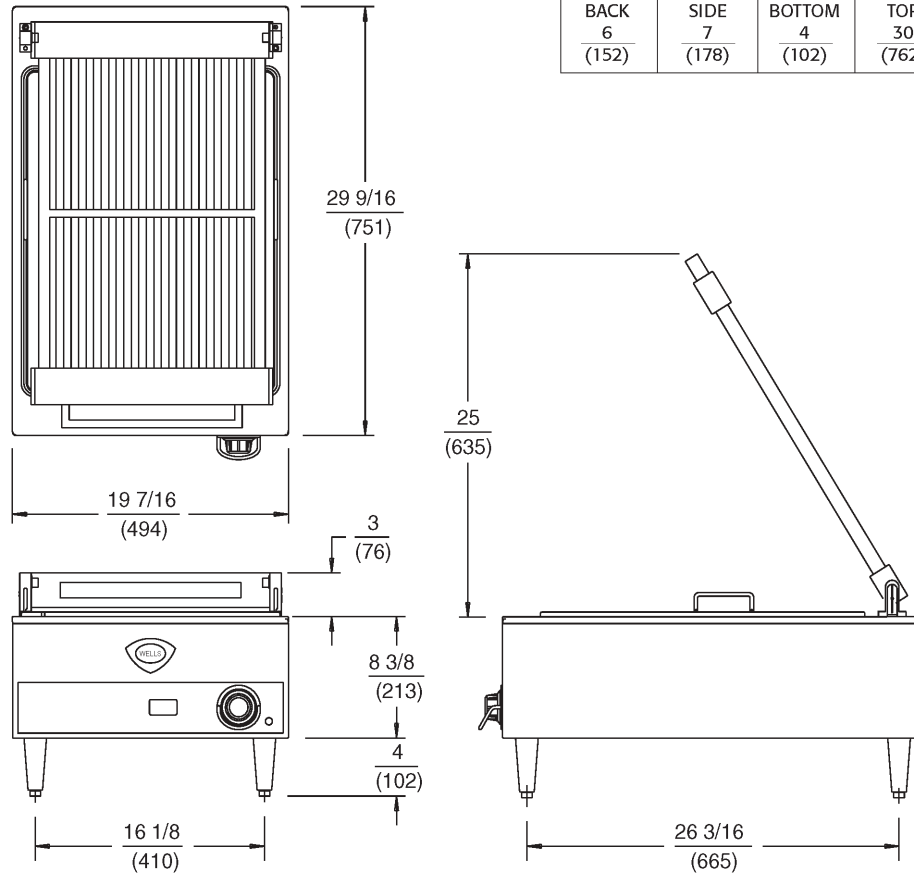

MODEL	HEIGHT* in. (mm)	WIDTH in. (mm)	DEPTH in. (mm)	VOLTS	WATTS	Hz	PHASE	AMPS	APPROX. SHIP WEIGHT	APPROX. INSTALL WEIGHT
B-44	15 3/8 (391)	19 7/16 (494)	29 9/16 (751)	208V	5400	50/60	1Ø	26	85 lb. (39.0 kg)	80 lb. (36.0 kg)

*Height includes 4" legs



NEMA 6-30P

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Star Manufacturing exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.



WELLS MANUFACTURING INTERNATIONAL INC.

265 Hobson Street • Smithville, Tennessee 37166
Telephone 800 264-7827 • www.wells-mfg.com

Printed in the U.S.A. • 2M-37087 • Rev F • 10.2021
Specifications are subject to change without notice and are not intended for installation purposes.