



HT Series Bain Marie Style Warmers Standard and Large Capacity Single-Opening, Two to Five Well-Sized, Heavy Duty, Top-Mount, Rectangular Drop-Ins



Model HT-200AF



Model HT-300

DESCRIPTION

Wells HT Series Bain Marie Style, heavy-duty, top-mount, drop-in food warmers are designed to hold heated foods at safe and fresh serving temperatures. These single-opening, large-capacity heated tanks provide consistent temperatures and can accommodate a variety of round or rectangular inset pans. Wells Bain Marie warmers are economical and are available with standard or extra-large openings, with or without auto fill. Drains are standard. Designed for wet operation only.

SPECIFICATIONS

Construction – One-piece stainless steel top flange and heavy-gauge, deep-drawn stainless steel warming pans are standard features on all models. Wellsloks™ are standard for quick and easy installation.

Insulation – Sides, front, back and bottom are fully insulated for energy savings, efficiency, quicker pre-heat and faster recovery.

Controls & Heating- Positive-off thermostats control the element allowing for adjustable and consistent temperatures. A temperature- ready single light indicates that the heating element is energized. Control is recessed in a one-piece, drawn, stainless steel panel for ease of use and to help prevent accidental adjustments. Powerful tubular heating elements are located under the warming pan for quick and efficient heating and for even heat distribution.

Additional Features Available

- Auto Water-Fill to maintain proper water level.
- Select Models are field convertible from 1Ø to 3Ø
- Extra-Large 27" deep tanks to accommodate addition insets

STANDARD FEATURES

- Accommodates a variety of round or rectangular insets or equivalent fractional pans
- One-piece stainless steel top flange and heavy-gauge, deep-drawn stainless steel warming pans
- Designed for wet operation
- Energy-saving fully-insulated construction
- Fully insulated models are perfect for non-metal counters
- Positive-off thermostat controls
- Controls are recessed in a one-piece, drawn, front-mounted panel
- High limits prevent overheating
- Wellslok™ standard for ease of installation
- Powerful tubular heating elements
- 1/2" drains standard
- Cords & Plugs available
- 1-Year limited parts & 1-Year limited labor warranty

OPTIONS & ACCESSORIES

- Adaptor tops for round insets
- Insets with lid
- 72" control panel wiring
- Drain value extension kit
- Drain screens
- Wellslok extension kits for wood counter installations

CERTIFICATIONS







HT Series Bain Marie Style Warmers

Standard and Large Capacity Single-Opening, Two to Five Well-Sized, Heavy Duty, Top-Mount, Rectangular Drop-Ins

INCHES
MM

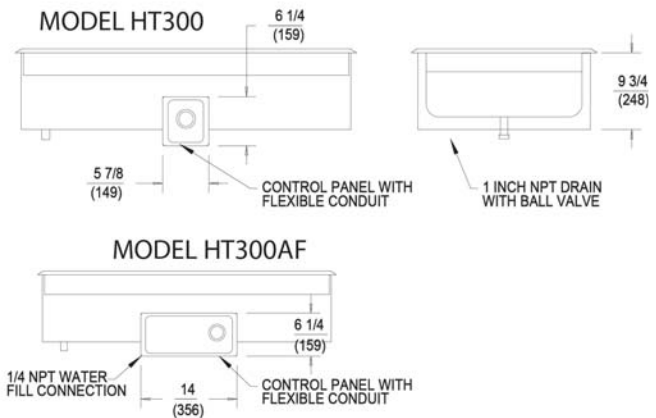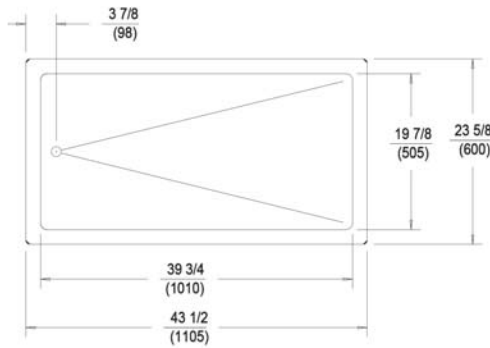

NOTE: Specifications are subject to change without notice and are not intended for installation purposes. See installation instructions prior to installing the unit.

SPECIFICATIONS

| Model Number | Description & Opening Size | Volts & AMPS @ 240V | Watts | Phase | Standard Power Cord Supply | OVERALL Width Inches (MM) | OVERALL Length Inches (MM) | OVERALL Height Inches (MM) | CONTROL PANEL Width Inches (MM) | CONTROL PANEL Height Inches (MM) | Shipping Weights Pounds (KG) | Crate Size Cubic Feet (Cubic Meters) | Approvals |
|--|--|---------------------|-------------|-------|----------------------------|---------------------------|----------------------------|----------------------------|---------------------------------|----------------------------------|------------------------------|--------------------------------------|-----------|
| Standard Pan Size Openings | | | | | | | | | | | | | |
| HT200 | Double 12 x 20 Pan- Size Opening 25 3/4" x 19 7/8" | 208/240V 10.0 | 1800/2400 | 1Ø | NONE | 29-1/2 (749) | 23-5/8 (600) | 9-3/4 (248) | 5-7/8 (248) | 6-1/4 (159) | 56 (26) | 7.89 (0.233) | UL US |
| HT300 | 3- 12x20 Pan-Size Opening 39 3/4" x 19 7/8" | 208/240V 15.0 | 2700/3600 | 1Ø | NONE | 43-1/2 (1105) | 23-5/8 (600) | 9-3/4 (248) | 5-7/8 (248) | 6-1/4 (159) | 63 (29) | 10.54 (0.298) | UL US |
| HT400* | 4- 12x 20 Pan Size Opening 53 3/4" x 19 7/8" | 208/240V 20.0 | 3600/4800 | 1Ø* | NONE | 57-1/2 (1461) | 23-5/8 (600) | 9-3/4 (248) | 14 (356) | 6-1/4 (159) | 98 (45) | 13.56 (0.383) | UL US |
| HT500* | 5- 12x20 Pan Size Opening 67 3/4" x 19 7/8" | 208/240V 25.0 | 4500/6000 | 1Ø* | NONE | 71-1/2 (1816) | 23-5/8 (600) | 9-3/4 (248) | 14 (356) | 6-1/4 (159) | 115 (52) | 16.57 (.469) | UL US |
| Large Capacity 4/3 Pan Size Opening | | | | | | | | | | | | | |
| HT227 | 2- 4/3rd Pan- Size Opening 25 3/4" x 26 7/8" | 208/240V 13.8 | 2480/3300 | 1Ø | NONE | 29-1/2 (749) | 30-5/8 (779) | 9-3/4 (248) | 5-7/8 (248) | 6-1/4 (159) | 59 (27) | 10.15 (0.287) | UL US |
| HT327 | 3- 4/3rd Pan- Size Opening 39 3/4" x 26 7/8" | 208/240V 20.6 | 3720/4950 | 1Ø | NONE | 43-1/2 (1105) | 30-5/8 (779) | 9-3/4 (248) | 5-7/8 (248) | 6-1/4 (159) | 85 (39) | 12.45 (0.352) | UL US |
| HT427* | 4- 4/3rd Pan- Size Opening 52 3/4" x 26 7/8" | 208/240V 27.5 | 4960/6600 | 1Ø* | NONE | 57-1/2 (1461) | 30-5/8 (779) | 9-3/4 (248) | 14 (356) | 6-1/4 (159) | 126 (57) | 15.58 (.449) | UL US |
| HT527* | 5- 4/3rd Pan- Size Opening 67 3/4" x 26 7/8" | 208/240V 34.4 | 6200/8250 | 1Ø* | NONE | 71-1/2 (1816) | 30-5/8 (779) | 9-3/4 (248) | 14 (356) | 6-1/4 (159) | 148 (67) | 19.15 (.542) | UL US |
| Standard & Large Capacity, 4/3 Pan Size Openings with Auto Fill | | | | | | | | | | | | | |
| HT200AF | Double 12 x 20 Pan- Size Opening 25 3/4" x 19 7/8" With Auto Fill | 208/240V 10.0 | 1800/2400 | 1Ø | NONE | 29-1/2 (749) | 23-5/8 (600) | 9-3/4 (248) | 14 (356) | 6-1/4 (159) | 57 (26) | 7.89 (.223) | UL US |
| HT227AF | 2- 4/3rd Pan- Size Opening 25 3/4" x 26 7/8" with Auto Fill | 208/240V 13.8 | 2480/3300 | 1Ø | NONE | 29-1/2 (749) | 30-5/8 (779) | 9-3/4 (248) | 14 (356) | 6-1/4 (159) | 65 (30) | 10.15 (.287) | UL US |
| HT300AF | 3- 12x20 Pan-Size Opening 39 3/4" x 19 7/8" with Auto Fill | 208/240V 15.0 | 2700/3600 | 1Ø | NONE | 43-1/2 (1105) | 23-5/8 (600) | 9-3/4 (248) | 14 (356) | 6-1/4 (159) | 77 (35) | 10.54 (.298) | UL US |
| HT327AF | 3- 4/3rd Pan- Size Opening 39 3/4" x 26 7/8" with Auto Fill | 208/240V 20.6 | 3720/4950 | 1Ø | NONE | 43-1/2 (1105) | 30-5/8 (779) | 9-3/4 (248) | 14 (356) | 6-1/4 (159) | 96 (44) | 15.85 (.449) | UL US |
| HT400AF* | 4- 12x 20 Pan Size Opening 53 3/4" x 19 7/8" with Auto Fill | 208/240V 20.0 | 3600/4800 | 1Ø* | NONE | 57-1/2 (1461) | 23-5/8 (600) | 9-3/4 (248) | 18 (457) | 6-1/4 (159) | 98 (45) | 13.56 (.384) | UL US |
| HT427AF* | 4- 4/3rd Pan- Size Opening 52 3/4" x 26 7/8" with Auto Fill | 208/240V 27.5 | 4960/6600 | 1Ø* | NONE | 57-1/2 (1461) | 30-5/8 (779) | 9-3/4 (248) | 18 (457) | 6-1/4 (159) | 112 (51) | 19.15 (.542) | UL US |
| HT500AF* | 5- 12x20 Pan Size Opening 67 3/4" x 19 7/8" with Auto Fill | 208/240V 25 | 4500 / 6000 | 1Ø* | NONE | 71-1/2 (1816) | 23-5/8 (600) | 9-3/4 (248) | 18 (457) | 6-1/4 (159) | 117 (53) | 16.57 (.469) | UL US |
| HT527AF* | 5- 4/3rd Pan- Size Opening 67 3/4" x 26 7/8" with Auto Fill | 208/240V 34.4 | 6200 / 8250 | 1Ø* | NONE | 71-1/2 (1816) | 30-5/8 (779) | 9-3/4 (248) | 18 (457) | 6-1/4 (159) | 136 (62) | 37.3 (1.056) | UL US |

* Select models are fieldconvertiblefrom3Øto1Ø

Auto-fill models require a water connection. Please refer to the owner's manual and/or installation instructions for details.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Wells exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.



Wells Manufacturing • 265 Hobson Street • Smithville, Tennessee 37166 U.S.A.
Phone : (314) 678-6314 • Fax (314) 781-3636
www.wells-mfg.com • Printed in the U.S.A.

Specifications are subject to change without notice and are not intended for installation purposes. See installation instructions prior to installing the unit.