



MOD200 SERIES-TWO WELL TOP-MOUNT, RECTANGULAR DROP-IN WARMERS

**MOD200**

DESCRIPTION

Wells heavy-duty Modular food warmers are designed to hold heated foods at safe and fresh serving temperatures. Wells MOD200 Series accommodates two 12" X 20" standard food pans or equivalent fractional inset pans that are designed for wet or dry operation.

SPECIFICATIONS

Construction - One-piece stainless steel top flange and heavy-gauge, deep-drawn stainless steel warming pans are standard features on all models. Wellsloks are standard for quick and easy installation.

Insulation - Sides, front, back and bottom are fully insulated for energy savings, efficiency, quicker pre-heat and faster recovery.

Controls & Heating - Individual controls for each well provide maximum versatility. Models with thermostatic or infinite controls are available. High-limits prevent overheating. Temperature-ready indicator lights are standard on all control types. Powerful tubular heating elements are located under the warming pans for quick and efficient heating and for even heat distribution.

STANDARD FEATURES

- Accommodates 2 - 12" x 20" standard inset pans or equivalent fractional pans
- One-piece stainless steel top flange and heavy-gauge, deep-drawn stainless steel warming pans
- Suitable for wet or dry operation (wet recommended for best results)
- Energy-saving fully-insulated construction
- Fully Insulated models are perfect for non-metal counters
- Thermostatic or infinite controls
- Separate controls for each individual wells
- High limits prevent overheating
- Thermostatic controls are recessed in a one-piece, front-mounted panel
- Wellslok standard for ease of installation
- Powerful tubular heating elements
- 1/2" drains and manifolds available
- Cords and plugs available for 208/240V models
- One year Limited Parts & One Year Limited Labor Warranty

ADDITIONAL FEATURES

- Auto water-fill to maintain proper water level.
- Select models are field convertible from 3ø to 1ø
- Drains & Drains with manifolds
- Thermostatic or infinite controls


OPTIONS & ACCESSORIES

- Adaptor tops for round insets
- Inset with lid
- 8oz. soup ladle
- Drain valve extension kit
- Drain screens
- Wellslok extension kits for wood counter installations
- Cords & plugs available on all 208/240V models
- Optional 72" wiring





MOD200 SERIES-TWO WELL TOP-MOUNT, RECTANGULAR DROP-IN WARMERS

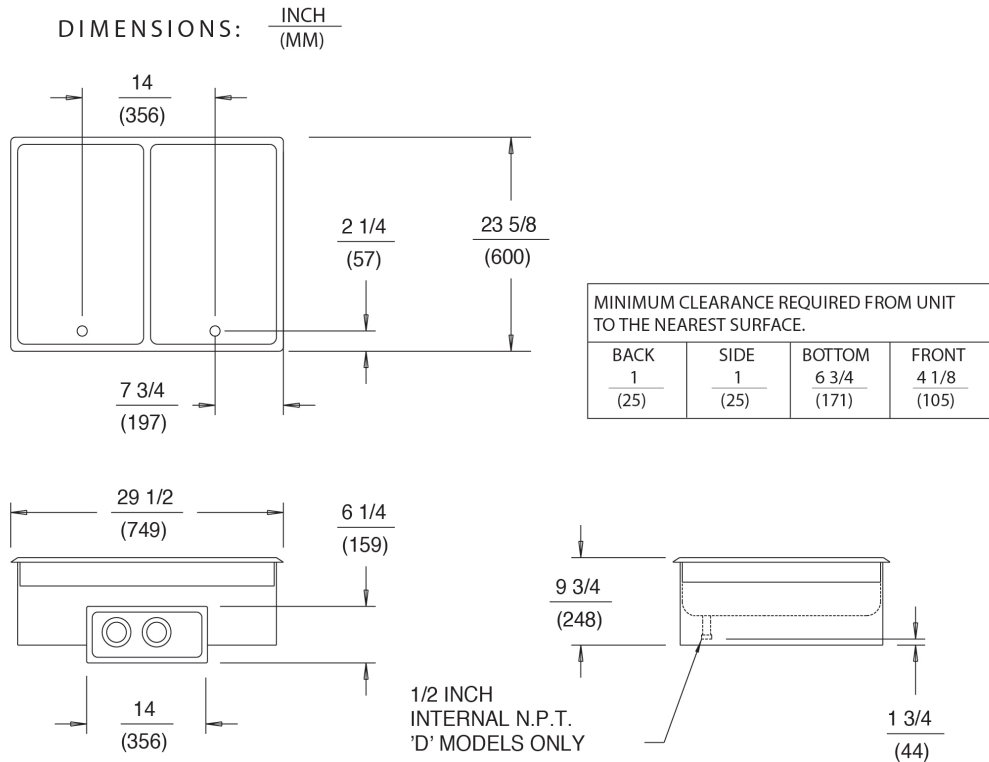

MODELS	DESCRIPTION	VOLTS	WATTS	PHASE	OVERALL (mm)			PANEL (mm)		SHIP (kg)	CRATE SIZE	APPROVED
					WIDTH	LENGTH	HEIGHT	WIDTH	HEIGHT			
MOD200	Infinite controls no drain	208/ 240V	900/ 1200	1Ø	29.5 (749)	23.6 (600)	9.75 (248)	14 (356)	6.25 (159)	51 (23.2)	7.89 (.384)	NSF UL
MOD200CSA	Infinite controls no drain	208/ 240V	900/ 800	1Ø	29.5 (749)	23.6 (600)	9.75 (248)	14 (356)	6.25 (159)	51 (23.2)	7.89 (.384)	NSF SF
MOD200D ¹	Infinite controls w/drain	208/ 240V	900/ 1200	1Ø	29.5 (749)	23.6 (600)	9.75 (248)	14 (356)	6.25 (159)	51 (23.2)	7.89 (.384)	NSF UL
MOD200DM ¹	Infinite controls w/drain & manifold	208/ 240V	900/ 1200	1Ø	29.5 (749)	23.6 (600)	9.75 (248)	14 (356)	6.25 (159)	51 (23.2)	7.89 (.384)	NSF UL
MOD200T ¹	Thermostatic controls no drain	208/ 240V	1240/ 1650	1Ø	29.5 (749)	23.6 (600)	9.75 (248)	14 (356)	6.25 (159)	51 (23.2)	7.89 (.384)	NSF UL
MOD200TD ¹	Thermostatic controls w/drain	208/ 240V	1240/ 1650	1Ø	29.5 (749)	23.6 (600)	9.75 (248)	14 (356)	6.25 (159)	51 (23.2)	7.89 (.384)	NSF UL
MOD200TDM ¹	Thermostatic controls w/drain & manifold	208/ 240V	1240/ 1650	1Ø	29.5 (749)	23.6 (600)	9.75 (248)	14 (356)	6.25 (159)	51 (23.2)	7.89 (.384)	NSF UL
MOD200TDMAF ¹	Thermostatic controls w/drain, manifold, auto-fill	208/ 240V	1240/ 1650	1Ø	29.5 (749)	23.6 (600)	9.75 (248)	14 (356)	6.25 (159)	56 (25.5)	7.89 (.384)	NSF UL

¹Optional factory-attached cordset available at additional cost.

AutoFill models require a water connection. Please refer to the operator's manual and installation instructions for details.



Sheet No. MOD2 [03/18]



Wells Manufacturing · 265 Hobson Street, Smithville, TN 37166 U.S.A.
Phone (314) 678-6314 · Fax (314) 781-5445 · www.wells-mfg.com · Printed in the U.S.A.

NOTE: Specifications are subject to change without notice and are not intended for installation purposes. See installation instructions prior to installing the unit.