

# RWN-16, RWN-26, RWN-36 BUILT-IN NARROW DRAWER WARMERS

RWN-16, RWN-26, RWN-36 BUILT-IN NARROW DRAWER WARMERS



RWN-26

Wells Built-In Narrow Drawer Warmers can keep a variety of foods hot and ready to serve. Their compact width saves valuable space, yet the drawers accept all standard 12" x 20" pans up to 6" deep. All Wells warmers come with individual controls on each drawer for temperature and humidity, allowing food to be hot and crispy in one drawer, warm and moist in another.

### Features

- **Narrow width saves space** while accommodating standard 12"x20" pans.
- **Exclusive self-latching mechanism** provides easy, one-touch, secure closing.
- **Individual thermostatic temperature control** on each drawer gives these warmers maximum versatility.
- **Durable stainless steel tracks and bearings** provide smooth, trouble-free operation.
- **Adjustable front vent** on each drawer allows for humidity control.
- **A stainless steel pan** is provided with each drawer and is capable of holding a standard 12" x 20" pan.
- **Fully insulated** for maximum efficiency.
- **Models with optional built-in thermometer (T)** are NSF approved for potentially hazardous foods.
- **The RWN series Drawer Warmers** are Underwriters Laboratories, Inc. LISTED and meet NSF International and Canadian standards.
- **A one-year warranty** against defects covers parts and labor.

### Specifications

Overall Dimensions:	Inches	MM
Width	20 1/4	514
Depth	26 1/2	673
Height		
RWN-16 series	10 7/8	276
RWN-26 series	21	533
RWN-36 series	31 1/8	790
Temperature Range:	Fahrenheit	Celsius
RWN series	90° to 210°	32° to 99°
Pre-Heat Time to 175° F:	120V & 240V	208V
RWN series	15 minutes	22 minutes
Typical Capacity:	Dinner Rolls	
Individual drawer	Approx. 8 doz.	
Weights:	Lbs.	KG
<b>RWN-16 series:</b>		
Installed	51	23
Shipping	63	29
<b>RWN-26 series:</b>		
Installed	96	44
Shipping	120	54
<b>RWN-36 series:</b>		
Installed	155	70
Shipping	191	87

### Accessories / Options

**Humitrol Rack**, stainless steel, one per drawer, non-splash, 20624


**Optional Built-in Thermometer (T)**, for individual drawers, contact factory





**MODEL  
RWN-16  
BUILT-IN NARROW  
DRAWER WARMER**

**DIMENSIONS:**       $\frac{\text{INCH}}{\text{(MM)}}$

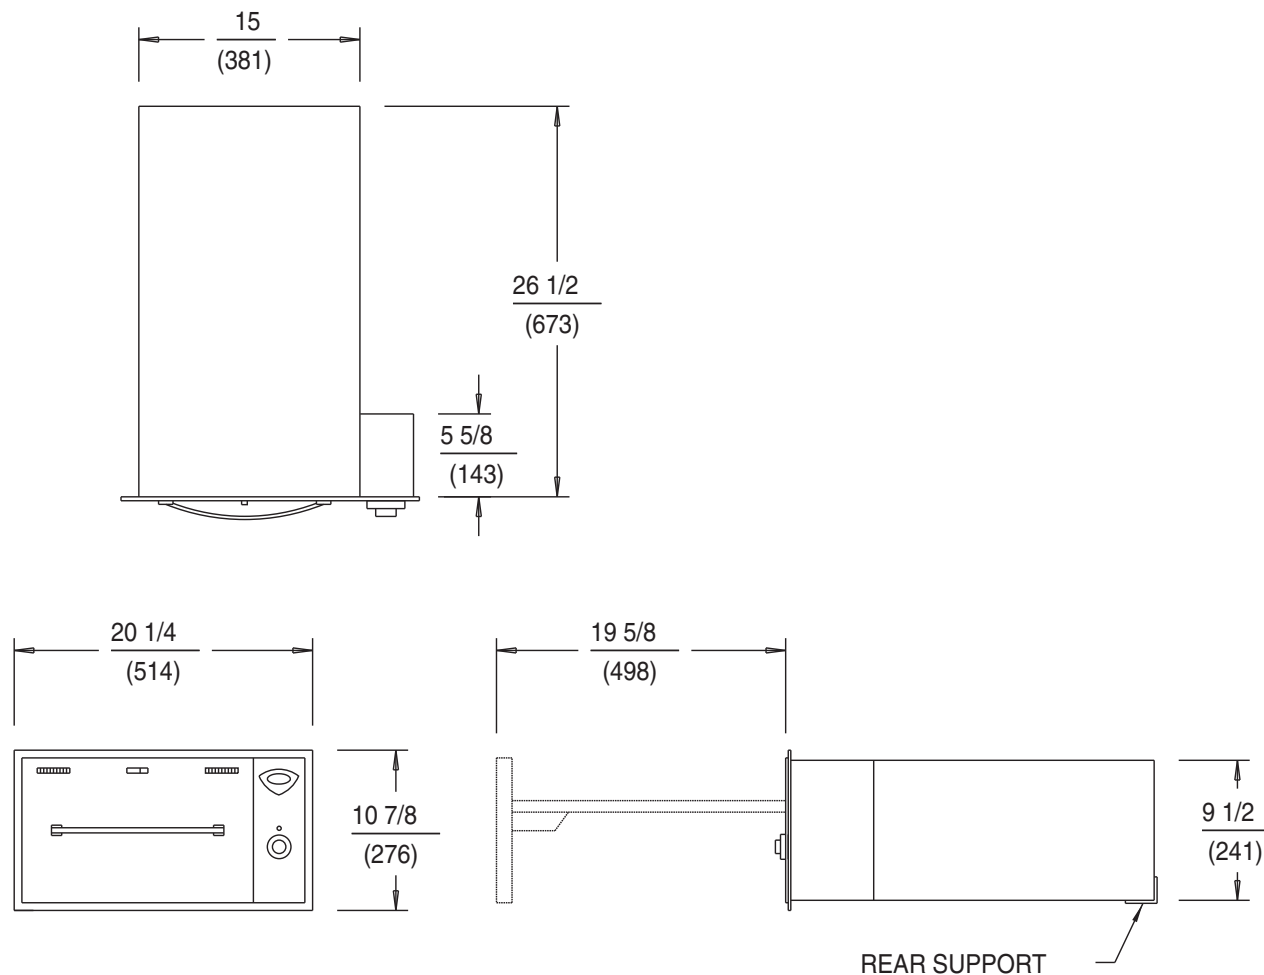

**RWN-16 ELECTRICAL SPECIFICATIONS:**

MODELS*	VOLTS	WATTS	AMPS	PHASE	POWER SUPPLY CORD
RWN-16	120	450	3.8	SINGLE	NONE
RWN-16	208	338	1.6	SINGLE	NONE
RWN-16	240	450	1.9	SINGLE	NONE

\*RWN-16 models are provided with a thermometer and have the same electrical specifications as the standard models.


NOTE: Specifications are subject to change without notice. See installation instructions prior to installing the unit. This document is not for installation purposes.



**MODEL  
RWN-26  
BUILT-IN NARROW  
DRAWER WARMER**

**DIMENSIONS:**

INCH  
(MM)

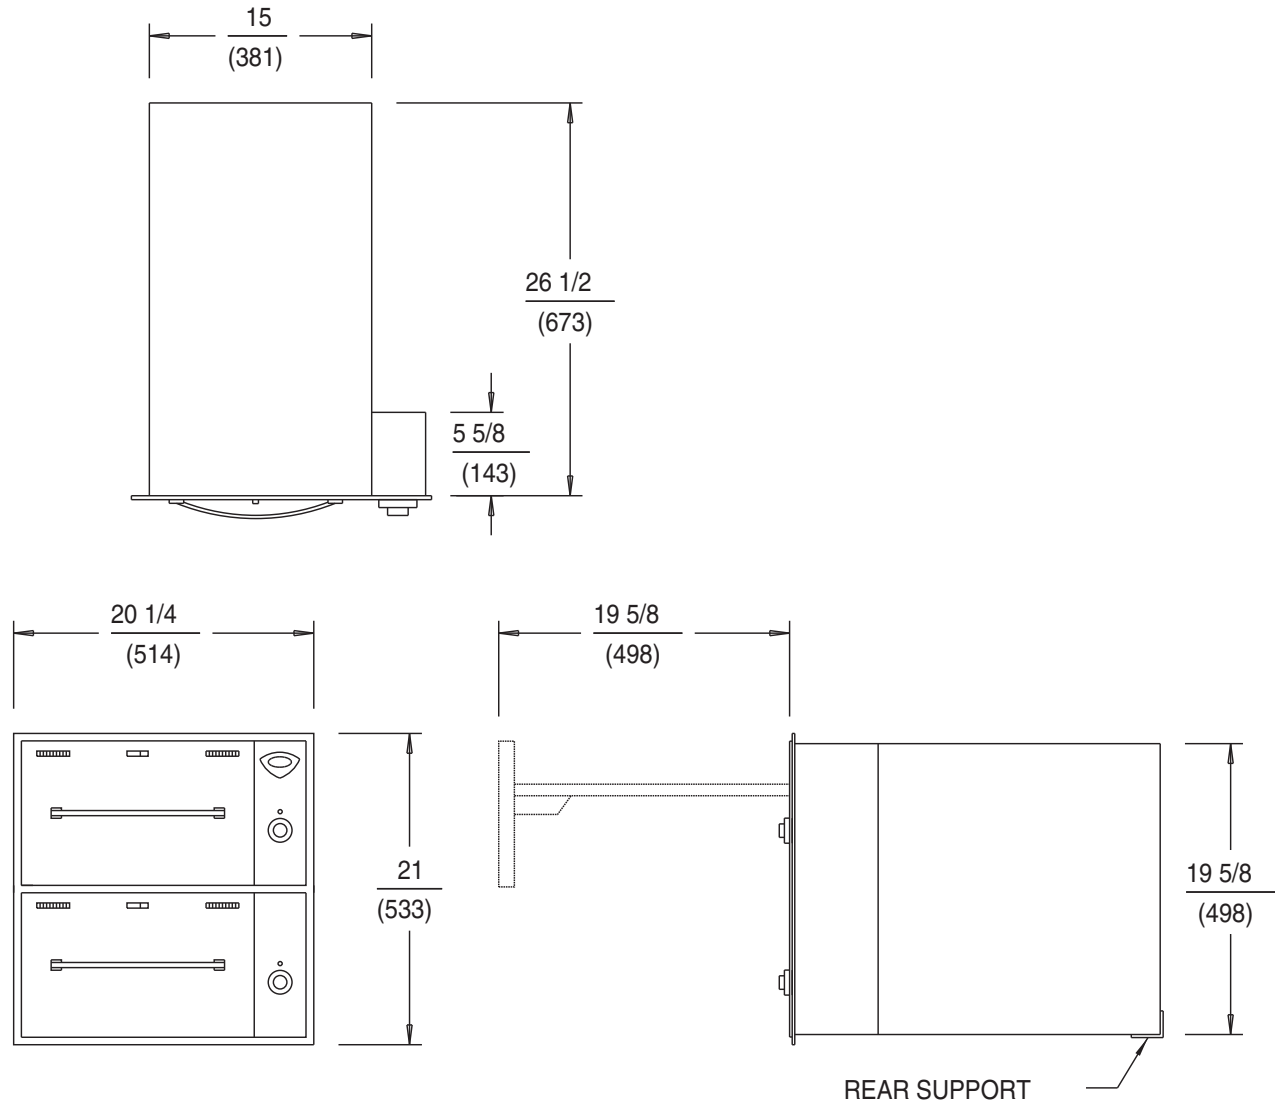

**RWN-26 ELECTRICAL SPECIFICATIONS:**

MODELS*	VOLTS	WATTS	AMPS	PHASE	POWER SUPPLY CORD
RWN-26	120	900	7.5	SINGLE	NONE
RWN-26	208	676	3.3	SINGLE	NONE
RWN-26	240	900	3.8	SINGLE	NONE


\* RWNT-26 models are provided with a thermometer and have the same electrical specifications as the standard models.

NOTE: Specifications are subject to change without notice. See installation instructions prior to installing the unit. This document is not for installation purposes.



**MODEL  
RWN-36  
BUILT-IN NARROW  
DRAWER WARMER**

**DIMENSIONS:**       $\frac{\text{INCH}}{\text{(MM)}}$

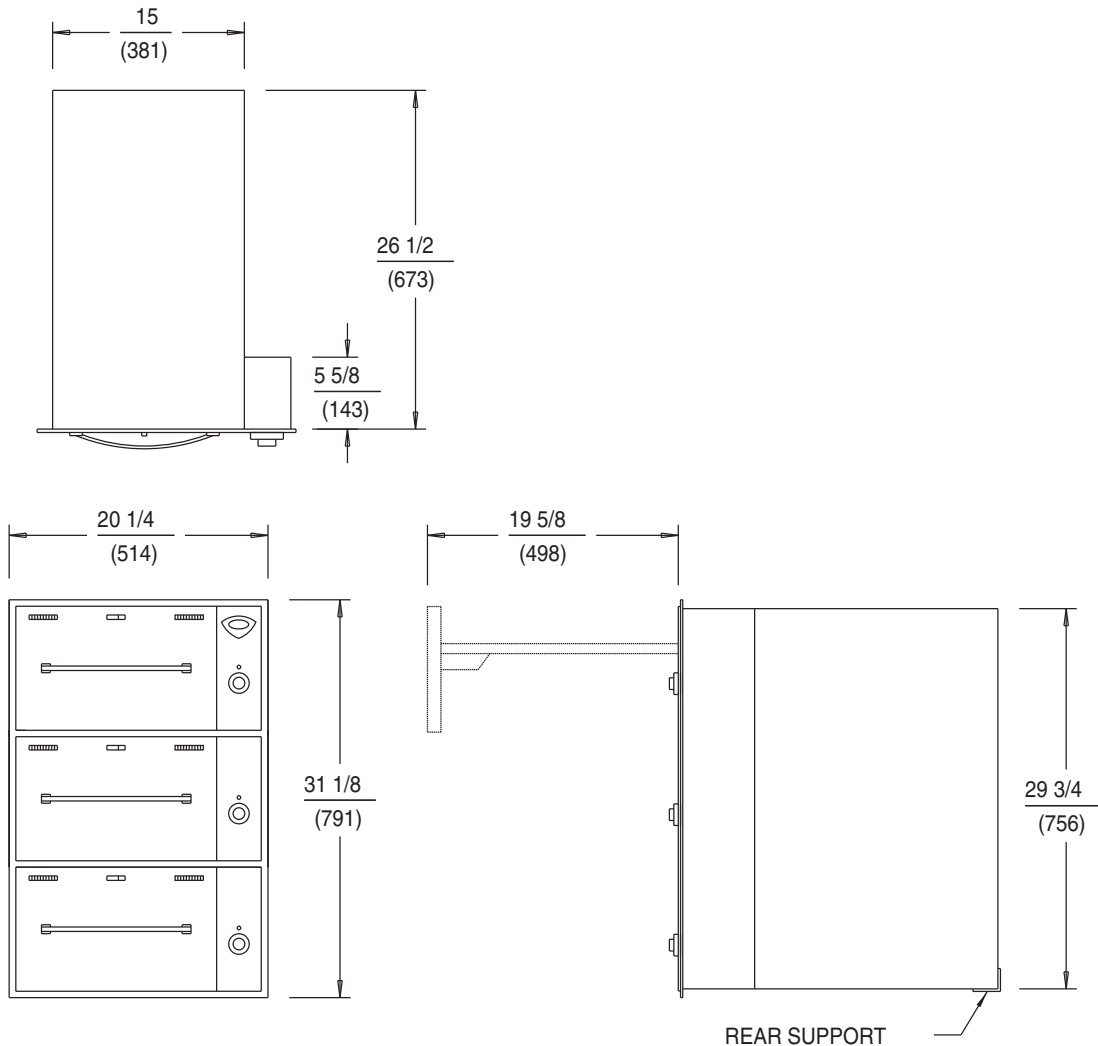

**RWN-36 ELECTRICAL SPECIFICATIONS:**

MODELS*	VOLTS	WATTS	AMPS	PHASE	POWER SUPPLY CORD
RWN-36	120	1350	11.3	SINGLE	NONE
RWN-36	208	1014	4.9	SINGLE	NONE
RWN-36	240	1350	5.6	SINGLE	NONE

\* RWNT-36 models are provided with a thermometer and have the same electrical specifications as the standard models.

NOTE: Specifications are subject to change without notice. See installation instructions prior to installing the unit. This document is not for installation purposes.

**Wells Manufacturing**  
 265 Hobson Street • Smithville, Tennessee 37166 U.S.A.  
 PHONE: (775) 689-5700 • FAX: (775) 689-5972 • www.wells-mfg.com  
 Printed in the U.S.A. • 03/18 • Rev. F • 2M-49340

