

G**GAS COUNTERTOP
TILTING SQUARE SKILLET**

JOB NAME: _____

ITEM NO.: _____

NO. REQUIRED: _____

MODEL

- 1600G** - 16 gallon (60 liter) gas tilting countertop skillet

DESCRIPTION

A Market Forge Model 1600G, gas fired counter tilting skillet, AGA/CGA and NSF Certified. The skillet shall be of one piece covered corner, 10 gauge type 316 stainless steel with a #4 exterior finish and a polished interior with covered corners for ease of cleaning. Cooking surface shall be of 3/4" triple-ply construction with 3/8" thick aluminum core ensuring even heat distribution over the entire cooking surface. Pan shall be fitted with side pivots mounted in sealed stainless steel clad consoles mounted on a 10 gauge stainless steel base with #4 finish. Pan shall be fitted with a stainless steel tilt handle with heat proof knob to tilt the pan forward for complete removal of contents and will include a damper control for tilt and return movements for ease of tilting. A tilt interlock shall prevent inadvertent tilting of the pan.

Controls shall be integrally mounted and shall include a power switch, solid state thermostat, temperature pilot light, electronic ignition, ignition light, and a high limit temperature cut-off. Burner turns off automatically when pan is tilted.

The skillet shall operate in a temperature range of 100-450°F (38-232°C).

The skillet can be mounted on a 30-1/2"(775 mm) wide stainless steel stand with sliding drain pan and stationary drain.

STANDARD FEATURES

- One piece 10 gauge type 316 stainless steel pan and cooking surface
- 3/4" triple ply pan construction with aluminum core
- All stainless steel exterior
- Tilt lock for upright pan position
- Solid state thermostat temperature control
- Damper assist for smooth tilting action
- Solid state electronic ignition

OPERATION SHALL BE BY

- Gas fired operating on 115 VAC, 1 phase, 50/60 Hz, rated at 63,000 BTU
 - Natural Gas
 - LP gas

SHIPPING WEIGHT

- Braising pan only - 290 lbs (132 kg)
- With optional stand - 360 lbs (164 kg)



Shown with optional stand and faucet

OPTIONS & ACCESSORIES

(at additional charge)

- **Pantry Faucets**
 - Double pantry faucet with 12" swing spout
 - Single pantry faucet with 12" swing spout
- **Kettle Fillers**
 - Single pantry kettle filler, 68" hose and bracket
 - Double pantry kettle filler, 68" hose and bracket
- **Spray Hoses**
 - Single pantry 68" spray hose with bracket
 - Double pantry 68" spray hose with bracket
- **Etched Markings**
 - Etched gallon markings
 - Etched litre markings
- Steam pan insert
- Pour lip strainer
- One piece lift-off stainless steel cover
- 18" (460mm) tall floor stand with sliding drain pan and stationary drain
- 220 VAC, 1 phase, 50/60 hz.
- Correctional package

FOOD SERVICE EQUIPMENT
Square Countertop Skillet



MARKET FORGE

SERVICE CONNECTIONS

EC	Unless otherwise specified, Field Wire Electrical Connection to be 120 viktsm 60 Hz, single phase with grounding wire. Unit furnished with 8' cord and 3 promg plug. Total max. amps 2.0
GC	3/4" pipe supply line required
CW	3/8" O.D. tubing to faucet (optional)
HW	3/8" O.D. tubing to faucet (optional)


INSTALLATION CLEARANCE

Left Side	Right Side	Rear
3" (76mm)	3" (76mm)	8" (203mm)

GAS SUPPLY

Water Column Pressures		BTU/HR	kW/HR
Natural Gas	Propane	63,000	18.5
3.5" (89mm) minimum	11" (279mm) minimum		

FOOD SERVICE EQUIPMENT
Square Countertop Skillet

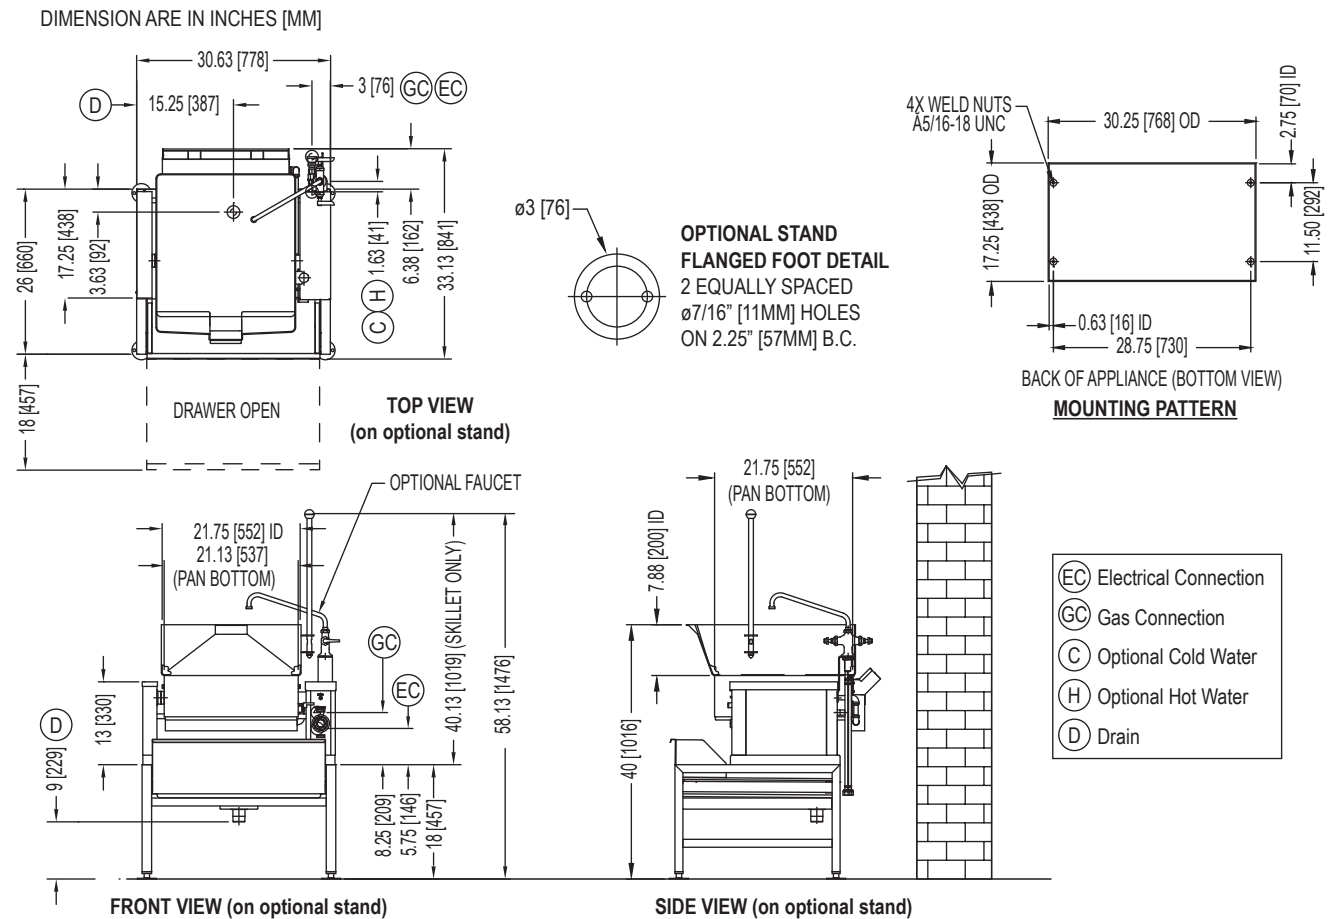

The manufacturer reserves the right to modify materials and specifications without notice.