

Reach-In Double Door Refrigerator models 2020

□ 2020M □ 2020EM-XXXX* □ 2020M-XXXX*

Description:

model

Randell Series 2000 Reach-Inare built for years of efficient, high performance service. The top mounted, expansion valve refrigeration system offers the highest, most consistent performance available while maximizing usable interior space.

□ 2020 □ 2020E □ 2020EM

Specifications:

CABINET EXTERIOR: Cabinet body is constructed of all metal, inside & out. The top, bottom, & back are galvanized steel. Front and sides are available in finishes as listed above. Doors and louver are stainless steel and are removable without tools. Unit on 6" casters, front two are locking.

CABINET INTERIOR: Interior of cabinet is fully coved to meet N.S.F. standard #7. The interior walls, ceiling and door liner are available in either stainless steel or anodized aluminum as listed above. Foamed in place, CFC free urethane insulation. Snap-in A.B.S. breaker strips.

DOORS: Stainless steel front with either anodized aluminum or stainless steel liner, mounted on heavy duty cam lift hinges with automatic light switch, heavy duty chrome handle, cylinder door lock.

REFRIGERATION: Top mounted condensing unit and evaporator coil, expansion valve system with thermostatic control, factory tested and balanced to maintain 38° F. average interior temperature utilizing CFC free 134a refrigerant. Evaporator coil is coated to resist corrosion. Unit supplied with master on/off switch and 8' cord and plug. Access to service points without tools is standard.

Finishes:

- Standard Series Doors/Louver: Stainless steel. Exterior Sides: Anodized aluminum. Interior: Anodized aluminum
- E Series (Add Suffix "E") Cabinet interior, exterior sides, fronts, and doors stainless steel.

Standard Features:

- Expansion Valve
- Exterior LED Temperature Display
- Top mounted Compressor & Evaporator Coil
- C.F.C. Free R-134a Refrigerant
- · Efficient Hot Gas Condensate Evaporator

model 2020 shown





Standard Features Continued:

- Automatic Defrost
- 8' Cord & Plug
- Main Power Supply Switch
- Self-Closing Cam Lift Hinges with 120° Open Feature (Lifetime Warranty)
- Automatic Interior Light on door
- 6" Casters Factory Mounted (Front two Locking)
- Cylinder Door Locks
- Fully Coved Interior Meeting N.S.F. Standard #7
- Polyurethane Insulation
- 3 Baked Epoxy Coated Wire Shelves Per Section With Stainless Steel Support Clips (Adjustable every 1")
- Snap-In Magnetic Door Gaskets

Options & Accessories (Add Suffix "M"):


	Universal Tray Slides (set of two) Qty Sets	
	1/2 Doors 🗌 Solid Qty Location	
	6" Legs	
	Extra Interior Shelves Qty	
	(maximum of (23) or (20) additional on 1.5" centers-leaves 1" clear)	
	Finished Back	
	Export Voltage(s) Specify Voltage	
	Prison Package	
	Blade Locks in Lieu of Cylinder Locks	33°F to 41°F
Ref	rigeration Type (Add Suffix "R"): Remote	

*XXXX=Signifies customer specific model, consult factory

1055 Mendell Davis Drive, Jackson, MS 39272 888-994-7636, unifiedbrands.net Information contained in this document is known to be current and accurate at the time of printing/creation. Unified Brands recommends referencing our product line websites, unifiedbrands.net, for the most updated product information and specifications.

Randell Reach-In, Page 5 PP SPEC0023 Rev. B Revised 11/07

A City Discount

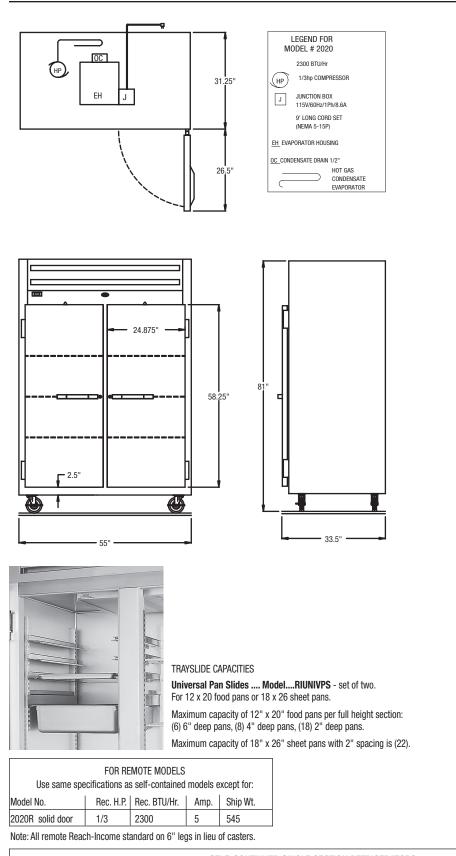

energy
ENERGY STAR





NSF

SELF-CONTAINED SINGLE SECTION REFRIGERATORS

	Model	L	D	H	Doors	Cu./Ft.	Shelves	Shelves Sq. Ft.	HP	Volt	Amps	NEMA	BTU Rating	Ship Wt.
	2020 solid door	55"	33 1/2"	81.25"	2	46.08	6	26	1/3	115/60/1	8.6	5-15P	2300*	595
*Decod on 00° ombient and 10° executer														

*Based on 90° ambient and -10° evaporator.



1055 Mendell Davis Drive, Jackson, MS 39272, 888-994-7636, unifiedbrands.net Information contained in this document is known to be current and accurate at the time of printing/creation. Unified Brands recommends referencing our product line websites, unifiedbrands.net, for the most updated product information and specifications. A City Discount