

Star Manufacturing International, Inc.



STAR-MAX® 30 lb. ELECTRIC FRYER Model 530FD

Features/Benefits:

- ★ Star-Max 30 lb. electric countertop fryer is designed for high volume operations and offers excellent frying flexibility for many types of menu items.
- ★ One-piece 30 lb. lift-out nickel plated steel kettle for easy straining of oils.
- ★ Immersion tubular heating elements provide even heat distribution and swing up making cleaning a snap.
- ★ Snap-action thermostat ranges from 200°F to 375°F and provides quick response to temperature change.
- ★ Hi-limit safety thermostat, on/off switch and two indicator lights provide safe and easy operation.
- ★ Two large nickel plated steel mesh side hanging baskets (8-3/4"W x 5-1/4"D x 10"L) provide continuous flow of product during peak periods
- ★ All stainless steel cabinet for maintenance free operation.
- ★ Heavy-duty 4" adjustable legs to match the height of other Star-Max equipment in your line.

Applications:

Star-Max 30lb. electric fryer requires only 24" of counter space and designed for high volume operations. No matter what the menu items; onion rings, fries, chicken or fish, Star-Max electric fryer will meet your operation's demand.

Quality Construction:

Star-Max 30lb. electric fryer features all stainless steel construction with attractive black polycarbonate label. Snap-action thermostat ranges from 200°F to 375°F. A one-piece nickel plated steel lift-out kettle with tubular two position swing up elements. A terminal block for making line connections is provided, fryer operates on 208 or 240 volts.

Warranty:

Star-Max electric fryer is covered by Star's one year parts and labor warranty.



Model 530FD



Model 530FD with Optional Equipment Stand with Casters








Star Manufacturing International Inc. - 10 Sunnen Drive - P.O. Box 430129 - St. Louis, MO 63143-3800

Phone: (800) 264-7827 - FAX: (800) 264-6666 - www.star-mfg.com



Star Manufacturing International, Inc

STAR-MAX[®] 30 lb. ELECTRIC FRYER Model 530FD

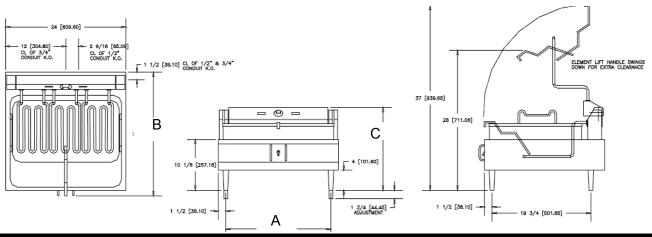

Performance Data						
Model No.	Pre-Heat to 350°F	Fat Capacity	Pounds of French Fries Watts	Maintain 350°F		
			Per Hour	Per Hour		
			rei noui	Ferrioui		

Dimension	ons & Weight					
		Overall Dimension	s			
	(A)	(B)	(C)	Cooking Surface	Approximate Weight	
	Width	Depth	Height	Height	Installed	Shipping
Model	Inches	Inches	Inches	Inches	lbs.	lbs.
No.	(cm)	(cm)	(cm)	(cm)	(kg)	(kg)
530FD	24	24-3/4	16-5/8	10-1/2	63	92
	(61.0)	(62.9)	(42.3)	(26.7)	(28.6)	(41.75)
	Fat Container			Foam Compartment		
	Width	Depth	Height	Width	Depth	Height
Model	Inches	Inches	Inches	Inches	Inches	Inches
No.	(cm)	(cm)	(cm)	(cm)	(cm)	(cm)
530FD	20-7/8	12-1/2	4-3/4	21-7/8	18	2-3/4
	(53.0)	(31.6)	(12.1)	(55.6)	(45.7)	(7.0)

Legs Adjustable 4" to 5-3/8" (10.2 cm to 13.7 cm)

Electrical Data					
Model	Rated Wattage		Nominal Amps Per Line		
No.	208V	240V	Single Phase	Three Phase	
			208V 240V	208V 240V	
530FD	8640	11500	41.5 47.9	24 27.7	

Typical Specifications

Electric fryer has a stainless steel body with black polycarbonate trim on the front panel. A 200°F - 375°F (93°C - 191°C) adjustable thermostat and a hi-limit safety thermostat, and a separate on-off switch are standard. A one piece nickel plated, lift out 30 lb. (13.5 kg) capacity steel kettle and 4° heavy-duty adjustable legs are standard. Unit has a tubular type, two position, swing-up element with a rated wattage of 11,500 watts on 240 volts. Two side mounted nickel plated, perforated steel mesh baskets are provided as standard. A terminal block for making line connections is provided, fryer operates on 208 or 240 volts. UL listed to US and Canadian standards. IUL Classified to NSF STD 4. Printed in the U.S.A.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Star Manufacturing exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

Star Manufacturing International Inc. - 10 Sunnen Drive - P.O. Box 430129 - St. Louis, MO 63143-3800

Phone: (800) 264-7827 - FAX: (800) 264-6666 - www.star-mfg.com