

# 6690



MODEL 6690

## FROZEN BEVERAGE FREEZER

Single flavor, Counter-top

### Product Offering

Vary your menu by offering shakes & smoothies or frozen cocktails, fruit juices, coffees, cappuccino and tea slush beverages, all served at the desired thickness.

### Freezing Cylinder

One, 6.9 Liter (7.3 quarts)

### Mix Hopper

One, 25 Liters (21.3 quarts)

Refrigerated to maintain mix below 4°C (40°F)

Approved for dairy and non-dairy products.

### Indicator Lights

Add Mix light alerts the operator to add mix.

When Mix Out light turns ON, the unit automatically shuts down to prevent damage.

### Automatic Consistency Control

Specially designed viscosity control automatically maintains superior product quality. Adjustable control allows the operator to serve a wide variety of frozen beverages at the desired thickness.

### Output


40 quarts per hour

### Safety Protections

- High pressure switch prevents compressor overheat.
- Thermal overload protects from motor overheat.



60Hz. Model Shown

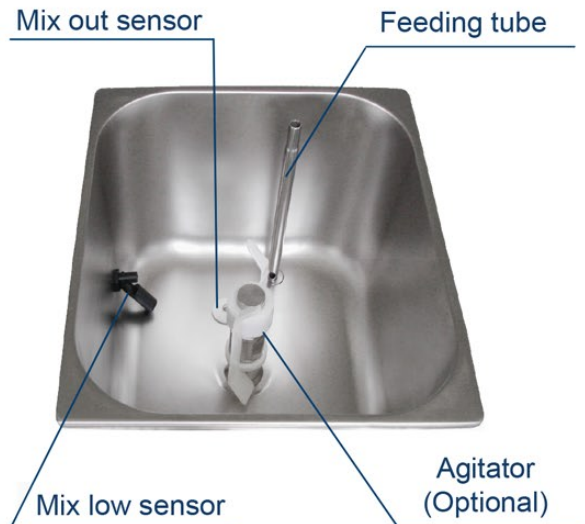



3-24-2014

### SPACEMAN USA

CORPORATE OFFICE: 4699 NAUTILUS CT S #100 | BOULDER, CO 80301

PHONE: (888) 610-5520

WEB: WWW.SPACEMANUSA.COM

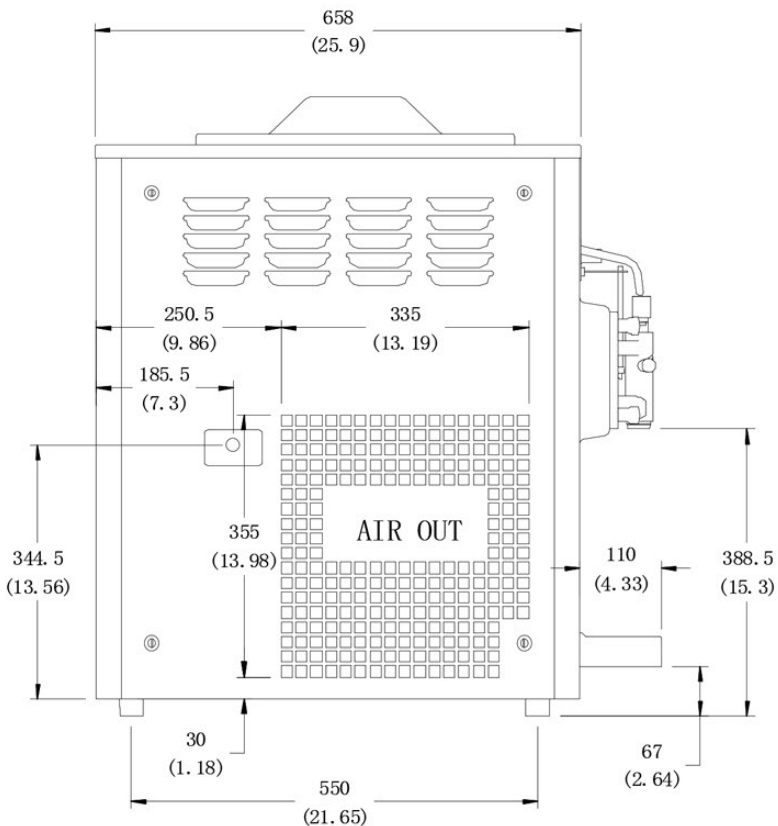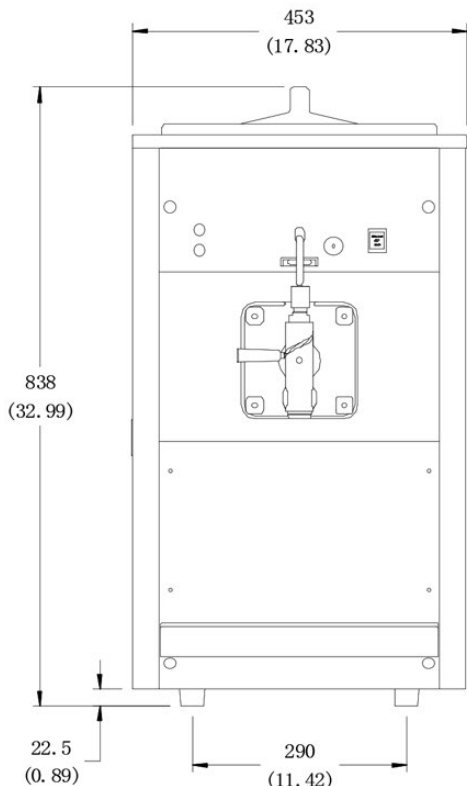

Weight	Kg / lb
Net	123 / 271
Shipping	137 / 302

**Packaging Volume** 0.46 CBM / 16.36 CBF

Dimensions	Net (mm/in)	Shipping (mm/in)
Width	453 / 17.8	510 / 20.1
Depth	658 / 25.9	845 / 33.3
Height	838 / 33.0	1075 / 42.3

Electrical	Maximum Fuse Size	Min. Circuit Ampacity	Poles (P) Wires(W)
208-230/60/1	20	15	3P/3W

*This unit may be manufactured in other electrical characteristics. Refer to the local distributor for availability.  
(For exact electrical information, always refer to the data label of the unit.)*

**Note**  
Continuing research results in steady improvements, therefore, these specifications are subject to change without notice.

**Specifications**

**Electrical**

One dedicated electrical connection is required. Unit shall be cord connected or permanently connected. Consult your local Spaceman distributor for available cord & receptacle specifications as per local codes.

**Motor**

One, 4/5HP

**Refrigeration System**

One Compressor: 15,000BTU/HR, R404A (BTUs may vary depending on compressor used.)

**Air Cooled**

Minimum clearance of 152mm (6") on both sides is required to achieve optimum performance. The rear of the unit may be placed against a wall Max room temperature 95° F