

Item No	 	
Quantity_		

Model Nos. 8027-SLT, 8036-SLT, 8045W-SLT Silverstone 8027S-SLT, 8036S-SLT, 8045SW-SLT GripsIt 8027SX-SLT, 8036SX-SLT, 8045SXW-SLT

Hot Dog Roller Grills (Slanted)



8027-SLT



NEMCO Food Equipment, Ltd. 301 Meuse Argonne P.O. Box 305 Hicksville, OH 43526 Phone (419) 542-7751 FAX (419) 542-6690 www.nemcofoodequip.com

When it comes to making money, you can't go wrong with an original. And now, with the special merchandising feature of slanted rollers, an original has gotten even better. Operators will tell you Nemco—the original hot dog roller grill—has always been famous for its superior diehard cooking performance. Its time-tested, maintenance-free design will serve you for years and forever satisfy your customers with the tastiest, juiciest hot dogs. 360° roller rotation prevents residue buildup, while individual roller heating elements ensure heating consistency. Removable drip pan makes for easy cleaning. Requires no ventilation system. Seven heat settings offer versatile temperature control. Front and rear rollers have their own heat controls. This feature permits shutting off one section during non peak hours. New Non Slip Coating available, *GripsIt*-this coating makes clean up easy for those sugary-coated, non-hot dog products

Standard Features:

and breakfast items.

- Rugged stainless steel and aluminum construction
- Simplest installation plugs into any outlet with corresponding voltage
- Rollers available in either standard chrome, non-stick coating or *GripsIt* which cleans easily with just a damp sponge
- Two individual heat controls for front and rear rollers
- Temperature control with seven heat settings
- Roller grills slant 7° for effective merchandising
- Individual heating element in each roller with superior temperature consistency from end to end
- Sealed motor with ball bearings to prevent grease leakage out of motor
- Rollers rotate at a complete 360° turn by means of roller sprocket, motor sprocket and chain
- End bearing and grease barrier double protect against grease seepage
- Removable grease drip pan
- Preheat time is 20 minutes
- Full one year factory warranty
- NSF listed and UL listed

Accessories:

- Food Safety Guards available for all roller grills; offers sanitary protection
- Heated and humidified Bun Warmers keep buns fresh and ready to serve
- Bun boxes come in a variety of sizes for great merchandising
- Stainless steel Condiment Bars and Stations provide a neat and efficient way to provide condiments
- Stainless steel Mobile stands are especially built for Nemco roller grills and include shelves and 5" heavy duty casters

Model Nos.

8027-SLT 8036-SLT 8045W-SLT


Silverstone


8027S-SLT 8036S-SLT

8045SW-SLT

Non Slip GripsIt

8027SX-SLT 8036SX-SLT 8045SXW-SLT

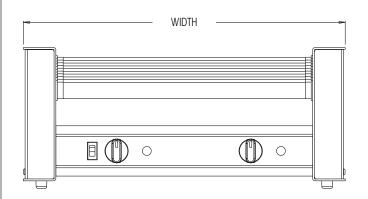



Model No.	Hot Dog Capacity	Width Inches/(cm)	Depth Inches/(cm)	Height Inches/(cm)	Voltage	Wattage	Nominal Amps	# of Cords NEMA Configuration	Unit Weight bs./(kg.)	Shipping Weight Ibs./(kg.)
8027-SLT, 8027S-SLT, 8027SX-SLT	27	22 1/4 (56.5)	16 ¹ /4 (41.3)	10 ¹ /4 (26.0)	120	950	7.9	(1)5-15 plug	37 (16.8)	44 (20.0)
8027-SLT-220, 8027S-SLT-220, 8027SX-SLT-220	27	22 1/4 (56.5)	16 ¹ /4 (41.3)	10 ¹ /4 (26.0)	220	950	4.3	(1)6-15 plug	37 (16.8)	44 (20.0)
8036-SLT, 8036S-SLT, 8036SX-SLT	36	29 ¹ / ₂ (74.9)	16 ¹ /4 (41.3)	10 ¹ /4 (26.0)	120	1500	12.5	(1)5-15 plug	48 (21.8)	55 (23.6)
8036-SLT-220, 8036S-SLT-220, 8036SX-SLT-220	36		16 ¹ /4 (41.3)			1500	6.8	(1)6-15 plug	48 (21.8)	55 (23.6)
8045W-SLT, 8045SW-SLT, 8045SXW-SLT	45		16 ¹ /4 (41.3)			1800	15	(1)5-15 plug	54 (24.5)	63 (28.2)
8045W-SLT-220, 8045SW-SLT-220, 8045SXW-SLT-220	45	35 1/2 (90.2)	16 ¹ /4 (41.3)	10 1/4 (26.0)	220	1800	8.2	(1)6-15 plug	54 (24.5)	63 (28.2)

⁽S) Denotes special non-stick coating

Typical Specifications

Roller Grill shall be stainless steel and heavy-duty aluminum construction and use non-stick coated slip grip or chrome rollers and tubular heating elements. Rollers slant from front to rear of unit by 7° for effective merchandising. One element shall be contained in each roller. Seven setting infinite temperature control provides flexible cooking and holding. Unit shall have a sealed motor with ball bearings for long life. Each roller shall have a PTFE end bearing and FEP grease barrier combination. The unit shall be equipped with a pilot light, lighted rocker switch and operate on 120V with (1) 6' cord and NEMA 5-15P, 5-20P and on 220V with a 6' cord and NEMA 6-15P. Roller grills shall carry the approval of UL (120V,220V) and shall be listed with the National Sanitation Foundation.





⁽SX) Denotes special non-slip GripsIt coating