

Universal Ledge Racks

Welded Aluminum



Model 8535

Ideal transport and storage for a wide variety of pans, trays and containers.

- Durable, lightweight welded aluminum construction.
- Rugged square tubing frame provides durability and long life.
- Accommodates a variety of pans, trays, or storage boxes.
- Ledges are 6-1/4" wide and are welded on 4 1/2" centers.
- All seams are fully welded and sealed to provide a smooth, easy-to-clean surface. No cracks or crevices to trap dirt!
- Welded corner gussets maintain square unit integrity.
- Casters are 5" swivel plate type with No-Mark® polyurethane tread.
- NSF listed.



Specifications:

Shall be constructed of hi-tensile, corrosion resistant, rust proof, primary extruded aluminum, Type 6063-T5 alloy. All seams shall be heli-arc welded with all welded and sealed (no rivets). Vertical uprights shall be extruded tube, 1 1/4" x 1 1/2" x .070 wall. Top and bottom frames shall be extruded tube, 1 1/4" x 1 1/2" x .070 wall, welded and shall be welded to uprights. Bottom frame has caster plates (pre-tapped), 3/8" thick, welded to frame so that casters are inset. Gussets of 1 1/2" x 1 1/2" x 5/8" thick angle are welded to the inside angles (bottom side) where horizontal cross bracing meets vertical uprights with a 4-1/2" continuous weld. Two each tie rods of 1" x 1" x .070 wall extruded tube shall be welded to uprights. Extruded angle ledges are a stepped type, 2" x 6 1/4" x .100 thick, with all corners chamfered and deburred. Ledges are welded to uprights on 4-1/2" centers. Casters shall be all swivel with 5" diameter, non-marking polyurethane tire, 1-1/4" wide, with an operating temperature range of -25°F to +190°F. Wheel bearings shall be sealed and permanently lubricated.



Lakeside Manufacturing, Inc.


4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.

800-558-8565 • 414-902-6400 • Fax 414-902-6446 • www.eLakeside.com

Universal Ledge Racks

Welded Aluminum

Spec #

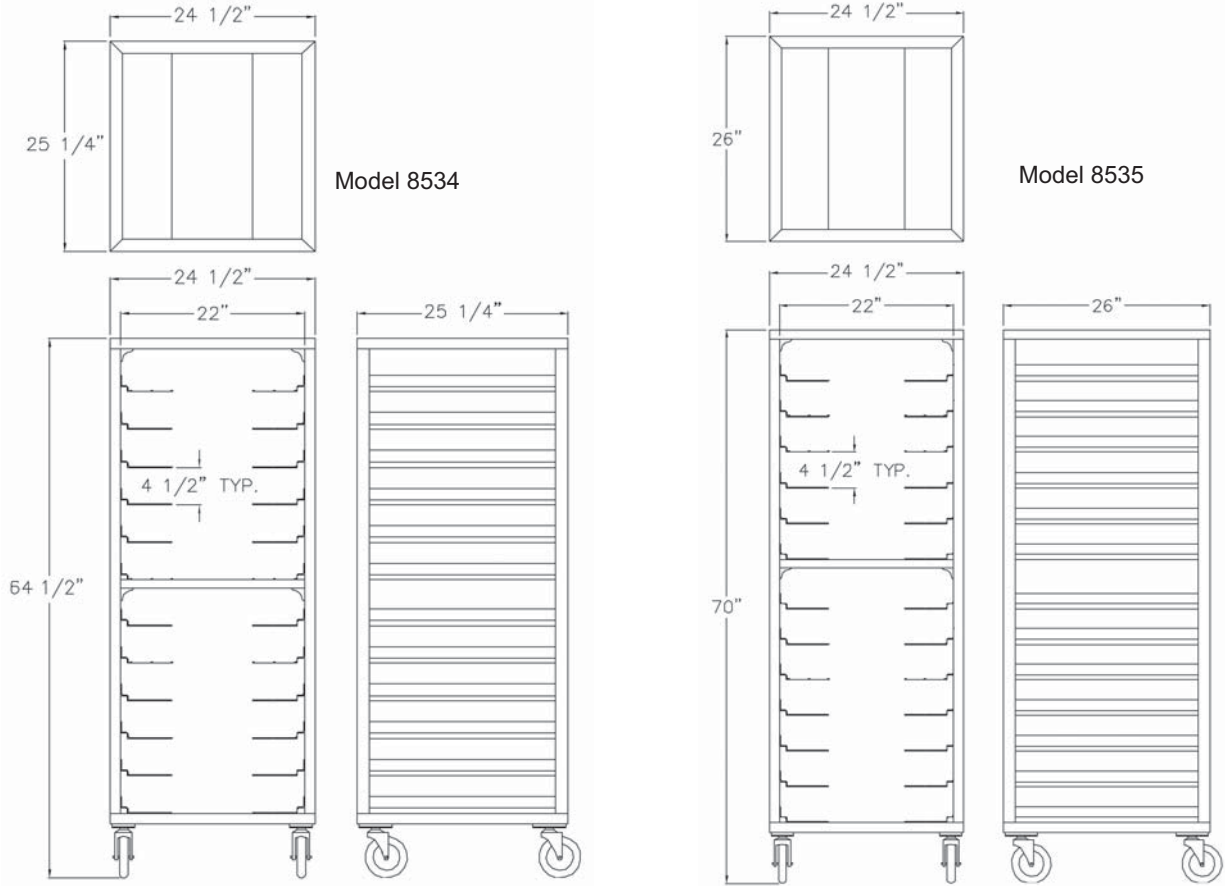

Dimensions:

Model	Number Of Ledges (Pair)	Ledge		Overall Size			Case Wt.
		Type	Spacing	W	D	H	Lbs.
8534	12	Universal 6 1/4" Wide	4 1/2" (114)	24 1/2" (622)	25 1/4" 641	64 1/2" 1638)	90 (40.5 kg)
8535	13	Universal 6 1/4" Wide	4 1/2" (114)	24 1/2" (622)	26" 660	70" 1778)	92 (41.4 kg)

Pan, Tray, or Rack Capacity:

Pan/Tray/Rack	Model 8534	Model 8535
18" x 26"	12	13
16" x 22"	12	13
15" x 20"	12	13
14" x 18"	24	26
12" x 20" (4" High)	24	26
20" x 20" (4" High)	12	13

Options:

- Break casters (set of 2)
- Pan stop
- Perimeter bumper
- Bottom corner bumpers (set of 4)
- Vertical leg bumpers (set of 4)
- Solid sheet base

AIA #



Lakeside Manufacturing, Inc.
 4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.
 800-558-8565 • 414-902-6400 • Fax 414-902-6446 • www.eLakeside.com