



Exacting Standards, Just Like yours, since 1948

Project \_\_\_\_\_

Item Number \_\_\_\_\_

Quantity \_\_\_\_\_

8713M



# 8713M Premium Series Manual Slicer

**8713M:** 1/2HP Premium series slicer



**Certified by NSF International to Meet and Exceed the NSF/ ANSI 2010 standards**

13" Precision slicing German hollow ground blade  
Carriage detaches for easy washing/ sanitization  
Powerful 1/2 hp motor standard  
Unique smooth curve transitions to redirect liquids away from controls and operator

### Features:

- Heavy Duty, High Volume Slicer
- 13" Precision slicing German hollow ground blade
- Unique drip tray fence redirects liquids away from controls and operator towards distinctive concaved base casting for easy cleaning
- Ergonomic comfort design operation
- Gear driven blade
- Powerful 1/2 hp motor standard
- Adjustable slice thickness from 0 to 7/8"
- Capable of slicing ample amounts of cheese
- Easily removable sharpener for cleaning
- Quick and simple disassembly of carriage and feed grip for easy and thorough cleaning
- Sanitary polished & anodized aluminum construction
- Carriage easily detaches for ease of washing and sanitizing.

- Heavy duty 3-1/2 lb gravity feed grip
- Permanently mounted protective edge guard
- 3 inch legs make cleaning under slicer a breeze

### Optional Accessories:

- Stainless Steel Blade
- Serrated Blade
- Heavy Duty Clear Plastic Cover
- Stainless Steel Vegetable Chute
- Sturdy Stainless Steel Stand

### Warranty:

- 1 year, on-site parts and labor

#### Warranty Details

The 8713M carries a 1 year, on-site parts and labor warranty against any flaws in materials and workmanship. This period begins on the date of the purchase and, provided the unit is used in accordance with our instructions, is in full effect for 1 year from that date. Any work performed under this warranty must be performed between the hours of 8am and 5pm Monday through Friday. Univex will not pay for overtime charges for work performed other than during normal business hours. Damage incurred in transit or from installation error, accident, alteration or misuse is not covered. Univex shall not be liable for any consequential compensatory, incidental, or special damages. Contact the Univex service department for any warranty claims.

Univex Corporation

Premium Series Slicer



Univex Corporation  
[www.Univexcorp.com](http://www.Univexcorp.com)

3 Old Rockingham Rd  
Salem, NH 03079  
United States of America


Telephone (800) 258-6358  
Intl Tel. (603) 8936191  
Fax (800) 356-5614  
Intl Fax (603) 8931249



Exacting Standards, Just Like yours, since 1948

# 8713M Premium Slicer

# 8713M

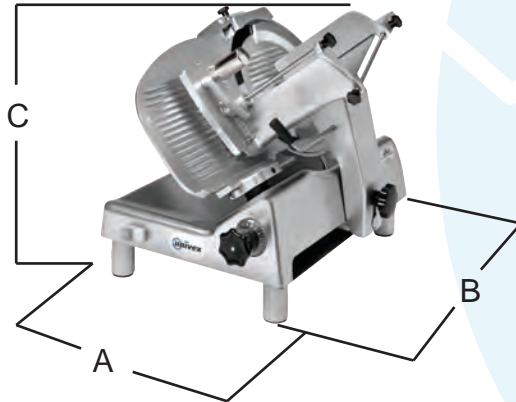

- A:** Width  
22.5" (57.15cm)
- B:** Depth  
30" (76.2cm)
- C:** Height  
22" (55.88cm)

Auto or Manual	Motor	Volts	Hz	Amps	Drive Type	Blade RPM	Cheese slicing	Blade Diameter	Max Slice	Product Cutting Capacity		
										Rec (Rectangle)	S (Square)	R (Round)
Manual	1680 RPM 1/2 HP (.37KW)	115V 220V	60 50-60	5.4amp 2.7amp	Gear Driven	300	Medium-High Volume	13" (33cm)	.875" (22.2mm)	10" x 6.5" (25.4cm x 16.5cm)	6.5" x 6.5" (16.5cm x 16.5cm)	9" (22.9cm)

Carriage stroke: 13" (33cm)

Controls: Manual slice thickness knob, push button on/off, attached blade sharpener

### NSF International certified ANSI/ NSF 8

This slicer is certified by NSF International to meet and exceed the NSF 8 standard.

Here is a list of highlighted features that are standard on our entire ANSI/ NSF8 certified slicer line:

- Improved liquid and food particle diversion from all control surfaces
- Improved seals and gaskets for longer life and greater sanitary standards
- Clear and easy to follow cleaning and sanitizing instructions

### Shipping Information:

Freight Class: 85  
 Net Weight: 106.6lbs (48.4kg)  
 Shipping Weight: 114.6lbs (52kg)

### Shipping Box Dimensions:

Height: 25.2" (640mm)  
 Width: 22.2" (565mm)  
 Length: 32.7" (830mm)



Univex Corporation  
[www.Univexcorp.com](http://www.Univexcorp.com)

3 Old Rockingham Rd  
 Salem, NH 03079  
 United States of America

Telephone (800) 258-6358  
 Intl Tel. (603) 8936191  
 Fax (800) 356-5614  
 Intl Fax (603) 8931249