



**Model #ADC-120**

### Cooling

Temperature Range	33°F-40°F
Refrigerant	R290°F
Max. Ambient Temperature	Automatic
Defrosting	
Temperature Controller	Digital
Horsepower	1/3

### Electrical

Voltage	115
Amps	5.8
Hz	60
Phase	1
Plug Type	NEMA-5-15P
Electrical Cord Length	84"

### Standard Features – Deli Case #ADC-120

- Environmentally safe R290 refrigerant
- Exterior is stainless steel top, front with painted sides
- Interior stainless steel floor
- High humidity gravity coil refrigeration for optimal freshness
- Curved double pane thermal front glass
- “Low-E” double pane thermal glass inserts with plastic channel frames
- 12” long plastic handles on rear doors
- Foamed-in-place polyurethane insulation
- 18 cu. ft. interior
- (4) epoxy coated steel shelves
- Digital temperature controller
- 115V; 1/3 HP
- ETL listed. Conforms to UL STD. 471, Certified to CSA STD. C22. 2No.120
- Conforms to NSF/ANSI STD. 7.

### Construction

Exterior Material	Stainless top and front with painted sides
Interior Material	304 stainless steel
Insulation Material	Foamed-In-Place Polyurethane
Shelf Size	(4) epoxy coated steel
Load Capacity	90 lb.

### Dimensions

Exterior Dimensions	47-1/4"W x 32-1/2"D x 42-7/8"H
Interior Dimensions	43"W x 32"D x 26-3/4"H
Shipping Dimensions	52"W x 37D x 48-3/4"H
Net Volume	18 cu. ft.
Net Weight	320 lb.
Gross Weight	364 lb.




Parts & Labor


Compressor

### PLAN VIEW

Front View

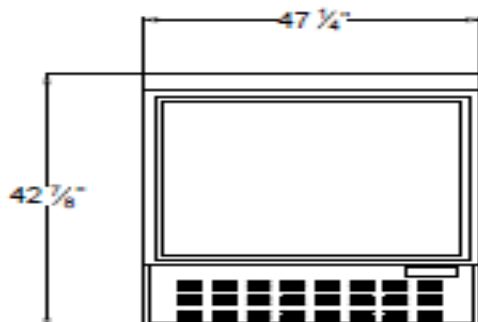

Side View



Top View

