



AFE424 - 400lb Flake Ice Machine

Self Contained Undercounter Flaker with Storage



Features and Benefits

- Improved design for higher reliability.
- Completely serviceable from the front side.
- Cabinet constructed of durable rust-free rotocast plastic.
- Delivers steady flow of ice for fast recovery of ice supply.
- 7ft. power cord for quick installation.
- 3 piece cabinet is easily removable from the front.
- Front air flow allows for placement in tight spaces.

AFE424 - 400lb Flake Ice Machine



Slide away access door provides convenient and easy access to ice.



24 Hour Volume Production

Air Cooled			Water Cooled		
70°F/21°C 50°F/10°C	Air Water	90°F/32°C 70°F/21°C	70°F/21°C 50°F/10°C	Air Water	90°F/32°C 70°F/21°C
395/180 lb/kg		250/113 lb/kg	395/180 lb/kg		300/136 lb/kg



Flake Ice



Cools more quickly than other ice forms. Ideal for seafood and produce displays.



Certification



Warranty


- 2 years parts and labor on all components.
- 5 years parts on the compressor.
- Warranty valid in North, South & Central America for commercial installations.
- Contact factory for warranty in other regions.



AFE424 - 400lb Flake Ice Machine

Self Contained Undercounter Flaker with Storage

AFE424 - 400lb Flake Ice Machine

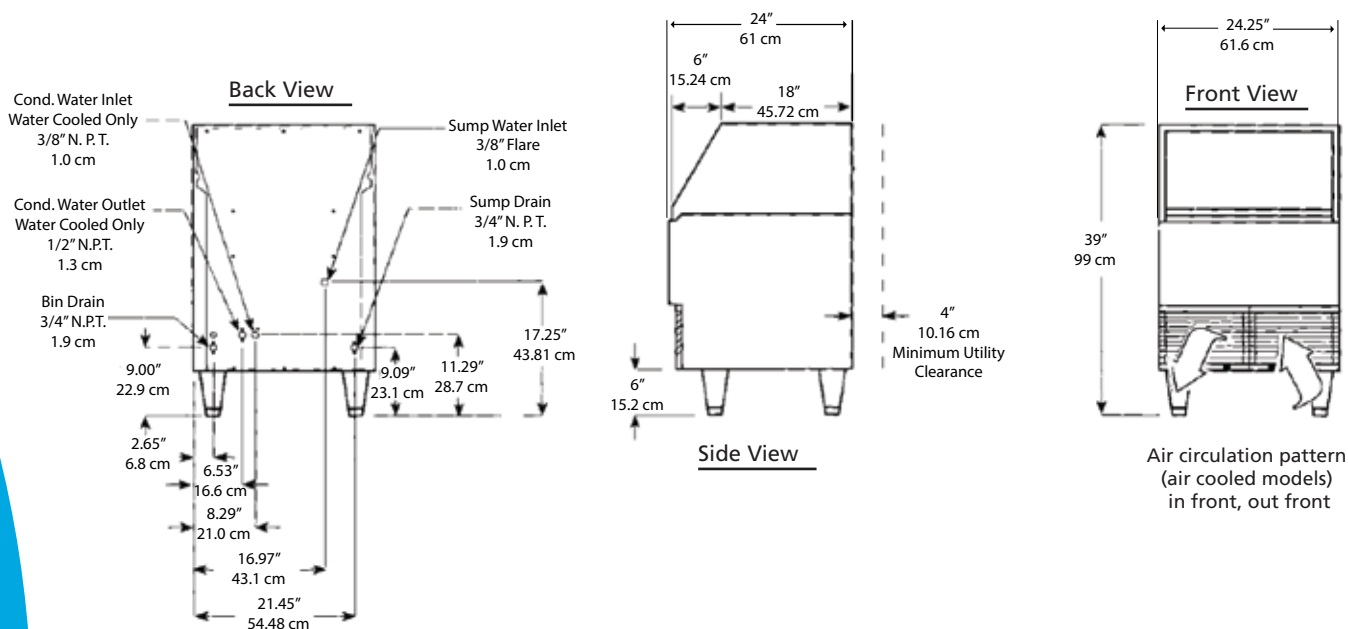

Specifications

Model Number	Condenser Unit	Storage Capacity lb/kg	Basic Electrical Volts/Hz/Phase	Max. Fuse Size or HACR Circuit Breaker (amps)	Circuit Wires	Min. Circuit Ampacity	Energy Consumption kWh/100 lb (45.4 kg) 90°F(32°C)/70°F(21°C)	Water Usage Gallons/100 lb (liters/45.4 kg)	
								Potable 90°F(32°C)/70°F(21°C)	Condenser 90°F(32°C)/70°F(21°C)
AFE424A-1	Air	80/36	115/60/1	15	2	Cord	6.0	12.0/45.5	-
AFE424W-1	Water	80/36	115/60/1	15	2	Cord	5.5	12.0/45.5	131.0/495.9



All Models

Dimensions (W x D x H):

Unit: 24.25" x 24" x 33"
(61.6 x 61.0 x 83.8 cm)

Shipping Carton: 27" x 27.5" x 38"
(68.6 x 69.9 x 96.5 cm)

Shipping Weight: 185lb / 84kg

BTUs per hour: 3,000

Refrigerant: R-134A



Accessories

Model Number	Description
KLP8S	Kit, Leg 6", Stainless Steel
KBC1	Kit, Casters



Operating Requirements

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (38°C)
Water Temperatures	40°F (4.4°C)	100°F (38°C)
Water Pressures	20 PSIG (1.4 bar)	80 PSIG (5.5 bar)
Electrical Voltage	-5%	+10%

Specifications and design are subject to change without notice.

Scotsman recommends all ice machines have water filtration. See Scotsman water filter specification sheet for details.