

Standard Features – Glass Door Refrigerator Model #AGM-53

- Two self-closing swing glass doors
- Interior LED lighting
- (8) epoxy-coated steel shelves included
- Foamed-in-place polyurethane insulation
- Bottom mount condensing unit
- Removable door gasket for easy cleaning
- Automatic defrosting
- Stainless steel floor
- Copper evaporator
- Black powder-coated steel exterior
- Eco-friendly R290 hydrocarbon refrigerant
- 5" Casters
- ETL listed. Conforms to UL STD. 471, Certified to CSA STD. C22. 2No.120
- Conforms to NSF/ANSI STD. 7

Construction

| | |
|---------------------|------------------------------|
| Exterior Material | Powder Coated |
| Interior Material | Cold Rolled Steel |
| Door Type | Glass Swing |
| Insulation Material | Foamed-In-Place Polyurethane |
| Shelf Size | (8) 24-3/8" x 23-5/8" |
| Shelf Material | Epoxy-Coated Steel |
| Shelf Load Capacity | 90 lbs. |

Dimensions

| | |
|---------------------|--------------------------------|
| Exterior Dimensions | 53-1/8"W x 31-7/8"D x 84-3/8"H |
| Interior Dimensions | 50"W x 28-1/8"D x 61-7/8"H |
| Shipping Dimensions | 54-1/2"W x 33"D x 84-1/2"H |
| Net Volume | 42.5 cu. ft. |
| Net Weight | 437 lbs. |
| Gross Weight | 480 lbs. |

Model #AGM-53

Cooling

| | |
|--------------------------|-----------|
| Temperature Range | 33°F-40°F |
| Refrigerant | R290 |
| Max. Ambient Temperature | 90°F |
| Defrosting | Automatic |
| Temperature Controller | Digital |
| Horsepower | 1/4 |

Electrical

| | |
|------------------------|------------|
| Voltage | 115 |
| Amps | 4.5 |
| Hz | 60 |
| Phase | 1 |
| Plug Type | NEMA-5-15P |
| Electrical Cord Length | 96" |




Parts & Labor


Compressor

PLAN VIEW

Front View

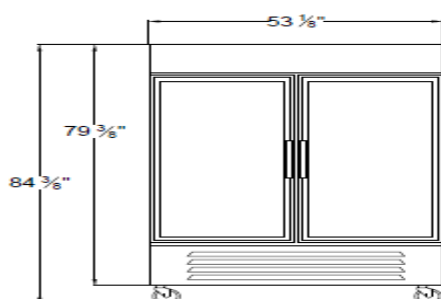

Side View



Top View

