



Model #AUC-72

Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/5

Electrical

Voltage	115
Amps	3.2
Hz	60
Phase	1
Plug Type	NEMA-5-15P
Electrical Cord Length	84"

Standard Features – Undercounter Refrigerator Model #AUC-72

- Environmentally-safe R290 refrigerant
- 430 series stainless steel exterior
- Painted aluminum interior
- Foamed-in-place polyurethane insulation
- (3) epoxy-coated shelf accommodates up to 90 lb.
- Environmentally-safe R290 refrigerant
- Temperature range of 33°F - 40°F
- Digital temperature controls
- (2) door with recessed handles
- 115V; 1/5 HP

Construction

Exterior Material	430 Stainless Steel
Interior Material	Painted aluminum
Insulation Material	Foamed-In-Place Polyurethane
Shelf	(2) 20-13/16" x 17-1/16" epoxy-coated steel holds up to 90 lb.
Shelf	(1) 17-1/16" x 23-1/2" epoxy-coated steel holds up to 90 lb.
Casters	(4) 4" casters for mobility


Dimensions

Exterior Dimensions	71-1/2"W x 29-1/2"D x 35-1/4"H
Interior Dimensions	56-5/8"W x 22-7/8"D x 23-1/2"H
Shipping Dimensions	64-1/4"W x 32-1/4"D x 38-1/2"H
Working Height	35-1/4"
Net Volume	14.2 cu. ft.
Net Weight	298 lb.
Gross Weight	370 lb.




PLAN VIEW

Front View

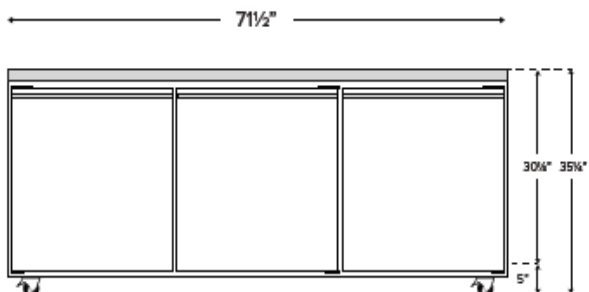

Side View



Top View

