

BLACK◆DIAMOND®

Project Name: _____

Location: _____

Item #: _____

Qty: _____

Black Diamond Full Size Gas Convection Oven, 5 Racks, in Stainless Steel

BDCOF-60/NG



Upgrade your commercial kitchen with this high-capacity Black Diamond Full Size Gas Convection Oven, engineered for performance and durability. Constructed with stainless steel and cast iron, it offers even heat distribution across its five racks. With a temperature range of 150° to 550°F, it accommodates various cooking needs. Manual ignition and control ensure reliable operation, while the stainless steel doors enhance durability. Cleaning is straightforward, making it a valuable asset for busy kitchens.

FEATURES AND CONSTRUCTION

- Constructed of high-quality stainless steel and cast iron materials
- Features a 120V power supply with a 120V US plug for convenience
- Equipped with 4 powerful burners for optimal cooking performance
- Offers a spacious cooking capacity with 5 racks and 10 position guides
- Designed with 19.7" long legs for enhanced stability
- Comes with a coupling adaptor and 3/4" rear NPT gas connection
- Manual ignition and manual control type for straightforward operation
- Operates within a temperature range of 150° to 550°F
- Double-pane thermal glass doors for excellent insulation
- Forced air, two-speed fan motor system for even heat distribution

3RD PARTY APPROVALS



Intertek



Intertek

WARRANTY (USA / CANADA)

Protected by Admiral Craft Equipment Corporation's one-year limited warranty.

Contact Admiral Craft Equipment
for details at 1-877-672-7740



INCLUDED COMPONENTS

- (4) Long Legs with Adjustable Feet
- (5) Full Size Racks


BLACK♦DIAMOND®

Black Diamond Full Size Gas Convection Oven

BDCOF-60/NG

FRONT

SIDE

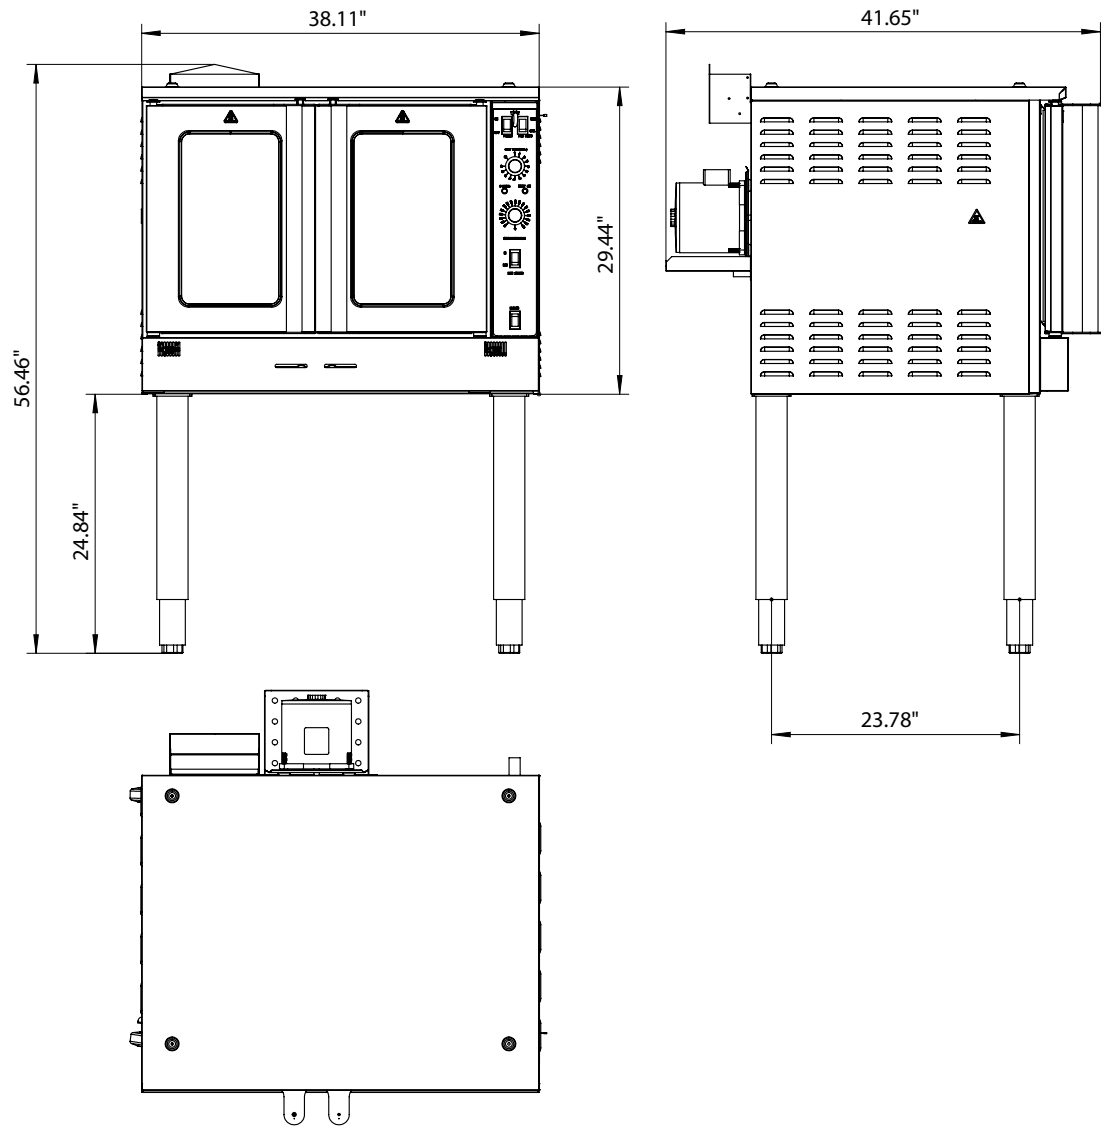

TOP

Gas

Control Type	Timer Included	Rack / Pan Size	Number of Racks	Number of Rack Positions	Assembled Dimensions (in)	Item Weight (lbs)	Shipping Weight (lbs)
Manual	Yes	Full Size	4	10	41.65" x 38.11" x 57.20"	507.0	568.9

ADDITIONAL INFORMATION

- Electricity not needed.
- Liquid Propane (LP) or Natural Gas (NG) units available. Field convertible from LP to NG and vice versa.
- Minimum supply pressure is 4" W.C. for natural gas and 10" W.C. for propane.
- Gas powered appliances must always be indoors, under an approved exhaust system with grease removal filters and a fire protection system.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.