

BLACK◆DIAMOND®

Project Name: _____

Location: _____

Item #: _____

Qty: _____

Black Diamond 36" Heavy Duty Thermostatic Gas Griddle, 3 Burners, in Stainless Steel

BDCTG-36T



Elevate your kitchen's efficiency with this 36-inch Black Diamond Thermostatic Gas Griddle, perfect for high-demand environments like diners and cafeterias. Built from stainless steel and cast iron, it ensures durability and even heat distribution. This commercial griddle features three burners, each producing 30,000 BTUs, and a temperature range of 200° to 450°F, ideal for cooking diverse dishes like pancakes and burgers. Manual ignition and control make it user-friendly, while the removable drip tray simplifies cleaning.

FEATURES AND CONSTRUCTION

- Constructed from stainless steel and cast iron for durability
- Delivers 90,000 BTUs for powerful cooking
- Equipped with 3 burners for efficient cooking
- Compact design fits perfectly in busy kitchens
- Equipped with 4 adjustable heavy-duty legs for stability
- Includes a 3/4" rear NPT gas connection and natural gas compatibility
- Manual ignition and control type for straightforward operation
- Temperature range from 200° to 450°F for versatile cooking
- Ideal for high-volume cooking in restaurants, cafeterias and diners
- Provides even heat distribution for consistent cooking results

3RD PARTY APPROVALS



Intertek



Intertek

WARRANTY (USA / CANADA)

Protected by Admiral Craft Equipment Corporation's one-year limited warranty.

Contact Admiral Craft Equipment
for details at 1-877-672-7740



INCLUDED COMPONENTS

- (4) Adjustable Legs
- (3) Gas Conversion Orifices
- (1) Relief Valve
- (1) Drip Tray


Black Diamond 36" Heavy Duty Thermostatic Gas Griddle, NG

BLACK♦DIAMOND®

BDCTG-36T

FRONT

SIDE

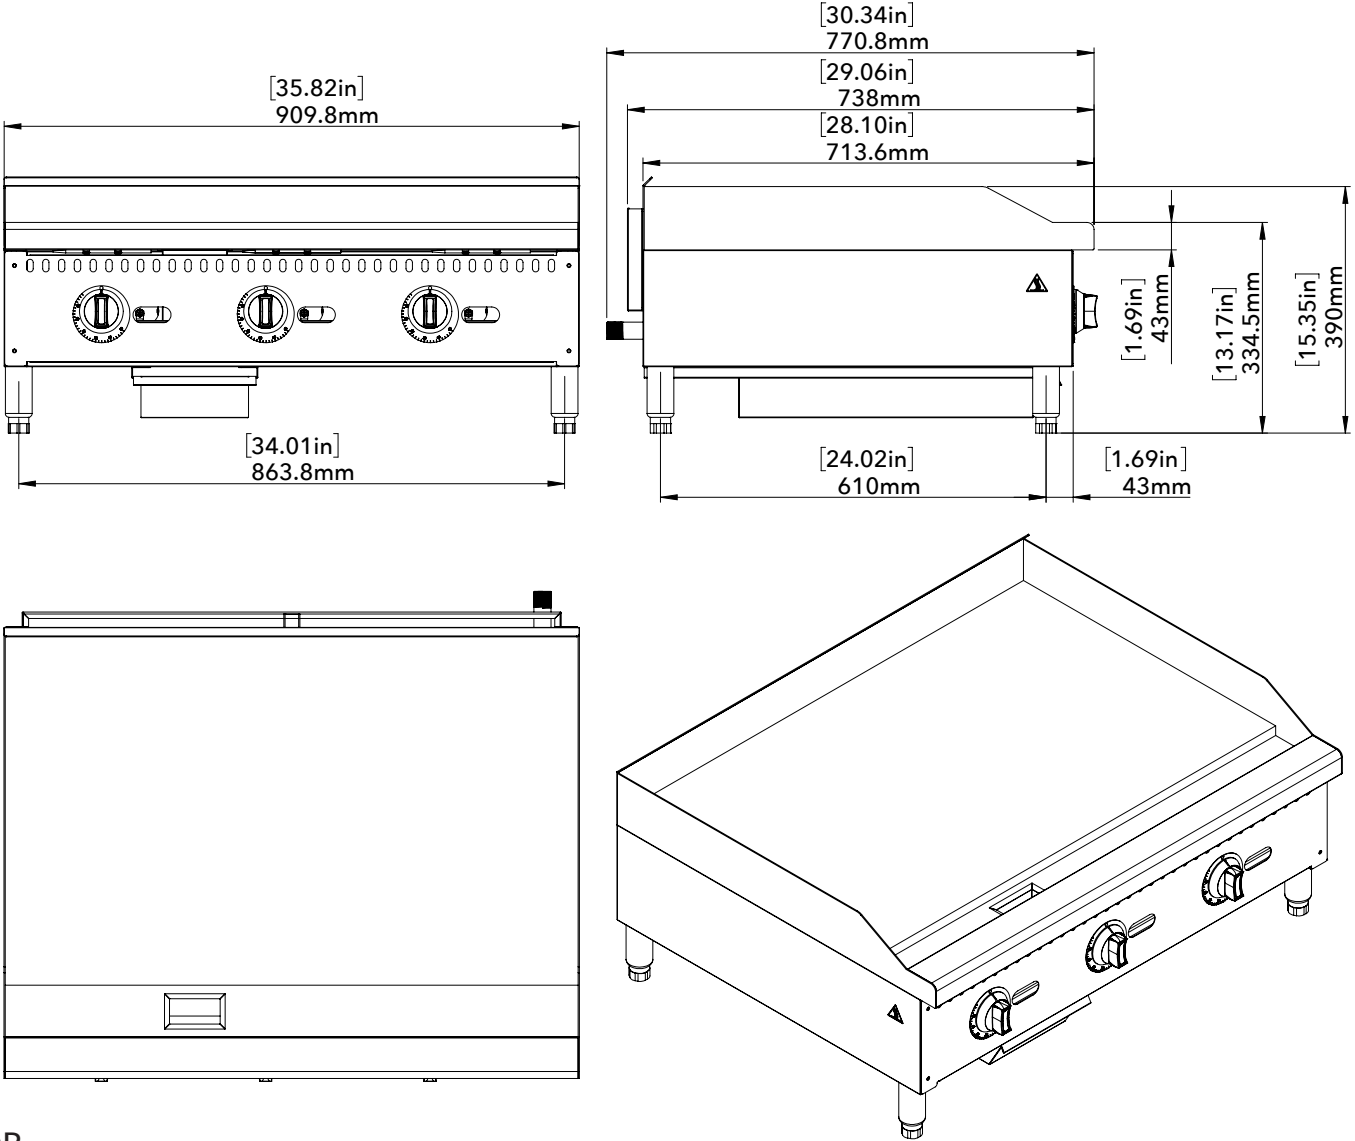

TOP

Gas

Ignition Type	Total BTU/hr	Total Number of Burners	Cooking Surface	Number of Drip Trays	Assembled Dimensions (in)	Item Weight (lbs)	Shipping Weight (lbs)
Manual	90000	3	Steel	1	29.06" x 35.82" x 13.17"	285.5	344.0

ADDITIONAL INFORMATION

- Electricity not needed.
- Liquid Propane (LP) or Natural Gas (NG) units available. Field convertible from LP to NG and vice versa.
- Minimum supply pressure is 4" W.C. for natural gas and 10" W.C. for propane.
- Gas powered appliances must always be indoors, under an approved exhaust system with grease removal filters and a fire protection system.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.