

# BLACK◆DIAMOND®

Project Name: \_\_\_\_\_

Location: \_\_\_\_\_

Item #: \_\_\_\_\_

Qty: \_\_\_\_\_

## Black Diamond 48" Heavy Duty Thermostatic Gas Griddle, 4 Burners, in Stainless Steel

**BDCTG-48T**




Elevate your kitchen's performance with the Black Diamond Thermostatic Gas Griddle, designed for high-volume use in restaurants and diners. Made from stainless steel and cast iron, it offers durability and even heat distribution. The 48-inch surface, powered by four burners, provides ample cooking space. Operating at a temperature range of 200° to 450°F, it ensures precision cooking. Manual ignition and controls make operation straightforward, while a removable drip tray simplifies cleaning.

### FEATURES AND CONSTRUCTION

- Constructed from stainless steel and cast iron for durability
- Delivers 120,000 BTUs for powerful cooking
- Equipped with 4 burners for efficient cooking
- Compact design fits perfectly in busy kitchens
- Equipped with 4 adjustable heavy-duty legs for stability
- Includes a 3/4" rear NPT gas connection and natural gas compatibility
- Manual ignition and control type for straightforward operation
- Temperature range from 200° to 450°F for versatile cooking
- Ideal for high-volume cooking in restaurants, cafeterias and diners
- Provides even heat distribution for consistent cooking results

### 3RD PARTY APPROVALS



### WARRANTY (USA / CANADA)

Protected by Admiral Craft Equipment Corporation's one-year limited warranty.

Contact Admiral Craft Equipment  
for details at 1-877-672-7740



### INCLUDED COMPONENTS

- (4) Adjustable Legs
- (4) Gas Conversion Orifices
- (1) Relief Valve
- (1) Drip Tray


BLACK◆DIAMOND®

Black Diamond 48" Heavy Duty Thermostatic Gas Griddle, NG

BDCTG-48T

FRONT

SIDE

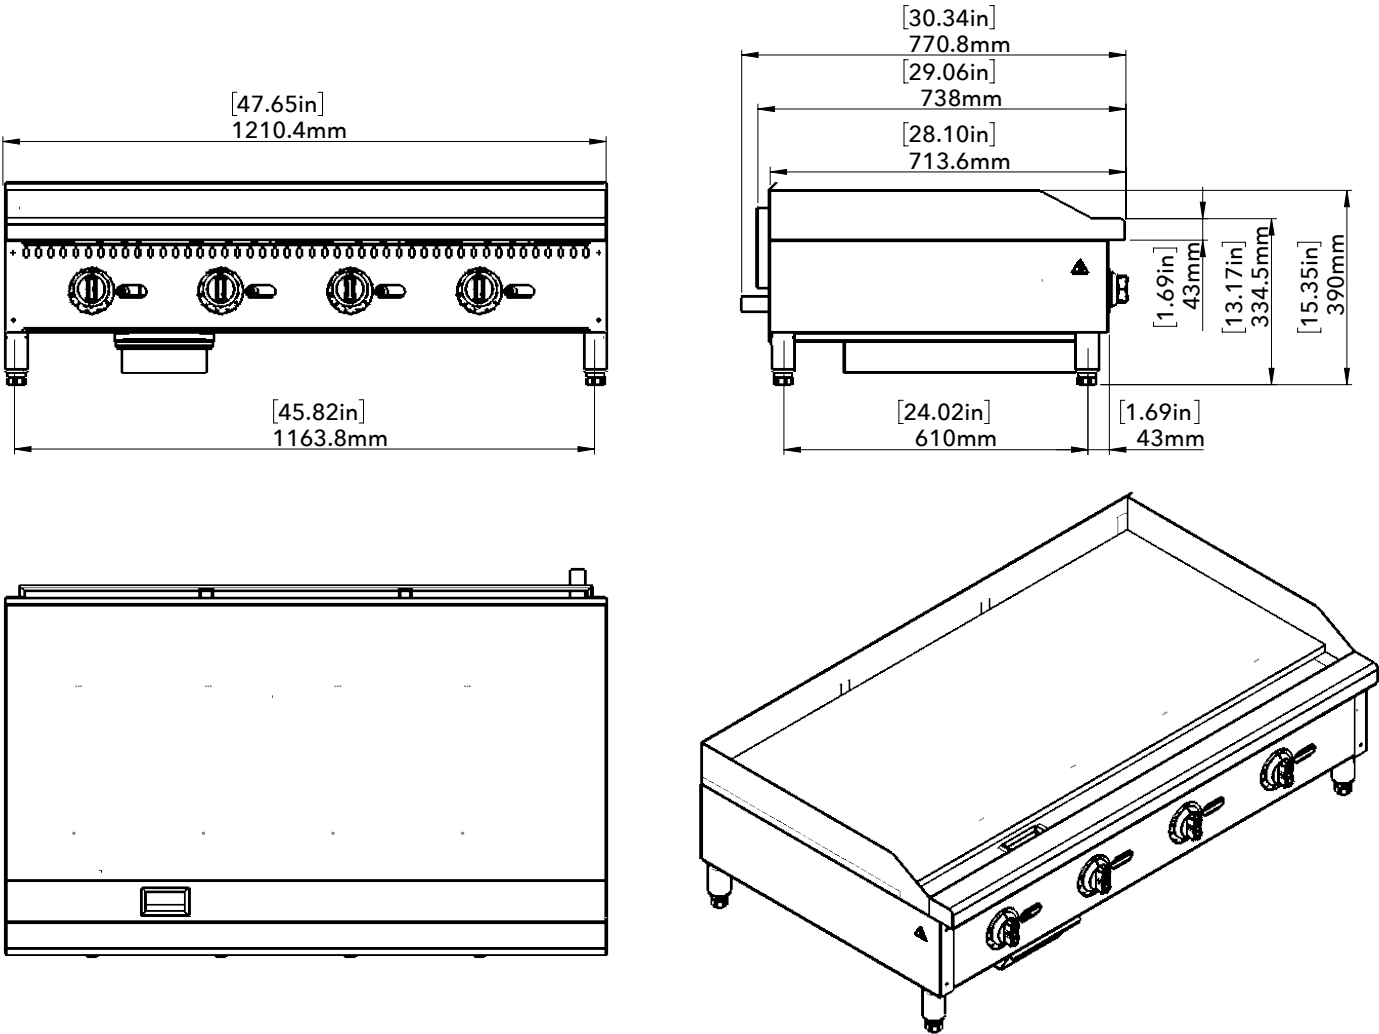

TOP

Gas

Ignition Type	Total BTU/hr	Total Number of Burners	Cooking Surface	Number of Drip Trays	Assembled Dimensions (in)	Item Weight (lbs)	Shipping Weight (lbs)
Manual	12000	4	Steel	1	29.06" x 47.65" x 13.17"	363.8	432.2

ADDITIONAL INFORMATION

- Electricity not needed.
- Liquid Propane (LP) or Natural Gas (NG) units available. Field convertible from LP to NG and vice versa.
- Minimum supply pressure is 4" W.C. for natural gas and 10" W.C. for propane.
- Gas powered appliances must always be indoors, under an approved exhaust system with grease removal filters and a fire protection system.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.