BLACK DIAMOND[®]

Project Na	me:
Location: _	
Item #:	
Otv.	

Black Diamond 60" Heavy Duty Thermostatic Gas Griddle, 5 Burner, in Stainless Steel

BDCTG-60T



Elevate your commercial kitchen with this powerful Black Diamond Thermostatic Gas Griddle, designed for reliability and efficiency in high-demand settings. Featuring a durable stainless steel and cast iron construction, it ensures longevity and consistent performance. With five burners, each delivering 30,000 BTUs, this griddle offers even heat distribution across its smooth steel plate. Manual ignition and controls provide precision, while the 200° to 450°F temperature range supports versatile cooking. Easy to clean with a removable drip tray and grease trough, it's perfect for restaurants, diners, and cafeterias.

FEATURES AND CONSTRUCTION

- Constructed from stainless steel and cast iron for durability
- Delivers 150,000 BTUs for powerful cooking
- Equipped with 5 burners for efficient cooking
- Compact design fits perfectly in busy kitchens
- Equipped with 4 adjustable heavy-duty legs for stability
- Includes a 3/4" rear NPT gas connection and natural gas compatibility
- Manual ignition and control type for straightforward operation
- Temperature range from 200° to 450°F for versatile cooking
- Ideal for high-volume cooking in restaurants, cafeterias and diners
- Provides even heat distribution for consistent cooking results

3RD PARTY APPROVALS



WARRANTY (USA / CANADA)

Protected by Admiral Craft Equipment Corporation's one-year limited warranty.





INCLUDED COMPONENTS


- (4) Adjustable Legs
- (5) Gas Conversion Orifices
- (1) Relief Valve
- (1) Drip Tray

Black Diamond 60" Heavy Duty Thermostatic Gas

BLACK+DIAMOND Griddle, NG

BDCTG-60T

FRONT

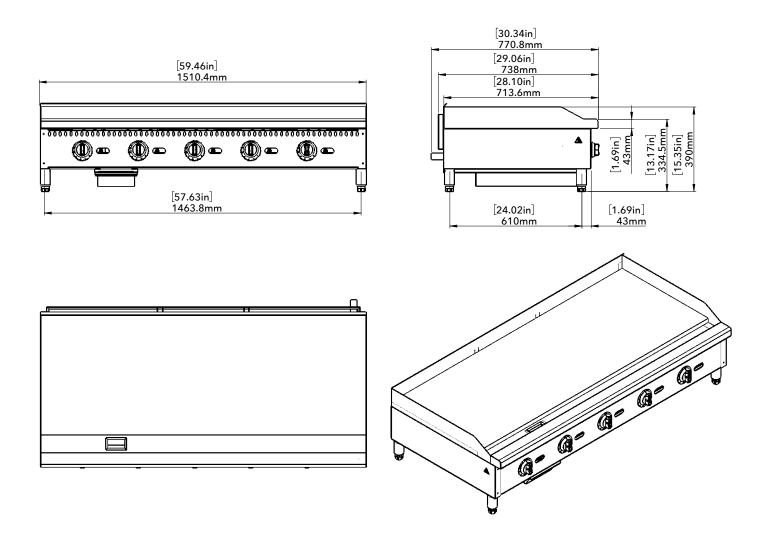

TOP

Gas

Ignition Type	Total BTU/hr	Total Number of Burners	Cooking Surface	Number of Drip Trays	Assembled Dimensions (in)	Item Weight (lbs)	Shipping Weight (lbs)
Manual	150000	5	Steel	1	29.06" x 59.46" x 13.17"	450.9	534.7

ADDITIONAL INFORMATION

- Electricity not needed.
- Liquid Propane (LP) or Natural Gas (NG) units available. Field convertible from LP to NG and vice versa.
- Minimum supply pressure is 4" W.C. for natural gas and 10" W.C. for propane.
- Gas powered appliances must always be indoors, under an approved exhaust system with grease removal filters and a fire protection system.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.