



Project Name: _____

Location: _____

Item #: _____

Qty: _____

Black Diamond Gas Deep Fryer, Liquid Propane, 70 lb, 150K BTU, in Stainless Steel

BDGF-150/LPG



(Unit shown with optional casters.)

FRYER ACCESSORIES (OPTIONAL)

- Stainless Steel Cover
- Joiner Strips
- Splash Guard
- Fryer baskets available in a variety of sizes

3RD PARTY APPROVALS



Intertek



Intertek

WARRANTY (USA / CANADA)

1 Year Warranty on Parts & Labor,
5 Year Warranty on Stainless Steel Fry Pot

Contact Admiral Craft Equipment
for details at 1-877-672-7740



This high-performance Black Diamond Gas Deep Fryer is perfect for commercial kitchens, offering reliability and efficiency for frying needs. Built from stainless steel and cast iron, it ensures durability and longevity. With a 70-pound capacity, it's ideal for high-volume frying tasks. The fryer maintains a temperature range of 200° to 400°F, powered by 150,000 BTUs for consistent heat. Manual ignition and control allow for precise operation, and its design ensures easy cleaning and maintenance.

FEATURES AND CONSTRUCTION

- Constructed with durable stainless steel and cast iron
- Delivers a powerful 150,000 BTUs for efficient frying
- Equipped with 5 burners for versatile cooking options
- Offers a 70 lb capacity for high-volume frying needs
- Equipped with adjustable legs for stability
- Designed for liquid propane with coupling adaptor and gas connection
- Features manual ignition and control for precision cooking
- Temperature range of 200° to 400°F for versatile cooking
- Designed for high-volume commercial kitchen environments
- Perfect for frying a variety of foods like french fries and chicken wings

INCLUDED COMPONENTS

- (4) Adjustable Legs
- (4) Casters
- (2) Baskets
- (1) Basket Support Rack
- (1) Basket Hanging Plate
- (1) Oil Drainage Extension Pipe

TEMPERATURE

Overall Temperature (Fahrenheit):



- Minimum: 200° - Maximum: 400°F

Black Diamond Gas Deep Fryer, LPG, 70 lb,



BLACK DIAMOND® 150K BTU

BDGF-150/LPG

FRONT

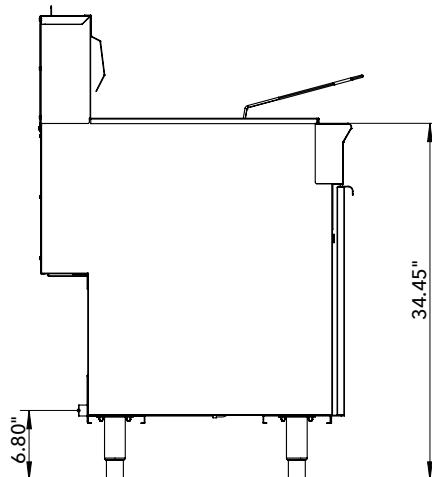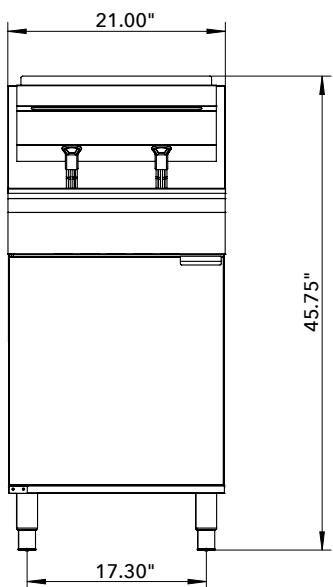

SIDE

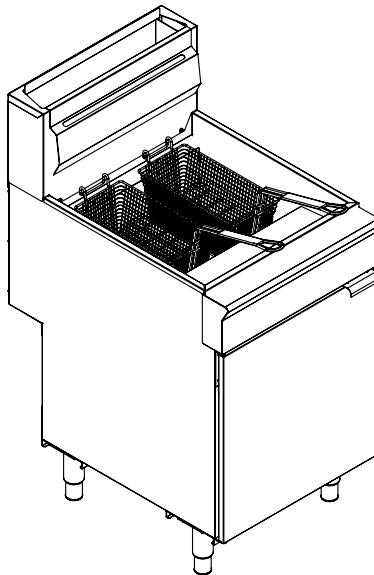

TOP

Gas

Capacity (lbs. of oil)	Temperature Range (Fahrenheit)	BTU / Hour	Assembled Dimensions (in)	Item Weight (lbs)	Shipping Weight (lbs)
70 lbs	200° - 400°	150000	30.12" x 21.00" x 45.75"	165.4	205.1

ADDITIONAL INFORMATION

- Electricity not needed.
- Liquid Propane (LP) or Natural Gas (NG) units available. Field convertible from LP to NG and vice versa.
- Minimum supply pressure is 4" W.C. for natural gas and 10" W.C. for propane.
- Gas powered appliances must always be indoors, under an approved exhaust system with grease removal filters and a fire protection system.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.