

**BLACK DIAMOND®**

## Black Diamond 60" Gas Range, 10 Burners, in Stainless Steel

**BDGR-60/NG**



### 3RD PARTY APPROVALS



Intertek



Intertek

### WARRANTY (USA / CANADA)

Protected by Admiral Craft Equipment Corporation's one-year limited warranty.

Contact Admiral Craft Equipment for details at 1-877-672-7740



Project Name: \_\_\_\_\_

Location: \_\_\_\_\_

Item #: \_\_\_\_\_

Qty: \_\_\_\_\_

Achieve exceptional cooking results with this 60-inch commercial Black Diamond Gas Range, tailored for demanding restaurant environments. Built with stainless steel and cast iron, it ensures durability and longevity. Featuring 10 powerful gas burners, it delivers a total of 360,000 BTUs, suitable for high-volume cooking. The manual ignition and control type offer precise heat management, while the removable grates and crumb tray simplify cleaning and maintenance, making it a kitchen essential.

### FEATURES AND CONSTRUCTION

- Made from high-quality stainless steel and cast iron
- Features a powerful 360,000 BTUs output
- Equipped with 10 burners for versatile cooking
- Designed with a 10 burner capacity for high-volume cooking
- Sturdy construction with adjustable legs for stability
- Comes with a 3/4 rear NPT gas connection, suitable for natural gas
- Manual ignition and control type for straightforward operation
- Temperature range of 250° to 550°F for versatile cooking
- Removable crumb tray for easy maintenance


### INCLUDED COMPONENTS

- (1) Relief Valve
- (12) Gas Conversion Orifices
- (19) Screws
- (2) Gas Conversion Pilot Orifices
- (1) Rear Backplate Assembly
- Casters




# BLACK DIAMOND® Black Diamond 60" Gas Range, 10 Burners, NG

BDGR-60/NG

FRONT

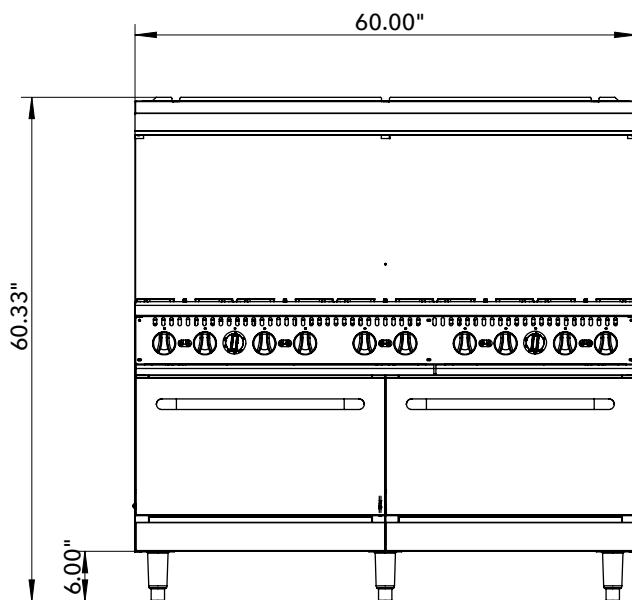

SIDE

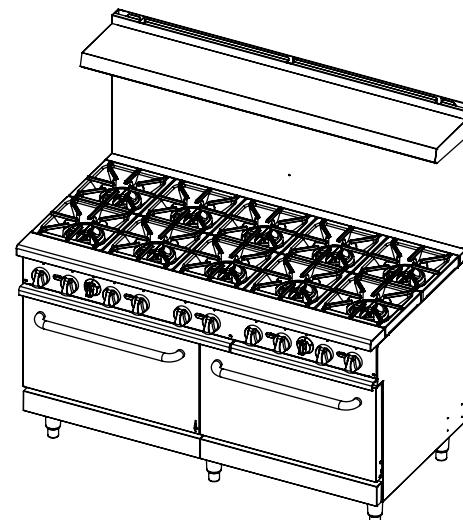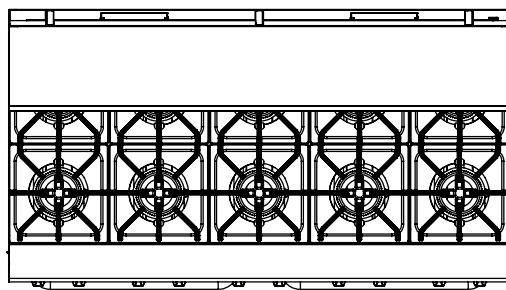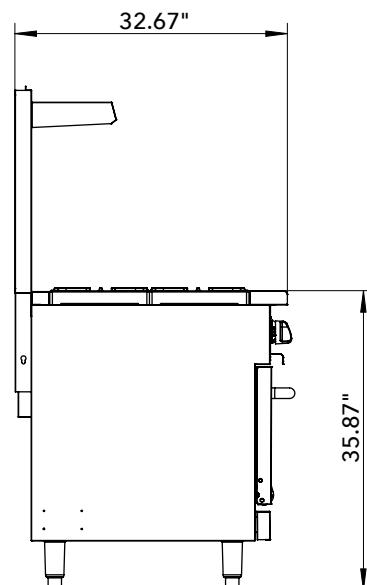

TOP

Gas

Total BTU/hr	Number of Burners	Number of Ovens	Crumb Trays	Assembled Dimensions (in)	Item Weight (lbs)	Shipping Weight (lbs)
360000	10	2	2	32.67" x 60.00" x 60.33"	640.6	767.3

## ADDITIONAL INFORMATION

- Electricity not needed.
- Liquid Propane (LP) or Natural Gas (NG) units available. Field convertible from LP to NG and vice versa.
- Minimum supply pressure is 4" W.C. for natural gas and 10" W.C. for propane.
- Gas powered appliances must always be indoors, under an approved exhaust system with grease removal filters and a fire protection system.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.