



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

Undercounter Refrigerators

Standard Features

- Stainless steel exterior & interior
- Field reversible door(s)
- Environmentally friendly R290 refrigerant
- Electronic temperature controller
- Maintains temperatures between 35°F – 38°F
- Self-closing door(s) with stay open feature
- Magnetic door gasket(s) standard for positive door seal
- Pre-installed casters
- One (1) pre-installed shelf per section

Optional Accessories

- Field installable drawer cartridges
- Extended warranty up to 5 years

For the best results of food preservation we recommend setting your refrigerator between 35 °F to 38 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.



2 YEAR PARTS AND LABOR WARRANTY
5 YEAR COMPRESSOR PART WARRANTY

MODELS:

AUR24SD / AUR27SD / AUR36SD / AUR48SD
AUR60SD / AUR72SD



AUR24SD



AUR27SD



AUR36SD



AUR48SD



AUR60SD



AUR72SD





"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com


California, Colorado, Florida, Georgia, Illinois,

New Jersey, Ohio, Texas, Washington

SPECIFICATIONS

Models	Door	Capacity (Cu.Ft.)	Shelves	Casters (inch)	Rated Current (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lb)	Gross Weight (lb)
AUR24SD	1	3.7	2	2	2.4	115/60/1	1/7	R290	23 ^{7/8} ×26×32 ^{1/2}	108	138
AUR27SD	1	6.4	1	2	2.3	115/60/1	1/6	R290	27 ^{1/2} ×30×32 ^{1/2}	137	168
AUR36SD	2	8.6	2	2	2.3	115/60/1	1/6	R290	36 ^{3/8} ×30×32 ^{1/2}	161	198
AUR48SD	2	11.8	2	2	2.3	115/60/1	1/6	R290	48 ^{1/4} ×30×32 ^{1/2}	182	249
AUR60SD	2	15	2	2	2.8	115/60/1	1/5	R290	60 ^{1/4} ×30×32 ^{1/2}	218	287
AUR72SD	3	18.2	3	2	2.8	115/60/1	1/5	R290	72 ^{5/8} ×30×32 ^{1/2}	254	335

PLAN VIEW

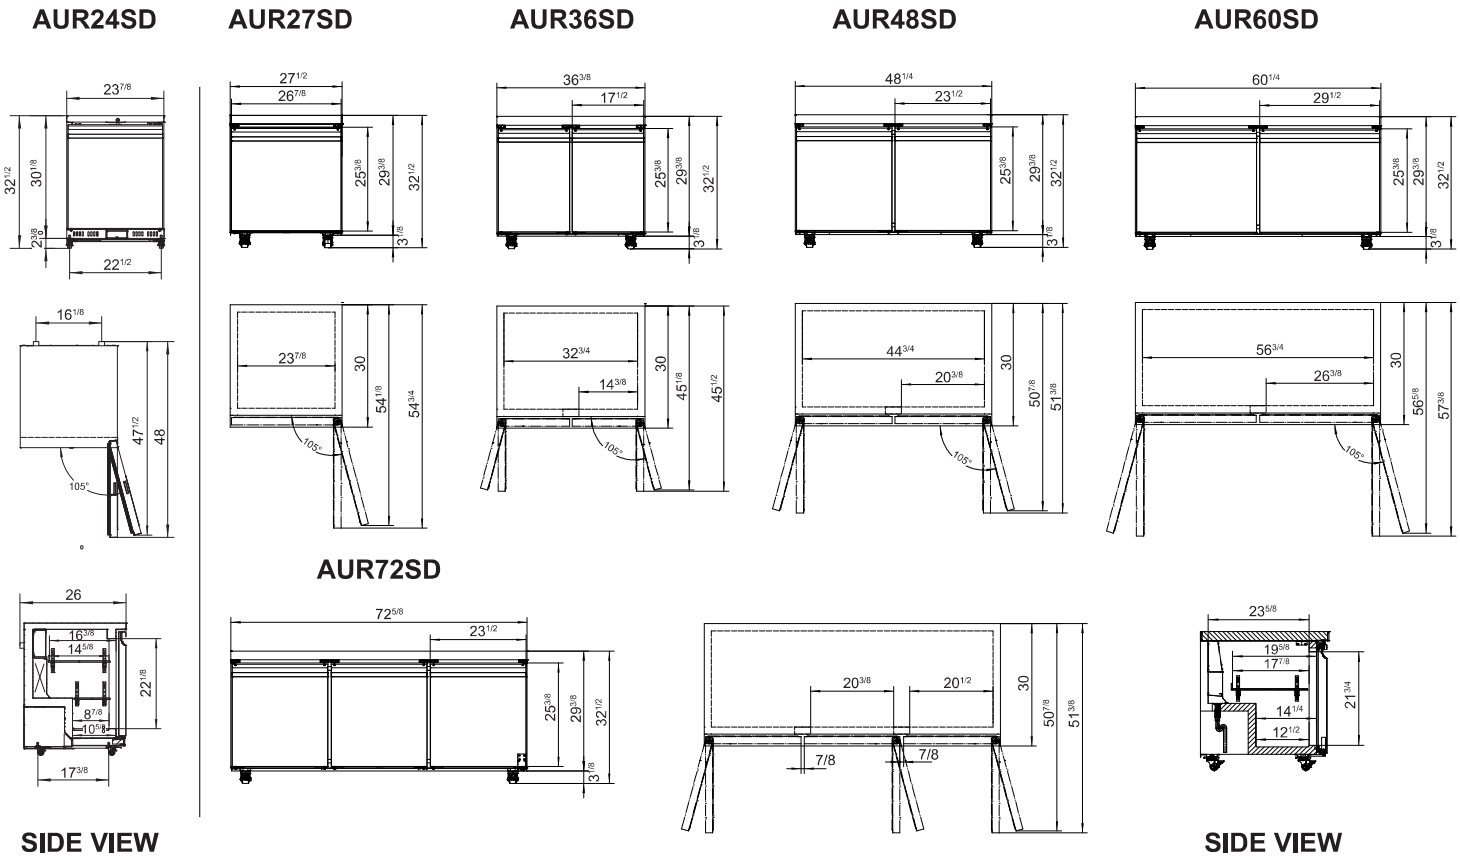

Casters

Epoxy shelves

Rear grate

Temperature control

