

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

## **GF BAR EQUIPMENT**

GF34L Glass and Plate Froster

MODEL: GF34L-B GF34L-S



GF34L-B



GF34L-S

#### **OPTIONS & ACCESSORIES**

- Stainless steel interior
- Locks
- 3" 6" Casters
- 6" Adjustable legs with plate
- Horizontal mount thermometer
- Dial thermometer
- Remote option

# 3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty

#### **CABINET CONSTRUCTION**

- Exterior is available in wear resistant vinyl on steel in black Finish or stainless steel finish
- Standard interior construction utilizes galvanized steel
- Top includes easy glide, stainless steel lids and stainless steel counter top with edge
- Two shelves and bottom rack standard
- Two (2) shelf ledges standard with three (3) mounting points
- Chills glasses and plates at -10°F
- Flexibility in design provides for plate storage and chilling
- · Automatic defrost of coil is standard
- Built-in condensate evaporator system
- No floor drain or additional plumbing is needed

#### **REFRIGERATION SYSTEM**

- Refrigeration system uses R404A refrigerant to comply with all environmental concerns
- Automatic, electric defrost
- Epoxy coated evaporator coil


















MODEL	GF34L-B	GF34L-S
EXTERNAL DIMENSIONAL DATA		
Width Overall	34"	34"
Depth Overall	26 1/8"	26 1/8"
Height Overall	33 5/8"	33 5/8"
Number or Lids	1	1
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	6.6	6.6
Internal Width Overall (in)	29 7/8"	29 7/8"
Internal Depth Overall (in)	22"	22"
Internal Depth Useable (in)	17 1/2"	17 1/2"
Internal Height Overall (in)	18 1/4"	18 1/4"
Number of Dividers	2	2
Number of 12 oz. Mugs	94	94
Number of 8" Plates	150	150
ELECTRICAL DATA		
Full Load Amperes 115/60/1	6.5	6.5
REFRIGERATION DATA		
Horsepower	1/2	1/2
Capacity (BTU/Hr)*	1132	1131
WEIGHT DATA		
Gross Weight (Crated lbs)	223 lbs	223 lbs
Height - Crated	39"	39"
Width - Crated	37 1/2"	37 1/2"
Depth - Crated	29"	29"

# **Bar Equipment - Glass Frosters**

Models: GF34L-B, GF34L-S

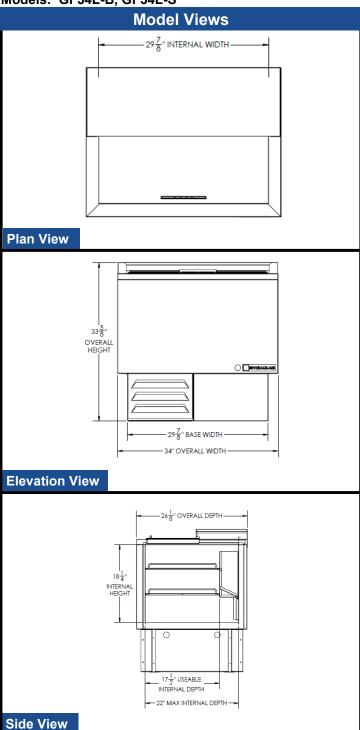

### **ELECTRICAL CONNECTION**















Units pre-wired at factory and include 8' long cord and plug set.

