

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

VM OPEN AIR-MERCHANDISER

VM18 Open Air-Merchandiser

MODEL: VM18-1-B-LED VM18-1-G-LED VM18-1-W-LED



VM18-1-B-LED



VM18-1-W-LED

OPTIONS & ACCESSORIES

- ☐ 5" Casters
- ☐ Bar/Bag hook
- ☐ Front Product display
- Side product display
- Lockable security cage

3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty

CABINET CONSTRUCTION

- Exterior is power coated galvanized metal available in black, grey or white
- Interior is painted steel for easy cleaning
- Electronic temperature control
- LowE double pane glass tempered thermal sides
- Foamed in place CFC free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency
- Shelves included can be installed in 2 position for display flexibility
- Tag molding
- 6" adjustable legs
- Night curtain comes standard and helps save energy and maintain cabinet temperature.
- Operating temperature 36°F 40°F
- Intended for use in rooms having ambient condition or 75°F/55% humidity
- LED lighting standard

REFRIGERATION SYSTEM

- Refrigerant is R134A
- Maintenance free condenser slides out for easy service
- Automatic defrost












MODEL VM18 **EXTERNAL DIMENSIONAL DATA** Width Overall 51 1/2" Depth Overall 31 2/3" Height Overall 78 4/5" INTERNAL DIMENSIONAL DATA NET Capacity (cubic ft.) 23.87 Number of Shelves 5 **ELECTRICAL DATA** Full Load Amperes 120/60/1 16 **REFRIGERATION DATA** Horsepower 2x 1/3 **Energy Consumption** 18.5 kw-hr/day **WEIGHT DATA** Gross Weight (Crated lbs) 652 lbs Height - Crated 82 5/7" Width - Crated 56 2/7" Depth - Crated 36 2/7"

Open Air-Merchandiser

Models: VM18-1-B-LED, VM18-1-G-LED, VM18-1-W-LED

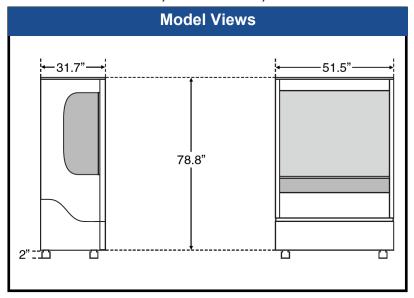

Front Display



Side Display



Security Cage



ELECTRICAL CONNECTION







Units pre-wired at factory and include 8' long cord and plug set.

