

HOLMAN 2 & 4 SLICE POP-UP TOASTERS Models T2, T4, BT4, CT4

Features/Benefits:

- ★ Holman's Pop-Up Toasters will toast your bagels, breads, buns or a variety of other bread products to perfection.
- ★ Available in 2 & 4 slice designs to accommodate any volume foodservice operation.
- ★ Solid state timer control(s) for consistent toasting cycles.
- ★ Insulated ceramic heating elements provide uniform heat and even toasting.
- ★ Extra wide 1-1/8" slots for toasting bagels or Texas toast.
- ★ Operating lever and color selection knob to meet all of your customers tastes.
- ★ Removable crumb tray for easy cleaning.
- ★ Production ranges from 150 slices per hour for two slice toasters and 250 slices per hour for four slice toasters.
- ★ Each toasting chamber is equipped with oven guide wires and lowering rack.

Applications:

Commercial electronic pop-up toasters are designed to uniformly toast bread, frozen waffles, bagels, buns and many other foods consistently.

Quality Construction:

Holman's 2 and 4 slice toasters feature stainless steel body, insulated ceramic etched foil heaters and pullout crumb tray. Dual thermostats and adjustable color control for each bank of two slot openings. Toasters come complete with 3' lead in cord and molded plug.

Warranty:

Holman's Pop-Up Toasters are covered by a one year parts and labor warranty.



Model T2



Model CT4






 Star Manufacturing International Inc. - 10 Sunnen Drive - P.O. Box 430129 - St. Louis, MO 63143-3800

 Phone: (800) 264-7827 - FAX: (800) 264-6666 - www.star-mfg.com
 H310/0098



HOLMAN[®] 2 & 4 SLICE POP-UP TOASTERS Models T2, T4, BT4, CT4

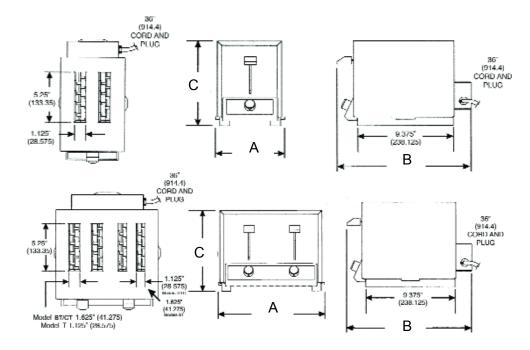

Model Specifications

Model No.	Description	Din A Width Inches (cm)	nensions B Depth Inches (cm)	C Height Inches (cm)	NEMA	Voltage	Wattage	Amps	Approxima Shipping Ibs. (kg)	te Weight Installed Ibs. (kg)
T2	Two Slot Toaster	6-5/8 (16.8)	13-3/8 (34)	9-3/16 (23.3)	5-15P 6-15P	120 208/240 -	1,100 1,000/1,300	9.0 4.8/5.4	12.3 (5.6)	9.0 (4.1)
T4	Four Slot Toaster	11-7/16 (29.1)	13-3/8 (34)	9-3/16 (23.3)	5-20P* 6-15P 6-20P	120 208/240 2 208V	2,200 2,000/2,600 2,600	18.3 9.6/10.8 12.5	21 (9.5)	16.5 (7.5)
BT4	Four Slot Toaster	11-7/16 (29.1)	13-3/8 (34)	9-3/16 (23.3)	5-20P 6-15P	120 208/240 ⁻	1,800 1,400/1,800	15.0 6.7/7.5	21 (9.5)	16.5 (7.5)
CT4	Four Slot Combo Toaster	11-7/16 (29.1)	3 13-3/8 (34)	9-3/16 (23.3)	5-20P* 6-15P	120 208/240 ⁻	2,000 1,700/2,200	16.6 9.2	21 (9.5)	16.5 (7.5)

*Not approved for Canada

Typical Specifications

Holman's Pop-Up Toasters have a polished stainless steel body with 2 or 4 slot openings from 1-1/8" wide and 5-1/4" long. A large removable crumb tray is standard. Toasters have an adjustable color control knob coupled with a voltage and temperature compensating electronic control for each bank of 2 slot openings. Insulated ceramic etched foil heaters installed on both sides of chamber (one side for bagel toasters). Toasters come complete with a 3 foot lead in cord with molded plug (NEMA #5-15P on 2 slot 120V, 5-20P on 4 slot 120V, 6-15P on T4, BT4 and CT4 208/240 and 6-20P on T4 208V). Toasters have been tested by ETL in accordance to UL and CSA standards. ETL listed to NSF standard 4. Printed in the U.S.A.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Star Manufacturing exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

Star Manufacturing International Inc. - 10 Sunnen Drive - P.O. Box 430129 - St. Louis, MO 63143-3800 Phone: (800) 264-7827 - FAX: (800) 264-6666 - www.star-mfg.com