

**PACKAGING****Berkel****250**  
VACUUM PACKAGING MACHINE

Model 250

**FEATURES**

Berkel Model 250 is a reliable tabletop vacuum package machine designed to meet most foodservice portion control and product storage needs. The unit offers a spacious stainless steel chamber, high quality pump and single 12½" seal bar providing a high integrity double seal. The unit is simple to operate and maintain.

- 250** Vacuum Packaging Machine

**STANDARD FEATURES**

- Tabletop model with a stainless steel housing and 15" (381 mm) x 14" (356 mm) x 4" (102 mm) single chamber.
- Single 12½" (318 mm) seal bar provides high integrity double sealing.
- High quality 6 m<sup>3</sup>/h Busch pump and vacuum dial gauge.
- 1-speed, ½ HP, totally enclosed, permanently lubricated ball bearings, thermally protected.
- Furnished in 115/60/1, 6.5 amp, AC.
- Vacuum intervals of 1 to 99 seconds.
- Simple to operate electronic, touch pad controls with nine storable programs.
- Attached 6-foot, flexible, 3-wire cord and plug for grounded receptacle.

**OPTIONS**

- Liquid control system

**Berkel** a division of ITW Food Equipment Group LLC

P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602



**250**  
VACUUM PACKAGING MACHINE

**SPECIFICATIONS**

**Finish/Construction:** Tabletop model with stainless steel housing and chamber.

**Pump:** High quality 6 m<sup>3</sup>/h Busch pump and vacuum dial gauge.

**Electrical:** Furnished in 115/60/1, 6.5 amp, AC.

**Vacuum Chamber:** Single, stainless steel 15" (381 mm) x 14" (356 mm) x 4" (102 mm) chamber; vacuum intervals of 1 to 99 seconds.


**Seal Bar(s):** Single, 12½" (318 mm) seal bar provides high integrity double sealing.

**Controls:** Simple to operate electronic, touch pad controls.

**Motor:** 1-speed, ½ HP, totally enclosed permanently lubricated ball bearings, thermally protected.

**Cord and Plug:** Attached 6-foot, flexible, 3-wire cord and plug for grounded receptacle.

**Warranty:** All parts, service and travel coverage for one year, excluding wear items.

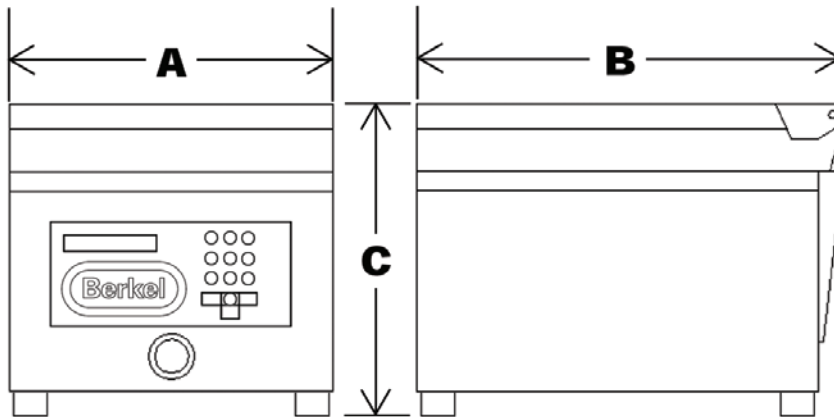

| MODEL NUMBER | CHAMBER SIZE    |                 |                | SEAL BAR | SEAL BAR LENGTH  | PRODUCT DIMENSIONS |                 |                  |
|--------------|-----------------|-----------------|----------------|----------|------------------|--------------------|-----------------|------------------|
|              | WIDTH           | DEPTH           | HEIGHT         |          |                  | WIDTH A            | DEPTH B         | HEIGHT C         |
| 250          | 15"<br>(381 mm) | 14"<br>(356 mm) | 4"<br>(102 mm) | 1        | 12½"<br>(318 mm) | 16½"<br>(419 mm)   | 21"<br>(533 mm) | 18½"<br>(394 mm) |

| MODEL NUMBER | PUMP<br>m <sup>3</sup> /h | ELECTRICAL | WEIGHT  | BOX DIMENSIONS  |                 |                 |
|--------------|---------------------------|------------|---|-----------------|-----------------|-----------------|
|              |                           |            |   | WIDTH           | DEPTH           | HEIGHT          |
| 250          | 6                         | 115/60/1   | Net 158 lbs. (72 kg)<br>Ship 218 lbs. (99 kg) | 29"<br>(737 mm) | 22"<br>(559 mm) | 27"<br>(610 mm) |



P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602