

PROJECT:		
ITEM#		QTY:
MODEL# _		
AIA #	SIS #	
APPROVED:		

BAR EQUIPMENT - BACK BAR REFRIGERATOR

Model: BBN72HC-GS-S

SHALLOW DEPTH / SLIDING GLASS DOORS



7 YEAR WARRANTY Parts, Labor, and Compressor

CABINET CONSTRUCTION

- · Stainless steel exterior
- Interior construction utilizes galvanized steel on walls and ceiling, heavy duty stainless steel floor
- · Full electronic control
- · 1" Stainless steel top standard
- ADA compliance (standard height)
- Self-closing sliding glass doors have black frame regardless of finish
- · Door gaskets provide positive door sealing
- · Stay-open feature and locks standard
- LED lighting
- Packaged products only
- Six (6) epoxy coated wire shelves
- Compressor standard on left side
- Balanced, forced air refrigeration system provides rapid chilling of product



OPTIONS & ACCESSORIES


- Right side compressor location (-ALT) (specify at time of unit order)
- · Stainless steel back
- Wine model (40°-60° models)
- · Wire shelf divider
- · Additional shelves
- · Additional shelf clips
- · 3" or 6" Casters
- · 6" Black legs
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- · Epoxy coated evaporator coil
- Maintains product temperature between 36°F and 38°F

BEVERAGE-AIR.

Back Bar Refrigerator Model: BBN72HC-GS-S

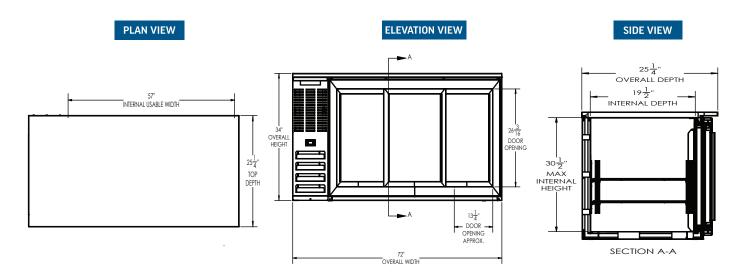

HEIGHT OPTIONS		
OPTIONS	HEIGHT	
Standard Floor Mount	34"	
3" Casters	37"	
6" Casters	40"	

EXTERNAL DIMENSIONAL DATA			
Width Overall (in)	72"		
Depth Overall (in)	25 1/4"		
Height Overall (in)	34"		
Number of Doors	3		
Door Openings (in)	13 1/4" x 26 3/16"		
INTERNAL DIMENSIONAL DATA			
NET Capacity (cubic ft).	19.618		
Internal Width Useable (in)	57"		
Internal Depth Overall (in)	19 1/2"		
Internal Height Overall (in)	30 1/2"		
Number of Shelves	6		
Number of 1/2 Kegs	3		

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without $% \left(1\right) =\left(1\right) \left(1\right) \left$ notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

ELECTRICAL DATA				
Full Load Amps	3.3			
Voltage	115/60/1			
Nema Plug (8' cord)	5-15P			
REFRIGERATION DATA				
Horsepower	1/3			
Capacity (BTU/Hr)	1942			
Heat Rejection (BTU/Hr)	2913			
Charge (lbs/grams/ounces)	0.2535 / 115 / 4.05			
SHIPPING DATA				
Gross Weight - Crated	398 lbs.			
Height - Crated (in)	42 3/16"			
Width - Crated (in)	74 3/4"			
Depth - Crated (in)	36 1/2"			

ELECTRICAL CONNECTION



115/60/1

Unit pre-wired at factory NEMA 5-15P and include 8' long cord and plug set.

3779 Champion Blvd., Winston-Salem, NC 27105 | 888-845-9800 | Fax: 336-245-6453 | Beverage-Air.com | Sales@bevair.com

Date Issued 8/25 | Printed in U.S.A.

