




Brema Ice Machines add a touch of elegance to your establishment. Known and trusted in the industry for high-quality construction and consistent production, they are the most reliable choice for all your ice production needs.

## Ice Cube



Brema Ice Cube Machines are perfect for bars, restaurants, hotels and clubs for clients who require ice cubes with elegant form and clear, crystalline finish. Only the purest of water forms ice as it's sprayed onto a horizontal evaporator, while the mineral rich water returns to the internal tank and is subsequently removed at the end of each production cycle.



Compact, Crystal Ice

## Standard Features



Adjustable stainless steel feet



Air cooling system



Easy cleanable internal rounded surfaces



HCFC-Free insulated storage



RoHS Free



Retractable insulated door



Electromechanical operation



ON/OFF switch



HFC Free  
HC R290 Refrigerant Gas



**NEW**  
Automatic washing system



### Brema Ice Machine Cleaner

For use with Brema Ice Machines to completely descale and clean interior and exterior surfaces and components. Colorless and odorless, powdered agent. Sold separately.

**NEW** Self-Cleaning feature, **AWS: Automatic Washing System.**

In 1.5 hours, your machine will be completely descaled and cleaned. Recommended use with Brema Ice Cleaner\*.

\*Sold separately.

## CB Series



CB249A HC USA



CB316A HC USA




CB425A HC USA



CB640A HC USA



CB674A HC USA

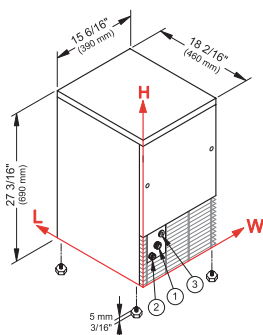

Adjustable feet 3/16"

- ① WATER IN: 4 6/16" – 6 14/16" – 3/4"
- ② WATER OUT: 1 15/16" – 5 2/16" – 15/16"
- ③ ELECTRICAL CONNECTIONS: 6 2/16" – 8 5/16"

## CB249A HC USA

115V, 320W, 3A
13 g
79 lbs
61 lbs
20 lbs
18" x 15.5" x 27"
82 lbs
34.5" x 17.25" x 20.5"
97 lbs

### Power

### Cube Size

Production/24h\*

Production/24h\*\*

### Bin Capacity


Dimensions (L x W x H)

### Net weight

Ship Dim. (L x W x H)


### Ship weight

## CB316A HC USA



Adjustable feet 4 5/16" – 5 14/16"

- ① WATER IN: 4 6/16" – 7 11/16" – 3/4"
- ② WATER OUT: 1 15/16" – 5 15/16" – 15/16"
- ③ ELECTRICAL CONNECTIONS: 6 2/16" – 9 2/16"

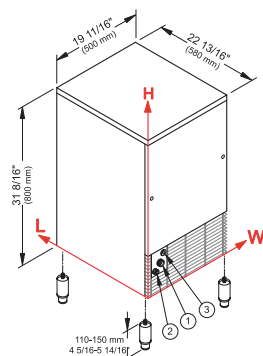

Adjustable feet 4 5/16" – 5 14/16"

- ① WATER IN: 4 6/16" – 7 11/16" – 3/4"
- ② WATER OUT: 1 15/16" – 5 15/16" – 15/16"
- ③ ELECTRICAL CONNECTIONS: 6 2/16" – 9 2/16"

## CB425A HC USA

115V, 380W, 4A
13 g
108 lbs
90 lbs
55 lbs
23" x 19.5" x 31.6"
123.5 lbs
39" x 21.5" x 24.75"
141 lbs

### Power

### Cube Size

Production/24h\*

Production/24h\*\*

### Bin Capacity


Dimensions (L x W x H)

### Net weight

Ship Dim. (L x W x H)

### Ship weight

## CB640A HC USA

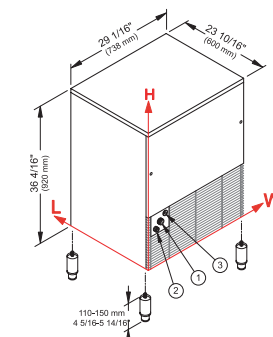


Adjustable feet 4 5/16" – 5 14/16"

- ① WATER IN: 4 6/16" – 7 11/16" – 3/4"
- ② WATER OUT: 1 15/16" – 5 15/16" – 15/16"
- ③ ELECTRICAL CONNECTIONS: 6 2/16" – 9 2/16"

## CB674A HC USA

<b>Power</b>
<b>Cube Size</b>
<b>Production/24h*</b>
<b>Production/24h**</b>
<b>Bin Capacity</b>
<b>Dimensions (L x W x H)</b>
<b>Net weight</b>
<b>Ship Dim. (L x W x H)</b>
<b>Ship weight</b>

115V, 520W, 6A
13 g
154 lbs
136 lbs
88 lbs
23.5" x 29" x 33.5"
159 lbs
40" x 30.75" x 25.25"
185 lbs

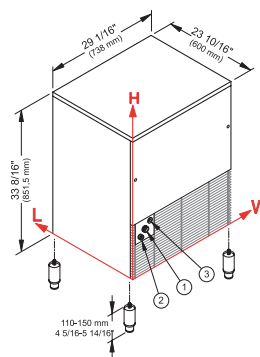

Adjustable feet 4 5/16" – 5 14/16"

- ① WATER IN: 4 9/16" – 8 11/16" – 3/4"
- ② WATER OUT: 2 2/16" – 7 1/16" – 15/16"
- ③ ELECTRICAL CONNECTIONS: 6 5/16" – 10 1/16"

\*Ambient Temperature  
21°C (70°F) / Water 10°C (50°F)  
\*\*Ambient Temperature  
32°C (90°F) / Water 21°C (70°F)



Warranty  
3 years parts & labor,  
5 years on the compressor