

## **CheeseMelters**

Models: ☐ CMC ☐ CMW

PRODUCT: QUANTITY: ITEM #:

## **Designed Smart**

- CMC-24 208V 

  CMC-24 240V
- CMC-36 208V 

  CMC-36 240V
- CMC-48 208V 

  CMC-48 240V
- Counter Mount (C)
- □ Wall Mount (W)
- □ Pass-Through (P)

## **Bid Specification**

Unit construction is stainless steel with 4" heavy-duty legs as standard, on Counter Mount and Pass-Through models. Top, sides and back (except pass-through model) are fully insulated with high quality insulation. Special designed control allows unit to maintain standby level with 25% of heating capacity. Unit has four shelf height "micro switch" that is activated by placing a plate on the shelf, which provides ultimate finishing capabilities. All controls are solid-state with electrical fan-cooled compartment. Infrared heaters are easy to snap-in and out. All hardware is stainless steel. All units are single phase.

### **Built Solid**

### **Reliability backed by APW Wyott's** Warranty

- APW Wyott's Cheese Melters is backed by a 1 year part's & labor warranty
- Certified by the following agencies:









**MODEL CDC-24 SHOWN** 

## **APW Wyott Design Feature**

- Top, sides and back (except on pass-through models) are insulated with 1" of high quality insulation.
- When the master switch is "on," the unit stays "on" at 25% of heating capacity.
- Four shelf height "micro switch".
- Food placed on rack activates heat to 100% heat "on".
- The 24" and 36" models have one unit "on-off" switch and one red unit "on" light.
- The 48" model has one unit "on-off" switch and one red unit "on" light. There are also right-half heater "on" switches and right and left "on" lights. Use half, or the entire unit as needed.
- Solid-state controls.
- Fan-cooled electrical compartment
- Instant "on," instant "off" even heating, top quartz elements.


See reverse side for product specifications.



# **CheeseMelters**

Models: ☐ CMC ☐ CMW ☐ CMP

PRODUCT: QUANTITY: ITEM #:

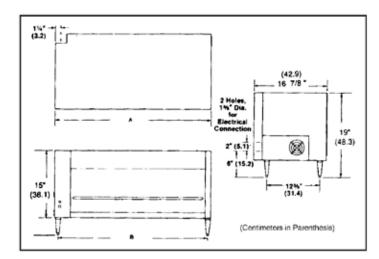

#### PRODUCT SPECIFICATIONS

#### **Construction:**

Stainless steel construction. Top, sides and back (except pass-through model) have 1" high quality insulation.

### **Electrical Specifications:**

Units are wired for hard wiring in the field.

### **Shipping Information:**

F.O.B. Cheyenne, Wyoming

_ Model	Electric	Dimensions	Lbs
CMC-24	208V, 2.4KW, 11.5 Amps	19"H x 27"W x 17"D	76 lbs.
	240V, 2.4KW, 10.0 Amps		
CMC-36	208V, 3.6KW, 17.3 Amps	19"H x 36 1/2"W x 17"D	92 lbs.
	240V, 3.6KW, 15 Amps		
CMC-48	208V, 4.2KW, 20.2 Amps	19"H x 50"W x 17"D	130 lbs.
	240V, 4.2KW, 17.5 Amps		
CMW-24	208V, 2.4KW, 11.5 Amps	15"H x 27"W x 17"D	78 lbs.
	240V, 2.4KW, 10.0 Amps		
CMW-36	208V, 3.6KW, 17.3 Amps	15"H x 361/2"W x 17"D	92 lbs.
	240V, 3.6KW, 15 Amps		
CMW-48	208V, 4.2KW, 20.2 Amps	15"H x 50"W x 17"D	130 lbs.
	240V, 4.2KW, 17.5 Amps		
CMC-24	208V, 2.4KW, 11.5 Amps	19"H x 27"W x 15 1/8"D	78 lbs.
	240V, 2.4KW, 10.0 Amps		
CMC-36	208V, 3.6KW, 17.3 Amps	19"H x 36 1/2"W x 15 1/8"D	92 lbs.
	240V, 3.6KW, 15 Amps		
CMC-48	208V, 4.2KW, 20.2 Amps	19"H x 50"W x 15 1/8"D	130 lbs.
	240V, 4.2KW, 17.5 Amps		

\*APW Wyott reserves the right to modify specifications or discontinue models without incurring obligation.