
# 96.0" 24"

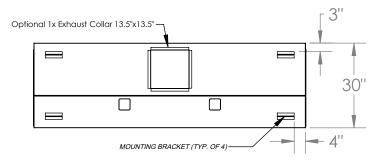

MODEL INFORMATION							
TYPE	DIMENSIONS CFM SPECS					WEIGHT	
	LENGTH	WIDTH	HEIGHT	EXHAUST PLENUM	SUPPLY PLENUM	1.57 lbs	
'	96"	30"	24"	2000 @ 0.5 ESP	N/A	13/105	

OBS.: Installing contractor have the responsability to ensure hood cleareance from limitedcombustible and combustible materials is compliant with local code requirements.

STANDARD COMPONENTS						
MOUNTING BRACKET Grease Grease ( 12-GAUGE GALVANIZED Drain Stainless Ste				Grease F Stainless S UL 104	steel	
QTY QTY QTY		QTY	Length	Height		
			0 16" 20"			
4	1	1	1	20"	20"	
			3	25"	20"	


SUGGESTED COMPONENTS							
Е	khaust Collar	Supply Collar		Light Fixture	Shipping Crate Dimensions (in) and Weight (lb)		
16-Go	16-Gauge Cold Rolled		/Δ	UL Listed (Included Component)	Length:	100"	
	Build	N/A			Width:	34"	
QTY	Size	QTY SIZE		QTY	Height:	32"	
1	13.5" x 13.5"	N/A	N/A	2	Weight:	237 lbs	

# **CSS30-8**

# STAINLESS STEEL EXHAUST HOOD N.S.F. LISTED. CONFORMS TO NFPA96

Hood Constructed with continuous liquid-tight weld in conformance to IMC 2024 507.2.5.

Hood material: 18 Gauge 430 STAINLESS STEEL (#3 polish) where exposed.




### IMPORTANT:

- 1- Drawing presented shows a typical overview of a Hood system installation, and is not intended to be used for permitting purposes.
- 2- It is the responsibility of the installing contractor to assure that the hood, grease duct and fire suppression system are installed in compliance with NFPA17A, NFPA70, NFPA72, NFPA 96, IMC, state and local codes.
- 3- The hood drawing presented on this document may vary based on which optional components were installed upon the client's request.
- 4- It is the responsibility of the installing contractor to observe field dimensions required based on hood spec, ductwork and options installed.

Superior Hoods			CSS30-8				
PO BOX 47607 - ATLANTA, GA 30360 PHONE: 770.936.0770 - www.superiorhoods.com		MODEL CSS30 STANDARD SUBMITTAL SHEET					
APPROVED		CODE		DWG NO			
CHECKED							01
DRAWN PRODUCTION 2025			SCALE: 1:34	WEIG	HT: 157 lbs	SHEET: 1/2	


# PROFILE VIEW

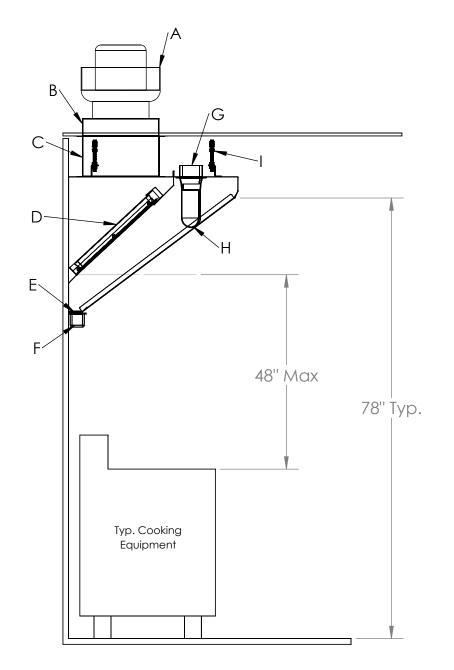


ITEM	DESCRIPTION
Α	Exhaust Fan
В	Exhaust Curb 3" Tall Typ.
С	Exhaust Riser (Sold Separately)
D	UL 1046 Approved Stainless Steel Grease Filter
Е	Grease Drain Channel
F	Removable Grease Cup not to exceed 1 Gal. Cap
G	Electrical Box (Sold Separately)
Н	UL Approved Light Fixture (Sold Separately)
	Mounting Bracket Assembly

Mounting Bracket Assembly Recomended:

- Threaded Rod not smaller than 3/8"





Superior Hoods
PO BOX 47607 - ATLANTA, GA 30360
PHONE: 770.936.0770 - www.superiorhoods.com

PROJECT CSS30-8

TITLE

TYPICAL HOOD SYSTEM INSTALLATION

APPROVED CODE CHECKED

DWG NO REV

DRAWN PRODUCTION 2025 SCALE: 1:17

SHEET: 2/2