
# 108.0" N 24"

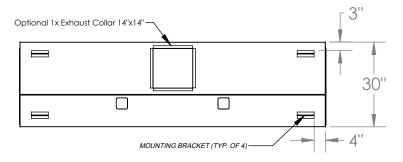

MODEL INFORMATION						
TYPE	DIMENSIONS			CFM SPECS		WEIGHT
	LENGTH	WIDTH	HEIGHT	EXHAUST PLENUM	SUPPLY PLENUM	173 lbs
'	108"	30"	24"	2250 @ 0.5 ESP	N/A	173105

OBS.: Installing contractor have the responsability to ensure hood cleareance from limited-combustible and combustible materials is compliant with local code requirements.

STANDARD COMPONENTS					
MOUNTING BRACKET 12-GAUGE GALVANIZED	Grease Drain	Grease Cup Stainless Steel NSF	Grease Filter Stainless Steel UL 1046		
QTY	QTY	QTY	QTY	Length	Height
	1	1	0	16"	20"
4			4	20"	20"
			1	25"	20"


SUGGESTED COMPONENTS						
Exhaust Collar		Supply Collar		Light Fixture	Shipping Crate Dimensions (in) and Weight (lb)	
16-Gauge Cold Rolled		N/A		UL Listed (Included	Length:	112"
	Build			Component)	Width:	34"
QTY	Size	QTY	SIZE	QTY	Height:	32"
1	14" x 14"	N/A	N/A	2	Weight:	263 lbs

## CSS30-9

# STAINLESS STEEL EXHAUST HOOD N.S.F. LISTED. CONFORMS TO NFPA96


Hood Constructed with continuous liquid-tight weld in conformance to IMC 2024 507.2.5.

Hood material: 18 Gauge 430 STAINLESS STEEL (#3 polish) where exposed.

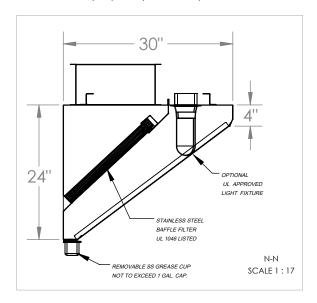


### IMPORTANT:

- 1- Drawing presented shows a typical overview of a Hood system installation, and is not intended to be used for permitting purposes.
- 2- It is the responsibility of the installing contractor to assure that the hood, grease duct and fire suppression system are installed in compliance with NFPA17A, NFPA70, NFPA72, NFPA 96, IMC, state and local codes.
- 3- The hood drawing presented on this document may vary based on which optional components were installed upon the client's request.
- 4- It is the responsibility of the installing contractor to observe field dimensions required based on hood spec, ductwork and options installed.

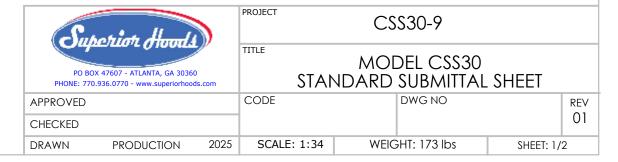


# PROFILE VIEW

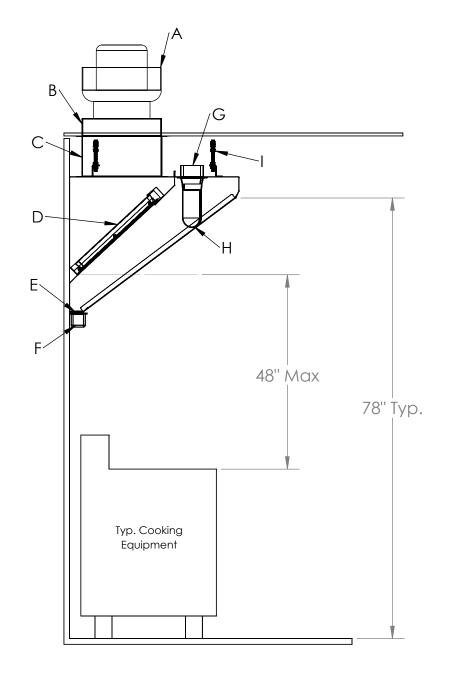

ITEM	DESCRIPTION			
Α	Exhaust Fan			
В	Exhaust Curb 3" Tall Typ.			
С	Exhaust Riser (Sold Separately)			
D	UL 1046 Approved Stainless Steel Grease Filter			
Е	Grease Drain Channel			
F	Removable Grease Cup not to exceed 1 Gal. Cap			
G	Electrical Box (Sold Separately)			
Н	UL Approved Light Fixture (Sold Separately)			
	Mounting Bracket Assembly			

Mounting Bracket Assembly Recomended:

- Threaded Rod not smaller than 3/8"





Superior Hoods
PO BOX 47607 - ATLANTA, GA 30360
PHONE: 770.936.0770 - www.superiorhoods.com

PROJECT CSS30-9

TITLE

TYPICAL HOOD SYSTEM INSTALLATION

APPROVED CODE
CHECKED

DWG NO

DRAWN PRODUCTION 2025 SCALE: 1:17

SHEET: 2/2

REV 01