

# Electric Steam Tables

## Standard Features

- Fully insulated wells—all four sides and bottom of wells are insulated by fiberglass, 8” deep, dry heating style
- Temperature control—individual infinite switch controls each well
- Two type heat elements—500 watt per well and 750 watt per well
- Stainless steel die-stamped opening—12”x20”, rising lip around well can keep well clean, and food pan to be easy to load and unload
- Poly cutting board-7” wide x 1/2” thick with 18 gauge stainless steel support shelf and brackets
- 18 gauge stainless steel top, body and under shelf
- Stainless steel tubular legs with adjustable stainless steel feet, getting table strong structure
- Indicator light of each well shows both power on and element heating
- Mechanical guards on all switches for safety and reliability
- Standard with drip pans and lids

### MODELS:

CSTEА-2B/CSTEА-3B/CSTEА-4B/CSTЕB-5B


**CSTEА-2B**



**CSTEА-3B**




**CSTEА-4B**

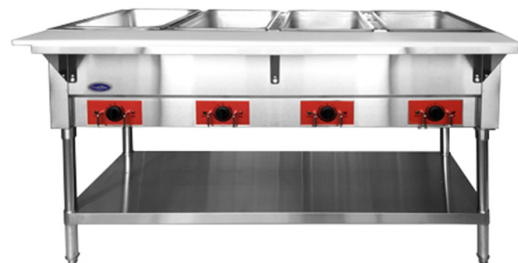

**CSTЕB-5B**



1 YR WARRANTY ON ALL PARTS AND LABOR (US ONLY)




Conforms to ANSI  
STD Z83.11b-2009 (2011)  
Certified for CSA  
STD 1.4B-2009 (2011)  
Conforms to NSF/ANSI STD.4



**SPECIFICATIONS**

| Models   | Volts | Wells | Watts/well | Total watts | PH | Top opening | Cu.ft. | Plug       | Exterior dimensions (inch)                              | Net weight (lbs) | Gross weight (lbs) |
|----------|-------|-------|------------|-------------|----|-------------|--------|------------|---|------------------|--------------------|
| CSTEА-2B | 120V  | 2     | 500        | 1000        | 1  | 2           | 10.9   | NEMA-5-15P | 30×29 <sup>1/2</sup> ×33 <sup>1/2</sup>                 | 63.9             | 77                 |
| CSTEА-3B | 120V  | 3     | 500        | 1500        | 1  | 3           | 15.5   | NEMA-5-15P | 44 <sup>1/8</sup> ×29 <sup>1/2</sup> ×33 <sup>1/2</sup> | 83.7             | 103.6              |
| CSTEА-4B | 120V  | 4     | 500        | 2000        | 1  | 4           | 19.8   | NEMA-5-30P | 58×29 <sup>1/2</sup> ×33 <sup>1/2</sup>                 | 98               | 131                |
| CSTЕB-5B | 240V  | 5     | 750        | 3750        | 1  | 5           | 29.7   | NEMA-6-20P | 72 <sup>1/2</sup> ×29 <sup>1/2</sup> ×33 <sup>1/2</sup> | 122.5            | 168                |

**PLAN VIEW**

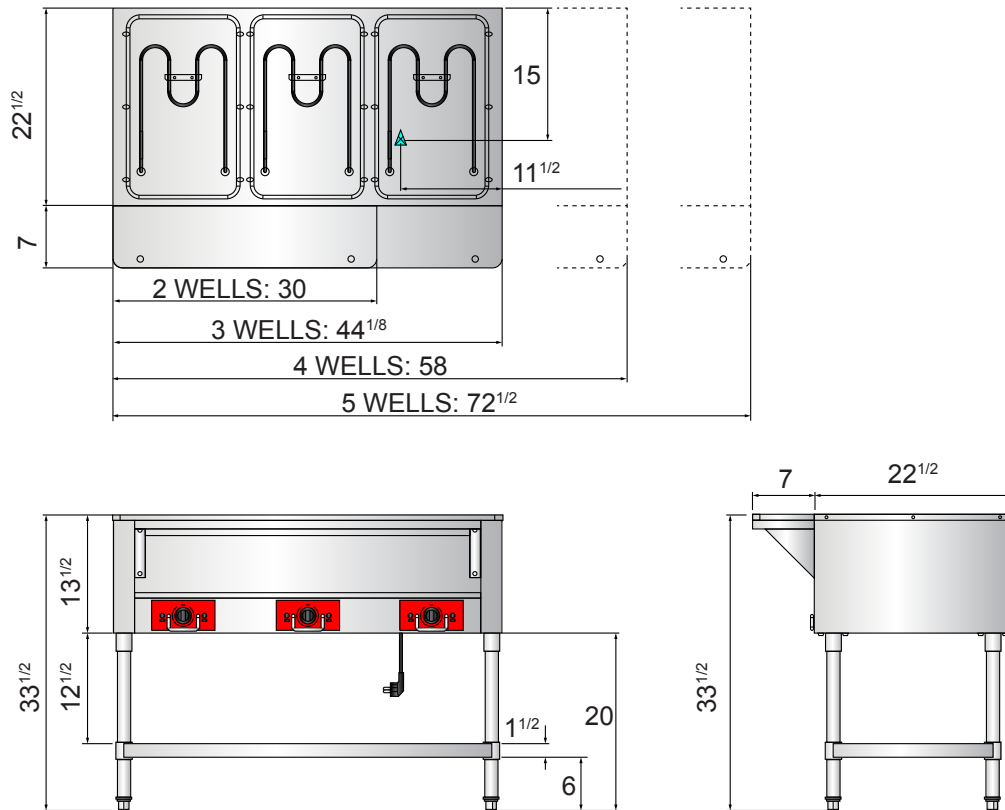

Fully insulated wells



Stainless steel exterior



Temperature control



Stainless steel legs

