



Job: _____ Item No. _____
 Notes: _____
 Model Number: PH1815 PH1835

Heated Transport Carts

SPECIFICATIONS



PH1835

DESCRIPTION

PH Series heated food transport carts are designed to hold and transport cooked food warm and ready for serving. They are constructed of sanitary stainless steel and feature a top-mounted, lift-off heating system with dial controls and blower heat for even air flow throughout the cart. Transport features include wrap-around bumper, wheel-ahead caster pattern and insulated turned-in seam construction

SHORT FORM SPECIFICATIONS

Heated food transport cart, electric. Insulated and welded, with turned-in seam, stainless steel construction, side-mounted push handles and flush-mounter transport latch with finger grip. Lift-off, top mounted, convection heater. Stainless steel tray racks with universal adjustable tray slides at 3.5" spacing; adjustable at 1.75" increments. Accommodates 12"x20" and 18"x26" pans. Non-marking, gray vinyl wrap-around bumper. Polyurethane casters set in wheel-ahead caster pattern. 120V, 60Hz, 1Ph, 1500 watts, 13A, ten foot 3 wire rubber cord with 3-prong grounding plug. NEMA 5-15P.

WARRANTY

One year warranty for parts and labor.

FEATURES

- Top mounted heating system with blower heat with full range thermostat control knob
- Dial thermometer with remote sensing bulb
- Max. temperature: 200°F (93°C); pre-heat to 160°F (71°C) in approx. 25 minutes
- All-welded, turned-in seam, double-wall, stainless steel construction
- 14 ga. stainless steel caster bolsters; 1"x1"x14 ga. perimeter tube supports welded to bolsters
- Two heavy-duty aluminum vertical push handles bolted to sides with reinforced back-up plates
- Double panel, insulated door
- Adjustable edge-mounted hinges with chrome plated finish
- Heavy-duty edge mounted latch
- Heavy-duty vinyl door gasket
- Offset, wheel-ahead caster pattern
- Non-marking gray vinyl bumper set in heavy-duty extruded aluminum frame
- Removable tray racks with adjustable tray slides at 1.75" spacing; standard spacing at 3.5"
- Accommodates 18"x26" sheet pans, 12"x20" steam table pans, GN 1/1 and GN 2/1 pans, and 20"x20" glass racks

OPTIONS AND ACCESSORIES

- Menu card holder
- Polycarbonate thermometer cover
- Side-mounted transport latch
- Locking door latch
- Rack hold down device
- Heater hold down device
- Tamper-resistant fasteners
- PH1835 only: pass-through, Dutch doors, pass-through Dutch doors (Dutch on front; solid on back)
- Alternate electrical configuration
- Alternate caster sizes
- Close-fit bumper
- Marine package
- Correctional package

CERTIFICATIONS



CARTER-HOFFMANN
 1551 McCormick Ave., Mundelein, IL 60060
 847.362.5500 800.323.9793
 www.carter-hoffmann.com

Follow Us



Form
 PH1815_1835






Job: _____ Item No. _____
 Notes: _____
 Model Number: PH1815 PH1835


Heated Transport Carts

SPECIFICATIONS


Front

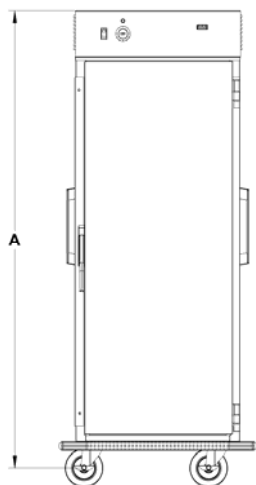

Side

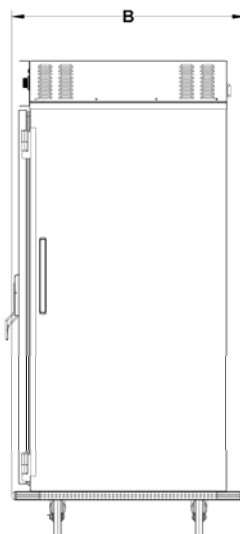

Top




CLEARANCES

A clearance of at least 2" from any wall or combustible material. A clearance of at least 36" at the front of the cabinet is required to open the door.

ELECTRICAL DATA

Single electrical connection: 120 volts, 1500 watts, 13 A, 60Hz, single phase. Ten foot, three wire rubber cord with 3-prong grounding plug. NEMA 5-15P.



Model Number	Pan Capacity		Inside Working Height		Height [A]		Depth [B]		Width [C]		Caster Diameter		Shipping Weight	
	18"x26"	12"x20"	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
PH1815	12	24	45 ³ / ₄	1162	61 ¹ / ₂	1562	38	965	31 ¹ / ₂	800	6	152	452	193
PH1835	15	30	57 ¹ / ₂	1461	75 ¹ / ₄	1911	38	965	31 ¹ / ₂	800	6	152	532	241

*Pan spacing at 3.5" (89mm). Tray slides are adjustable at 1.75" increments.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Carter-Hoffmann exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using these specifications. By using the information provided, the user assumes all risks in connection with such use.

CARTER-HOFFMANN

1551 McCormick Ave., Mundelein, IL 60060
 Phone 800.323.9793 • Fax 847.367.8981
 www.carter-hoffmann.com

Printed in the USA • PH1815_1835 • Rev. B • 02.2023
 Specifications are subject to change without notice and are not intended for installation purposes.