



# HP SERIES


## SHELF MOUNTED PLATE WARMERS

For Plates Up To 12 3/4" Diameter

CARTER-HOFFMANN



FOOD SERVICE EQUIPMENT  
HEATED PLATE WARMER

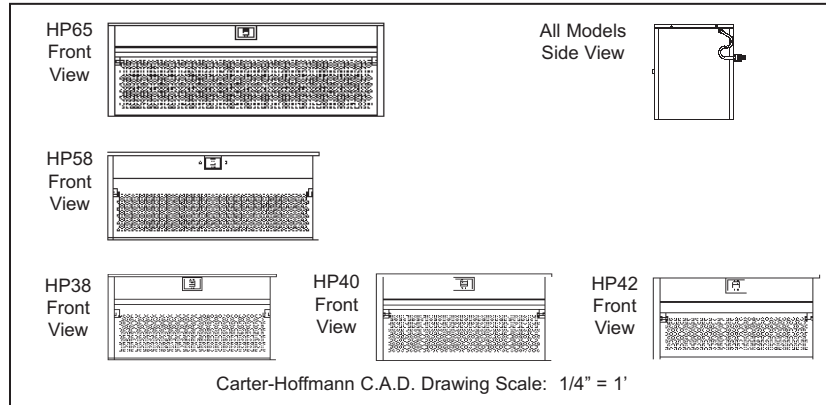

# SPECIFICATIONS

Model Number	Capacity		Inside Dimensions						Overall Dimensions						Shipping Weight	
			Height		Depth		Width		Height		Depth		Width		lbs	kg
	lbs	kg	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm		
<input type="checkbox"/> HP38	183	83	10 <sup>1</sup> / <sub>4</sub>	260	14	356	35	889	22	560	18 <sup>1</sup> / <sub>2</sub>	470	38	965	210	95
<input type="checkbox"/> HP40	193	88	10 <sup>1</sup> / <sub>4</sub>	260	14	356	37	940	22	560	18 <sup>1</sup> / <sub>2</sub>	470	40	1016	221	100
<input type="checkbox"/> HP42	203	92	10 <sup>1</sup> / <sub>4</sub>	260	14	356	39	991	22	560	18 <sup>1</sup> / <sub>2</sub>	470	42	1067	232	105
<input type="checkbox"/> HP58	280	127	10 <sup>1</sup> / <sub>4</sub>	260	14	356	55	1397	22	560	18 <sup>1</sup> / <sub>2</sub>	470	58	1473	320	145
<input type="checkbox"/> HP65	314	142	13 <sup>1</sup> / <sub>4</sub>	337	14	356	62	1575	25	635	18 <sup>1</sup> / <sub>2</sub>	470	65 <sup>1</sup> / <sub>8</sub>	1654	359	163

\*Plate capacity depends on thickness and total weight of plates.

**CONSTRUCTION...** Completely welded double wall cabinet construction. High density fiberglass insulation.

**SHELF MOUNTING PROVISIONS...** Stationary clips & hardware provided to mount unit to shelf in field. Minimum shelf load required for mounting: HP38 - 395 lbs (179 kg), HP40 - 415 lbs (188 kg), HP42 - 435 lbs (197 kg), HP58 - 600 lbs (272 kg), HP65 - 675 lbs (305 kg).

**CABINET MATERIAL...** All stainless steel construction; 20 gauge polished exterior, 16 gauge interior base. Powder coated aluminum door.

**DOOR...** Blue powder coated aluminum door. Flip up style with menu card holder. Door is recessed above plates when cabinet is open.

**INSULATION...** High density fiberglass, 1 1/2" thick on sides and top.

**CABINET CAPACITY...** Plate capacity depends on stacking height/thickness of plates. Accommodates plates up to 12 3/4" in diameter.

**GREASE FILTER...** Two piece washable pull-out grease filter. Dishwasher safe.

**CONTROLS...** Recessed on/off switch. Red power-on indicating light. Red low temperature indicating light for auto-reset high limit.

**HEATING SYSTEM...** Top mounted convection heating system. Factory set for 155 degrees. Temperature range of 120 to 185 degrees. Incoloy-sheathed heating elements, on/off switch with breaker, power indicating light and trouble indicating light.

**ELECTRICAL CHARACTERISTICS...** Operates on 120 volts, 60 cycle, single phase, 1920 watts, 16 amps. Six foot 3 wire rubber cord with 3 prong grounding plug. NEMA 5-20P. Cord located on right end.

**OPTIONS/ACCESSORIES...**

- Sliding doors in lieu of flip-up door (HP58 and HP65 only)
- Left end cord location

Specifications subject to change through product improvement & innovation.

**CARTER-HOFFMANN**

1551 McCormick Ave., Mundelein, IL 60060  
(847) 362-5500 • (800) 323-9793 • Fax (847) 367-8981  
[www.carter-hoffmann.com](http://www.carter-hoffmann.com)



Printed in U.S.A. E58 0514  
Carter-Hoffmann is a trademark of Carter-Hoffmann, LLC.

# FEATURES & BENEFITS

1551 McCormick Avenue, Mundelein, Illinois 60060  
Tel. (847)362-5500 • (800)323-9793 • Fax (847)367-8981  
www.carter-hoffmann.com




## HP SERIES SHELF MOUNTED PLATE WARMERS

*Since 1947, Foodservice Equipment That Delivers!*

**DOUBLE WALL STAINLESS STEEL CONSTRUCTION...** Strongest, most durable materials for long life and easy cleaning. High density fiberglass insulation for maximum heat retention.

**HIGH PERFORMANCE HEATING SYSTEM...** Blower system for fast heat up, recovery and heat distribution throughout cabinet. Simple on-off switch with power indicating light and red service indicator light for simple operation. Factory pre-set at 155 degrees.

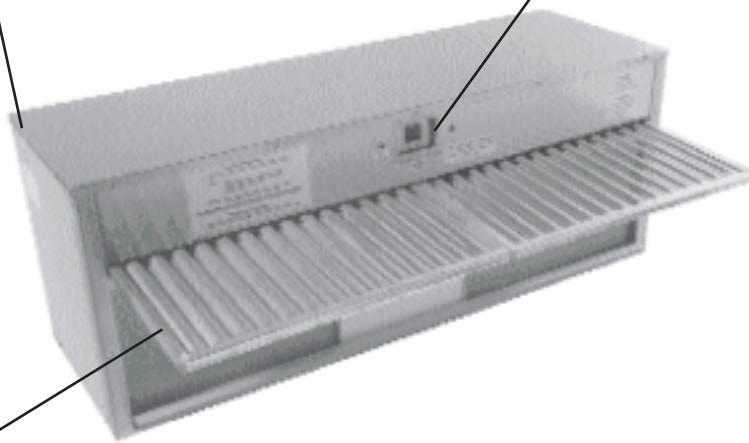

**GREASE FILTERS...** Protect heater components from grease and dirt so unit may be mounted conveniently above grill or saute station. Simple pull-out design for easy removal and cleaning. Filters can be washed by hand or run through an automatic dishwasher.

**FLIP UP DOOR...** For easy plate access, door can be pushed up into recessed track. Includes conveniently located menu card holder.

