



Project _____

Item No. _____

Quantity _____

SIX-BURNER RANGE




FEATURES

- Model available in 21,000 watts (3,500/burner)
- Freestanding design with stainless steel housing
- High-quality internal electronics and heavy gauge Litz wire
- Easy-to-clean high temperature glass-ceramic cooktop with six separate induction cook zones
- Automatic pan detection allows for instant energy transmission to pan
- LED bar graph displays
- Rotary knobs with 0–10 power settings
- Automatic shut-off feature prohibits overheating
- Integral grease filter and air baffle ensure air intake is cleaner and cooler
- Microprocessor monitors vital components to check for overheating, power supply issues, and more
- Integral fans keeps internal components cool
- Available in 200–240 VAC, 3-phase (U.S. and Canada Only)
- One-year field service warranty – U.S. and Canada

PERFORMANCE



The CookTek® Six-Burner Range is a freestanding, stainless steel design with a high-impact glass-ceramic cooktop intended for back-of-the-house applications in commercial kitchens and restaurants. An automatic shut-off feature, integral cooling fans, and self-diagnosing microprocessor allow for a safe kitchen environment. Precisely control six independent induction cook zones with 0–10 power settings to provide efficient heating of any induction-compatible pan.*

CERTIFICATIONS

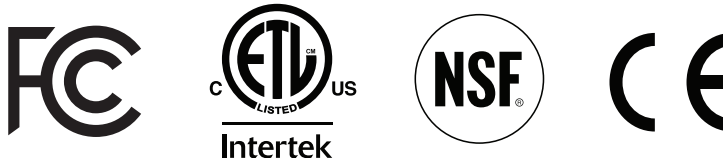

*Induction cooking requires the use of induction compatible (i.e. magnetic) cookware.

It is the owner and installer’s responsibility to comply with all local codes. CookTek reserves the right to make substitutions of components or change specifications without prior notice.

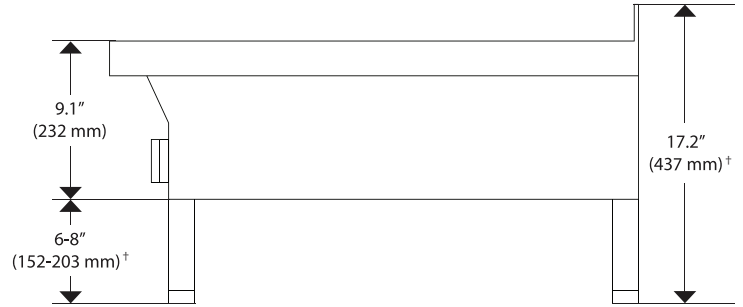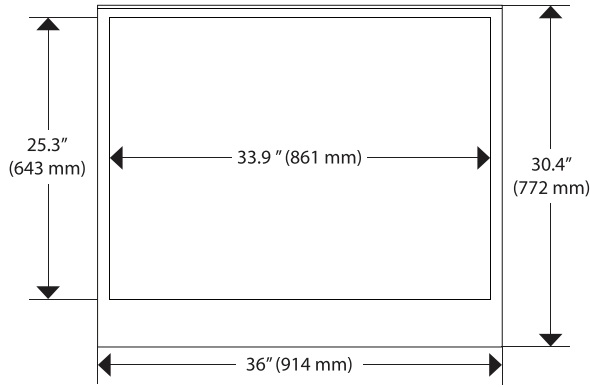

[†]Feet are adjustable. Height range is 6" – 8" (152 mm – 203 mm).

DIMENSIONS		
Full Unit Height [†]	17.2"	437 mm
Full Unit Width	36"	914 mm
Full Unit Depth	30.4"	772 mm
Cooking Surface Width	33.9"	861 mm
Cooking Surface Depth	25.3"	643 mm
Weight	175 lb.	79.4 kg
CLEARANCE		
Front	2"	51 mm
Sides	2"	51 mm
Rear	2"	51 mm
Below	The space underneath and between the legs should be kept free from obstruction.	
COOLING REQUIREMENTS AND SPECIFICATIONS		
Max Ambient Temperature	122°F	50°C
INTERNAL COOLING FAN DISPLACEMENT		
All Models	140 CFM (3.9m ³ /min)	
SHIPPING INFORMATION		
Packaged Height	29"	737 mm
Packaged Width	64"	1626 mm
Packaged Depth	45"	1143 mm
Packaged Weight	215 lb.	97.5 kg
Item Class	250 NMFC #26710	

ELECTRICAL SPECIFICATIONS (3-PHASE)		
UNITED STATES/CANADA ONLY		
MC21006-200	641600	200–240 V, 50/60 Hz, 58.3 A, 150–3,500 W

Dedicated circuit required for each installation. Cord and plug are NOT INCLUDED.