



RESOURCES

UNDERBAR REFRIGERATION



Use your smart phone to scan the above QR code to visit our website: www.bk-resources.com

Model: Solid Door

DBC-24-95

Draft Beer Cooler



DBC-24-95

- Heavy Duty Construction**
 Top is made of solid 18 gauge stainless steel, including drip tray(s), for easy cleaning. Wear resistant black vinyl exterior. Galvanized interior with SS floor and coved corners. Drain is located in rear of cabinets to keep unit pristine at all times.
- Polished Stainless Steel Towers**
 Draft towers are three inches in diameter, stainless steel with polyurethane insulation. The continuous flow of cold air throughout the tower results in a perfect pour.
- Field Interchangeable Doors**
 Field interchangeable doors from Solid to Glass or Glass to Solid.
- Enhanced Refrigeration System**
 Factory engineered oversized and balanced refrigeration system. CFC free R-134a refrigerators maintain temperature between 33°F to 38°F, keeping beers ice cold.
- Side Mounted Compressor & Front Breathing**
 System allows for easy service and unrestricted placement of the unit.
- Analog Thermostat**
- Stay Open Doors with Locks & LED Light**
 90° stay open door feature and LED light underneath the mullion.
- Open Cavity**
 Evaporator located on left side above compressor provides an open cavity and more working room.
- Magnetic Gasket**
 One Piece gasket removable without tools for ease of cleaning and replacement.
- 2 Towers 4 Taps**

PRODUCT DATA SHEET

RESOURCES



Specifications subject to change without notice

MODEL	DOORS	Towers	Taps	Kegs	AMPS	HP	VOLTAGE	NEMA PLUG	CABINET DIMENSIONS			SHIPPING	
									L	W*	D	WT.	CUBES
DBC-24-95	3	2	4	5	7.2	1/3	115/60/1	5-15P	95	1/2" x 28"	x 37"	429	81



ISO 14001

ISO 9001

* Depth does not include 1" bumper

Conforms to UL and NSF-7 standards

Phone: 888-310-4393

Fax: 888-310-4394

Website: www.bk-resources.com

Email: sales@bk-resources.com



RESOURCES

UNDERBAR REFRIGERATION

Model:

DBC-24-95

Draft Beer Cooler

Construction

- 18 gauge stainless steel top and stylish black vinyl finish front, sides and back. Interior built of galvanized steel walls with coved corner stainless steel floor.
- Interior LED light.
- The entire cabinet has a 1-1/2" CFC-free, polyurethane insulation foamed-in-place.
- Field interchangeable doors with 90° stay open feature and locks standard.
- One piece magnetic gaskets for easy cleaning.

Refrigeration System

- Oversized and balanced refrigeration system.
- Self-contained capillary tube system using environmentally friendly and CFC-free refrigerant. R-134a holding temperature at 33°F to 38°F.
- Front breathing/side mount compressor for ease of service and placement in narrow spaces. Condensing unit is behind the front grill, slides out for easy cleaning and maintenance.

- Forced air cooling system for faster cooling and constant temperature in the cabinet.
- Large fan motor and fan blades for better air circulation.
- Self contained system, no plumbing necessary.
- Analog thermostat.

Options & Accessories

- Single/Double Draft Towers
- 3" Casters
- 3-way gas valve & 4-way gas valve
- Dunnage Floor
- 220v-50Hz-1Phase

Electrical

- Each unit is completely pre-wired at factory with cord and plug set included and ready for final connection to a 11/60/1 phase.
- 220V/50hz/1ph available




115/60/1
Nema-5-15P

Warranty


Continental USA & Canada

- One year labor and parts
- Five year compressor
- International: one year parts only


Plan View Top

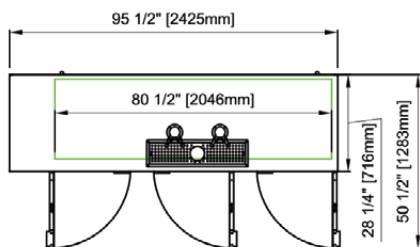

Front

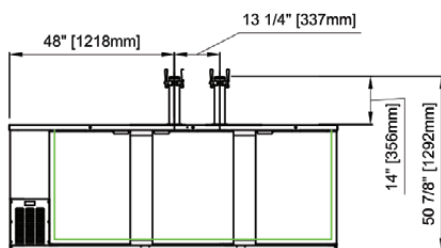

Side



ISO 1400

ISO 9001

Conforms to UL and NSF-7 standards