

N225P/N227P Self-Contained Drop-In Freezer

Models

- N225P 6 Gallon Drop In Freezer with Stainless Steel Lid
- N227P 12 Gallon Drop In Freezer with Stainless Steel Lid

Project	
Item	
Quantity	\mathbb{N}
CSI Section 11400	$\overline{\mathbf{N}}$
Approved	
Date	
	Ū,
	\sim
	N)



Standard Features Suitable for ice cream storage

- 18-gauge stainless steel top
- · Die stamped top opening with raised edge
- · High-density environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane foam throughout unit
- Mechanically cooled -5° to +40°F tank · Folding removable cover with external
- handle
- 8' cord and plug
- Environmentally friendly R290 refrigerant
- One year parts and 90 day labor standard warranty

Options & Accessories Locking device

Clear lid (shipped loose)

Specifications Model N225P

> Top of 18-gauge stainless steel, has 0.63" (1.73 cm) overhang front to back and 0.68" (1.73 cm) right to left, one die-stamped 10.50" (26.67 cm) x 20.68" (52.52 cm) opening with raised edges. Opening is fitted with insulated, folding, lift-off cover. N225P model available with optional acrylic lid which is sold seperately, quantity of 1 required.

> Freezer compartment interior is 22-gauge stainless steel and measures 10.81" (27.46 cm) x 22.12" (56.18 cm) x 12.18" (30.94 cm) high. Compartment sides are wrapped with refrigeration lines. Sides and bottom are insulated with high-density closed-cell environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane. Unit is designed to maintain -5° to +40°F. Cabinet capacity is 6 gallons.

Condensing unit mounted below freezer compartment on 16-gauge steel frame, has 0.20 H.P. rating.

A stainless steel louver, 13" (33 cm) x 25" (63.5 cm), is supplied for field installation. The cutout size for the louver is 12.00" (30.48 cm) x 23.50" (59.68 cm).

Model N227P

Top of 18-gauge stainless steel, has 0.63" (1.73 cm) overhang front to back and 0.68" (1.73 cm) right to left, two die-stamped 10.50" (26.67 cm) x 20.68" (52.52 cm) opening with raised edges. Openings are fitted with insulated, folding, lift-off covers. N227P model available with optional acrylic lid which is sold seperately, quantity of 2 required.

Freezer compartment has 22-gauge stainless steel interior and measures 24.25" (61.60 cm) x 22.12" (56.18 cm) x 12.18" (30.94 cm) high. Compartment sides are wrapped with refrigeration lines. Insulation on sides and on bottom is high-density closed-cell environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane. Unit is designed to maintain -5° to +40°F. Cabinet capacity is 12 gallons.

0.22 H.P. condensing unit is mounted below freezing compartment on 16-gauge steel frame.

A stainless steel louver, 13" (33 cm) x 25" (63.5 cm), is supplied for field installation. The cutout size for the louver is 12.00" (30.48 cm) x 23.50" (59.68 cm).


Phone: 800-733-8948 or 989-773-7981 Fax: 800-669-0619

www.delfield.com



R290



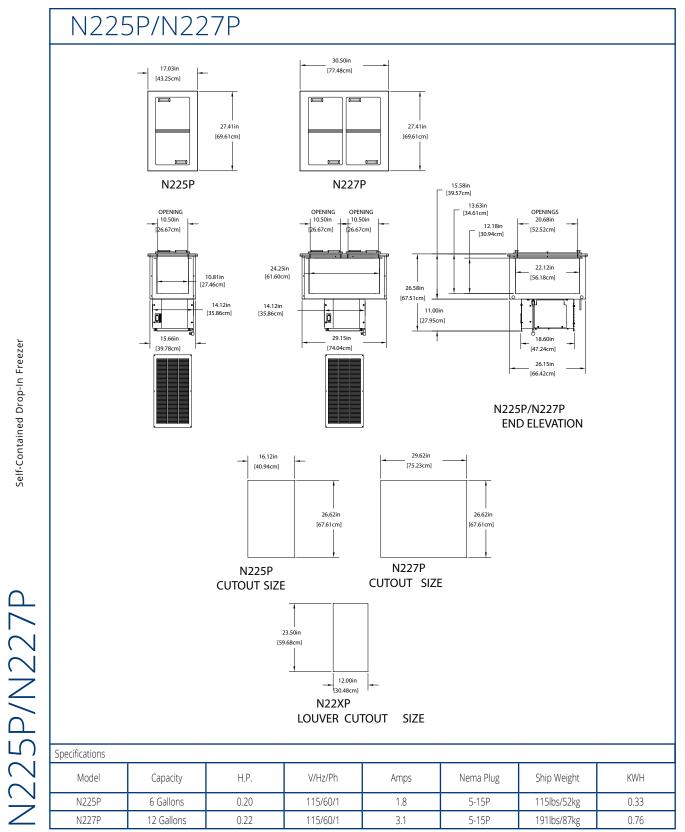

Welbilt reserves the right to make changes to the design or specifications without prior notice.

980 S. Isabella Rd. Mt. Pleasant, Michigan 48858 Phone: 800-733-8948 or 989-773-7981 Fax: 800-669-0619 www.delfield.com

Printed in the U.S.A. 5858A_DEL_N225P_N227P 03/17

