



# CTP-NB

Countertop Refrigerated Prep Rail

Project \_\_\_\_\_  
 Item \_\_\_\_\_  
 Quantity \_\_\_\_\_  
 CSI Section 11400  
 Approved \_\_\_\_\_  
 Date \_\_\_\_\_

CTP-NB: Countertop Refrigerated Prep Rail

## Models

- CTP 8146-NB 46" countertop refrigerated prep rail, (4) 1/3 pan capacity
- CTP 8160-NB 60" countertop refrigerated prep rail, (6) 1/3 pan capacity



CTP8146-NB

## Standard Features

- Stainless steel top and interior
- Environmentally friendly R404a refrigerant
- High density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane keeps energy costs low
- Mechanically cooled rail with integral V-stamped pan rest
- NSF7 certified
- One year parts and 90 day labor standard warranty

## Options & Accessories

- 230 volt, 50 Hertz electrical system
- \* *Inclusion of this option will alter electrical specifications of the unit*

## Specifications

**Exterior Top and Sides** are 18-gauge stainless steel. Back of unit is 18-gauge galvanized steel. Unit has a mechanically cooled refrigerated raised rail with die-stamped opening(s) to accommodate 12" x 20" (30.5cm x 50.8cm) hotel pans, by others. Adapter bars supplied with unit. Pans are recessed 2" (5.1cm) from the top and rest on integral V-stamped supports. Raised rail openings have 18-gauge stainless steel hinged removable covers.


**Unit Interior** has a 22-gauge stainless steel liner with foamed-in-place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane insulation.

**Base** of unit has removable louvers at front and rear for proper air flow and access to the condensing unit. Protective rubber bumpers affixed to the back of the unit allow proper air flow

**Refrigeration System** uses R404a refrigerant. Refrigerated rail is designed to maintain 41°F (5°C) at 86°F ambient for up to (4) hours. Food and product should be placed in unit at 37°F (3°C). On/off switch is located at the right end of the unit.

**Electrical Connection** is 115 volt, 60 Hertz, single phase. Unit is wired with a 3-wire, grounded and has a 8' (2.4 m) long electrical cord and NEMA 5-15P plug.



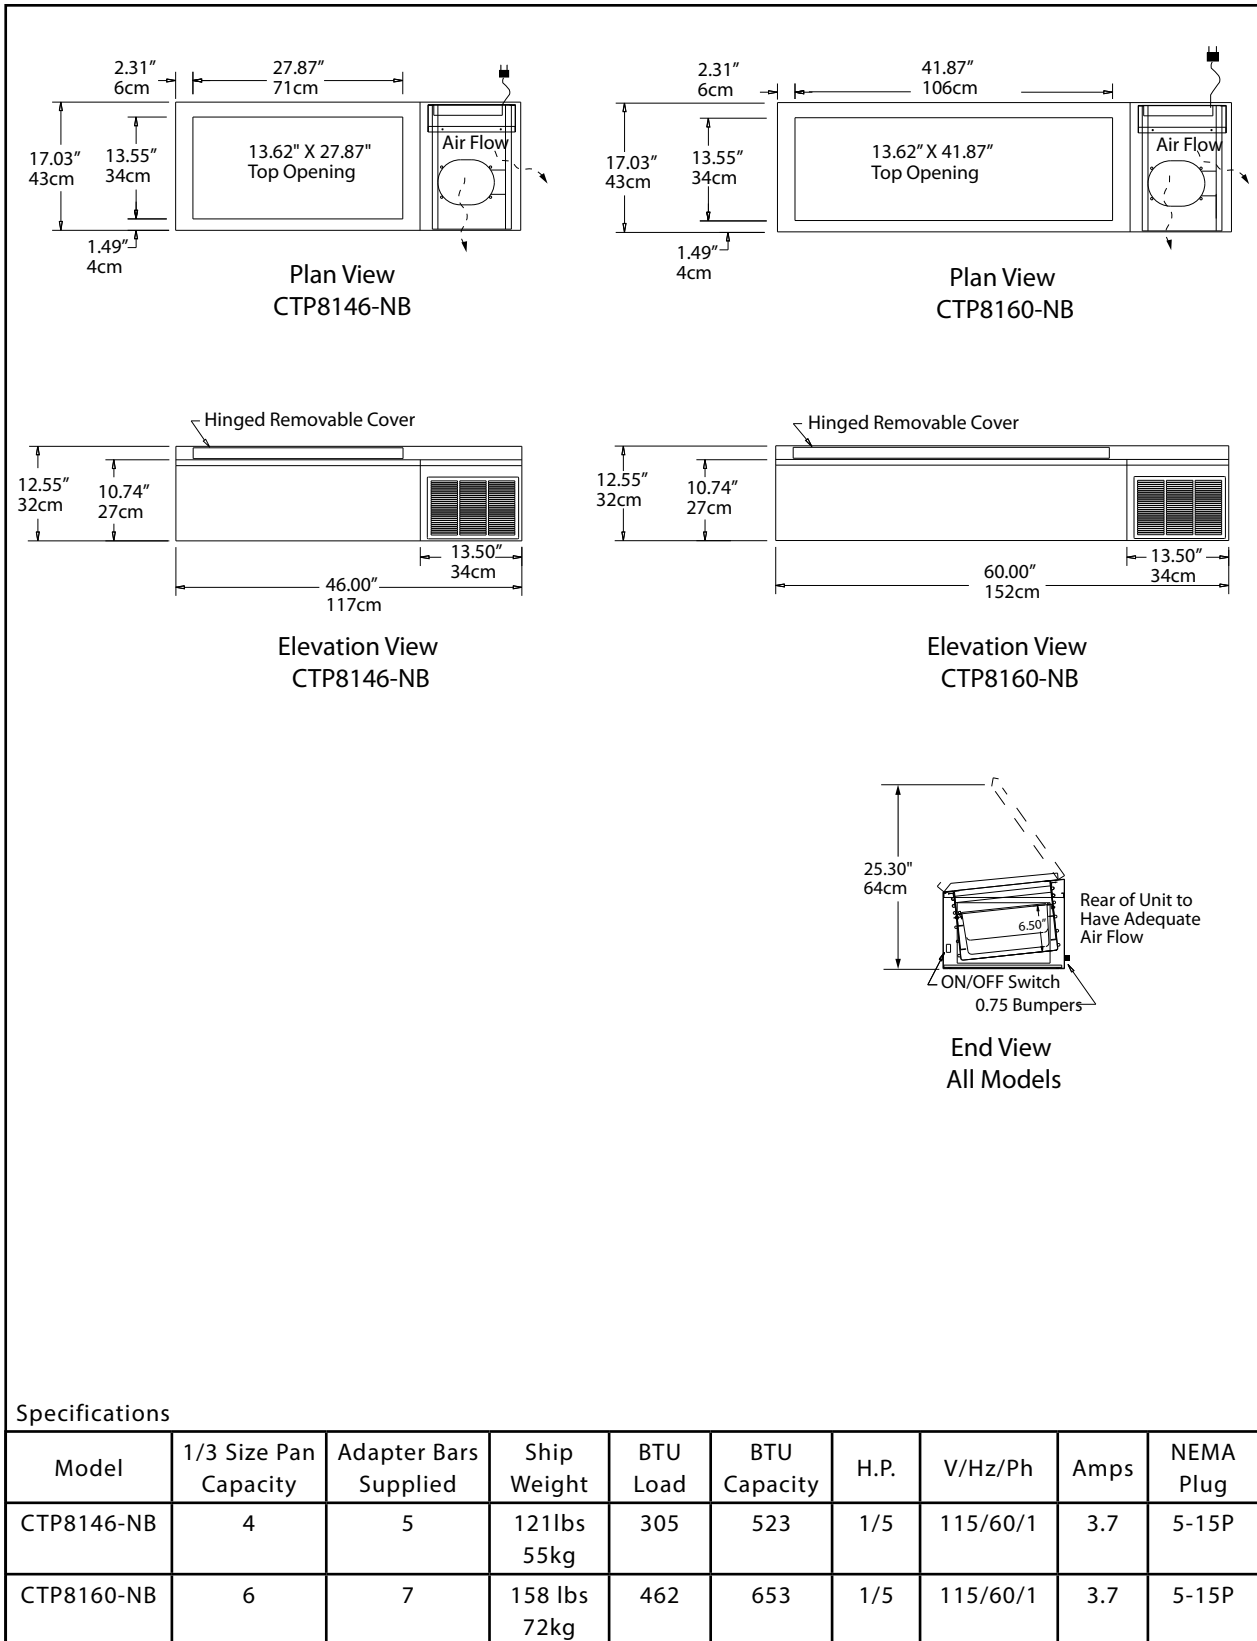

Delfield reserves the right to make changes to the design or specifications without prior notice.