

Project \_\_\_\_\_  
 Item \_\_\_\_\_  
 Quantity \_\_\_\_\_  
 CSI Section 11400 \_\_\_\_\_  
 Approval \_\_\_\_\_  
 Date \_\_\_\_\_

## Delta® HT-E-SEER-S

### Models

Delta HT-E-SEER-S

### Short/Underbar Design



#### Standard Features

- Steam Elimination
- Energy Recovery System collects the hot water vapor inside the machine and uses it to preheat the incoming rinse water
- Operates on a single cold water connection
- Soft Start helps protect glassware from chipping and breaking
- 6" ( 153 mm) clearance facilitates cleaning beneath the machine
- Stainless steel rear dress panel
- Automatic fill
- Push button start
- Door interlock
- Pressure regulator
- Built-in booster heater with Sani-Sure™ final rinse system
- Automatic pumped drain for floor and wall drain installations
- Stainless steel wash pump
- Universal timer
- Digital LED control panel
- Delime cycle
- Simplified controls allow easy access for operation and service
- Built-in chemical pumps and priming switches

#### Mandatory Specs

Specify voltage \_\_\_\_\_

#### Options

- Water Hammer Arrestor
- Drain Water Tempering Kit
- Scale Prevention System (SPS)
- Replacement Cartridge for SPS

#### Accessories

- 36-Compartment Rack
  - 4-1/8" tall (105 mm)
  - 5-5/8" tall (143 mm)
  - 7" tall (178 mm)
- Combination Rack
- Peg Rack

*NOTE: A vent hood is not recommended above the Jackson Delta HT-E-SEER as it does not produce excessive vapors. Always check with the local building code to know what type of ventilation is required for commercial dish machine or glasswasher installations in your area.*

### Specifications

High temperature undercounter dishwasher with steam elimination and energy recovery

Operates on a single cold water connection

Uses 0.65 gallons (2.47 liters) of water per rack

Uses 13.0 gallons (49.21 liters) of water per hour

Cleans 20 racks per hour

Cleans 720 glasses per hour

12" (305 mm) chamber clearance

Practical 21.88" (556 mm) loading height

Three selectable cycles:  
 Normal - 145 seconds  
 Heavy - 213 seconds  
 Extra-Heavy - 313 seconds

Powerful 1 hp wash pump motor

Air insulated between body and stainless steel housing

One (1) each peg and combination rack included

Durable stainless steel construction




Intertek



Intertek



## Delta® HT-E-SEER-S

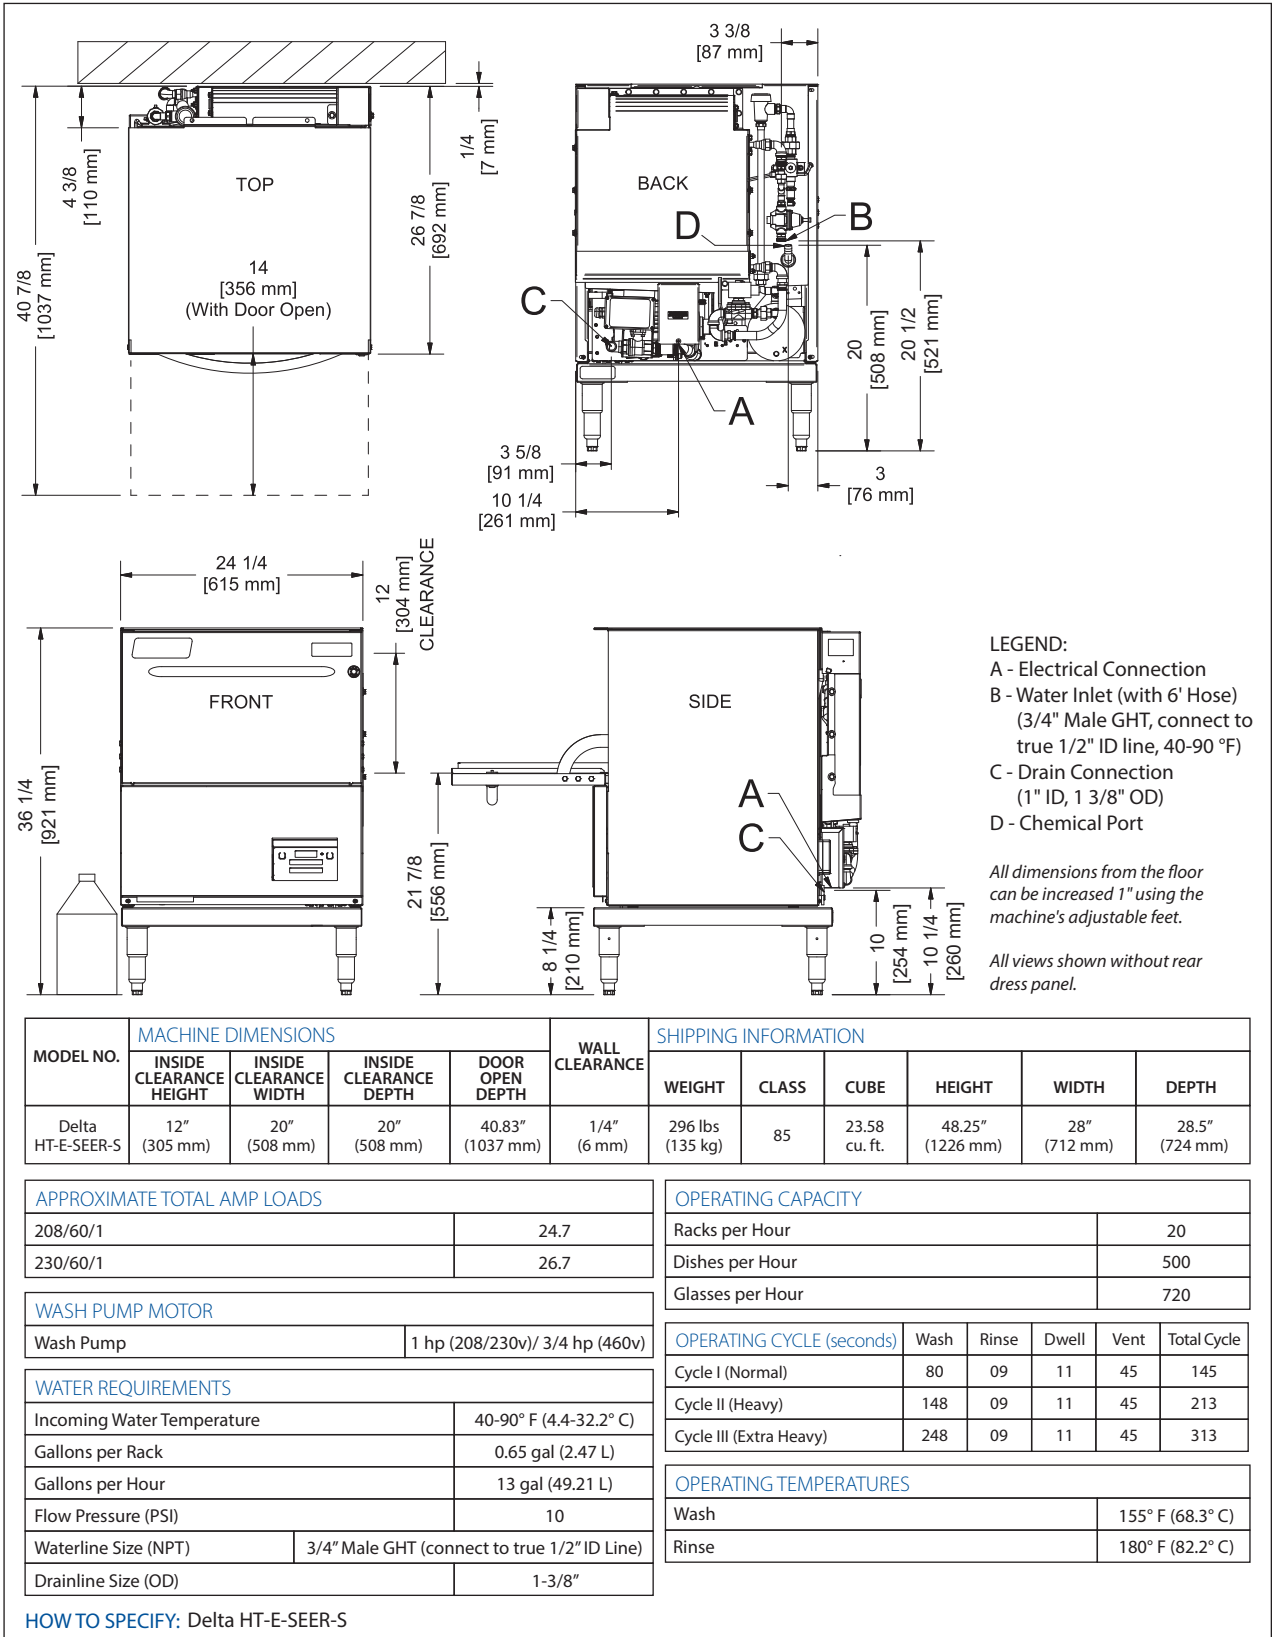

**Jackson WWS, Inc.**

Shipping Address: 6209 North U.S. Highway 25E, Gray, KY 40734  
 Mailing Address: P.O. Box 1060, Barbourville, KY 40906  
 Telephone: 888-800-5672 • Fax: 606-523-1799  
 Email: info@jacksonwws.com  
 07610-004-57-18 [05/01/18]

[www.jacksonwws.com](http://www.jacksonwws.com)