

CSRRTP Roll-Thrus

Coolscapes™ Roll-Thru Refrigerators

Project	
Item	
Quantity	
CSI Section 11400	
Approved	
Date	

Models	5
--------	---

CSRRT2P-S



CSRRT1P-S

Standard Features

- GreenGenius™ R290 top mount refrigeration S/S finish door liner system featuring TXV expansion valve and • Laminate – front, ends, shroud hot gas condensate removal
- Digital exterior temperature display with Trim strips high/low temp visual alarms
- · Energy saving LED interior light
- · Removable side louver
- · Raised ABS interior door liner
- · Smart door hinge that auto closes up to 90° and stays open past 90°
- · Energy efficient door gasket removable without tools
- Door locks
- 10' cord and plug attached
- · Stainless steel exterior front, sides & interior
- 115V / 60C / 1 P Standard

Options

- Heat shield end max temp 400 degrees

Specifications

Refrigeration system: All components are mounted to the top cabinet ceiling, outside the food zone and are assembled as one piece and can be removed as one piece. Environmentally friendly R290 refrigerant is used. System has the capability of maintaining between 33°F and 40°F in heavy use food service operations. Refrigerant is metered using a highly responsive thermostatic expansion valve. System is controlled using an electronic temperature control, which provides improved pull down times, reducing compressor cycling and longer compressor life with lower energy consumption. Control system uses adaptive defrost to assure evaporator coil is free of ice and operating at optimum efficiency. Evaporator condensate is eliminated using an energy efficient hot gas system.

Units are completely insulated with high density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane.












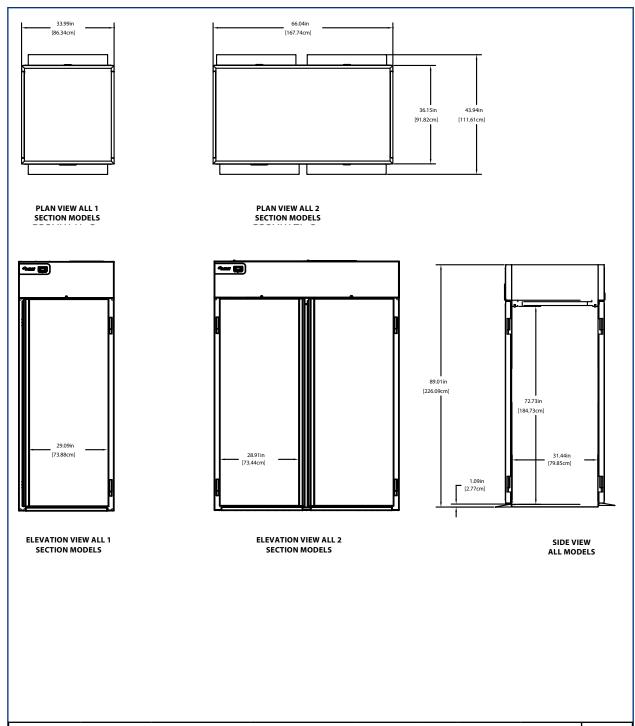

	Specifications									
	Model	V/Hz/Ph	Amps	Volume Cu. Ft.	SHELF CAPACITY SQ. FT.	No. of Shelves	Unit H.P.	Btu/Hr System Cap	Ship Weight	Nema Plug
	CSRRT1P-S	115/60/1	6	39	N/A	N/A	0.35	2385		5-15P
	CSRRT2P-S	115/60/1	6.5	80.5	N/A	N/A	0.38	3320		5-15P

Delfield reserves the right to make changes to the design or specifications without prior notice.

