

PROJECT	
ITEM #	
QUANTITY	DATE
APPROVAL	

DIS

Drop-in dish dispensers

Short form specifications

Dispenser tube shall have 3 vertical side channels and a bottom brace of 22-gauge stainless steel. Top supporting flange shall be 18-gauge stainless steel. Flange, channels and bottom brace shall be integrally welded together. Flange shall have 3 guide posts molded from high impact plastic.

Self-leveling mechanism shall be field adjustable by adding or removing stainless steel extension springs on perimeter of vertical side channels. The dish carrier head shall be stainless steel welded rods with a removable 18-gauge stainless steel top plate. Tube shall suspend in a 28.00" (71.1cm) high space.

Capacity of tubes shall be approximately 72 dishes, with a maximum stacking height of 24.00" (61.0cm).

NOTE: Models without "-ET" or "-QT" suffix are unheated, and do not include a stainless steel outer jacket.

THE FOLLOWING APPLIES TO DIS-ET EVEN TEMP HEATED DISPENSERS ONLY:

Dish dispenser shall have a 22-gauge stainless steel outer jacket. Unit shall be supplied with 4'0" (0.9m) cord and NEMA 5-15P plug. Electrical connections shall be 120 volt, 60 hertz, single phase.

The tube shall have its own convection heating module consisting of a single 400 watt heating element and fan motor, located in the center of the interior bottom cavity. Air intake shall have a filter. The tube shall have an adjustable thermostat inside the motor housing and an ON/OFF switch on one of the dish guide posts. Unit requires a minimum of 1" (2.54cm) clearance at bottom for air circulation. Unit shall maintain temperature between 120°F–140°F (49°C–60°C).

THE FOLLOWING APPLIES TO DIS-QT QUICK TEMP HEATED DISPENSERS ONLY:


Dish dispenser shall have a 22-gauge stainless steel outer jacket. Unit shall be supplied with 3' (0.9m) cord and NEMA 5-15P plug. Electrical connections shall be 120 volt, 60 hertz, single phase.

The tube shall have its own convection heating module consisting of a single 700 watt heating element and fan motor, located in the center of the interior bottom cavity. Air intake shall have a filter. The tube shall have an adjustable thermostat inside the motor housing and an ON/OFF switch on one of the dish guide posts. Unit requires a minimum of 1" (2.54cm) clearance at bottom for air circulation. Unit shall maintain temperature between 150°F–170°F (66°C–77°C).

Unit shall have a stainless steel cover.

Optional accessories & modifications





- q Shorten dispenser tubes to special length
- q Stainless steel outer jacket for dispenser tubes-non-heated (standard on ET or QT)
- q 12" (30.5cm) dia. stainless steel dish dispenser tray (DIS-1200, DIS-1200-ET and DIS-1200-QT only)
- q Non-marring adjustment rods for oval dishes and various dish diameters (–813 through –1450 sizes only)
- q Stainless steel cover with access to dishes (–813 through –1450 sizes only; standard on QT models)
- q Stainless steel cover
- q Hold-down rod for dispenser tubes
- q Special voltages (consult factory)

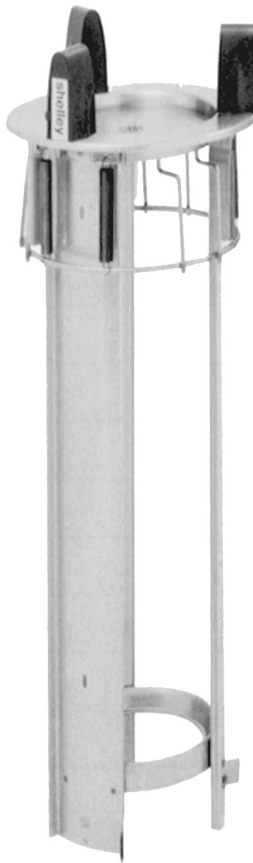

Model DIS-650



Drop-in dish dispensers

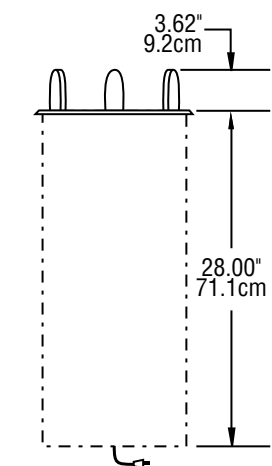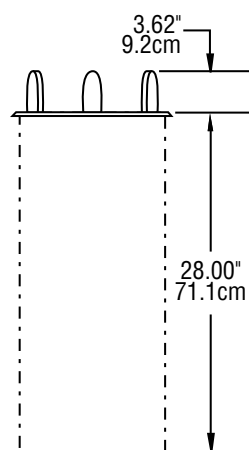

MODEL NUMBER	FLANGE DIA.	HEIGHT	CUTOUT DIA.	DISH DIAMETER RANGE	AMPS	SHIP WEIGHT
DIS-500	8.37" 21.3cm	28.00" 71.1cm	7.75" 19.7cm	3.00"-5.00" 7.6cm-12.7cm		8 lbs 3.6 kg
DIS-575	9.12" 23.2cm	28.00" 71.1cm	8.50" 21.6cm	5.00"-5.75" 12.7cm-14.6cm		9 lbs 4.1 kg
DIS-650	9.87" 25.1cm	28.00" 71.1cm	9.25" 23.5cm	5.75"-6.50" 14.6cm-16.5cm		9 lbs 4.1 kg
DIS-725	10.62" 27.0cm	28.00" 71.1cm	10.00" 25.4cm	6.50"-7.25" 16.5cm-18.4cm		10 lbs 4.5 kg
DIS-813	11.50" 29.2cm	28.00" 71.1cm	10.87" 27.6cm	7.25"-8.12" 18.4cm-20.6cm		11 lbs 5.0 kg
DIS-913	12.50" 31.8cm	28.00" 71.1cm	11.87" 30.1cm	8.12"-9.12" 20.6cm-23.2cm		12 lbs 5.4 kg
DIS-1013	13.50" 34.3cm	28.00" 71.1cm	12.87" 32.7cm	9.12"-10.12" 23.2cm-25.7cm		13 lbs 5.9 kg
DIS-1200	15.37" 39.1cm	28.00" 71.1cm	14.75" 37.5cm	10.12"-12.00" 25.7cm-30.5cm		14 lbs 6.4 kg
DIS-1450	17.87" 45.4cm	28.00" 71.1cm	17.25" 43.8cm	12.00"-14.50" 30.5cm-36.8cm		17 lbs 7.7 kg
DIS-500-ET	8.37" 21.3cm	28.00" 71.1cm	7.75" 19.7cm	3.00"-5.00" 7.6cm-12.7cm	5.0	19 lbs 8.6 kg
DIS-575-ET	9.12" 23.2cm	28.00" 71.1cm	8.50" 21.6cm	5.00"-5.75" 12.7cm-14.6cm	5.0	20 lbs 9.1 kg
DIS-650-ET	9.87" 25.1cm	28.00" 71.1cm	9.25" 23.5cm	5.75"-6.50" 14.6cm-16.5cm	5.0	21 lbs 9.5 kg
DIS-725-ET	10.62" 27.0cm	28.00" 71.1cm	10.00" 25.4cm	6.50"-7.25" 16.5cm-18.4cm	5.0	23 lbs 10 kg
DIS-813-ET	11.50" 29.2cm	28.00" 71.1cm	10.87" 27.6cm	7.25"-8.12" 18.4cm-20.6cm	5.0	25 lbs 11 kg
DIS-913-ET	12.50" 31.8cm	28.00" 71.1cm	11.87" 30.1cm	8.12"-9.12" 20.6cm-23.2cm	5.0	27 lbs 12 kg
DIS-1013-ET	13.50" 34.3cm	28.00" 71.1cm	12.87" 32.7cm	9.12"-10.12" 23.2cm-25.7cm	5.0	29 lbs 13 kg
DIS-1200-ET	15.37" 39.1cm	28.00" 71.1cm	14.75" 37.5cm	10.12"-12.00" 25.7cm-30.5cm	5.0	32 lbs 15 kg
DIS-1450-ET	17.87" 45.4cm	28.00" 71.1cm	17.25" 43.8cm	12.00"-14.50" 30.5cm-36.8cm	5.0	37 lbs 17 kg
DIS-813-QT	11.50" 29.2cm	28.00" 71.1cm	10.87" 27.6cm	7.25"-8.12" 18.4cm-20.6cm	8.0	30 lbs 14 kg
DIS-913-QT	12.50" 31.8cm	28.00" 71.1cm	11.87" 30.1cm	8.12"-9.12" 20.6cm-23.2cm	8.0	32 lbs 15 kg
DIS-1013-QT	13.50" 34.3cm	28.00" 71.1cm	12.87" 32.7cm	9.12"-10.12" 23.2cm-25.7cm	8.0	34 lbs 15 kg
DIS-1200-QT	15.37" 39.1cm	28.00" 71.1cm	14.75" 37.5cm	10.12"-12.00" 25.7cm-30.5cm	8.0	37 lbs 17 kg
DIS-1450-QT	17.87" 45.4cm	28.00" 71.1cm	17.25" 43.8cm	12.00"-14.50" 30.5cm-36.8cm	8.0	41 lbs 19 kg

NOTES

- All DIS-ET and DIS-QT models have 120 volt, 60 hertz, single phase electrical connections, and include a 4'0" (0.9m) cord with NEMA 5-15P plug.
- Optional adjusting rods (available on 813-1450 models only) reduce the maximum round dish diameter by 1.25" (3.2cm); overall adjustment by rods is 1.50" (3.8cm). Installed by factory only.
- Dish guide posts stand an additional 3.62" (9.2cm) above the top.