



# DSLH-G Reach-Ins

Reach-In Heated w/Glass Doors

## Models

☐ DSLH1-G

☐ DSLH2-G

☐ DSLH1-GH

☐ DSLH2-GH



DSLH2-G

## Standard Features

- Stainless steel exterior and interior
- easyTouch Control with remote monitoring capability
- Stay-open door feature for easy product loading and unloading
- Stainless steel door(s)
- Door activated interior LED light
- Heavy-duty cylinder lock
- One piece, snap-in door gaskets
- Stainless steel breaker caps
- 3 silver freeze wire shelves
- 6" high adjustable stainless steel legs
- 8' cord and plug
- Adjustable Electronic Temp Control From 80°F To 180°F
- Built-In, Adjustable Humidity Control Vent
- Safety Shielded Strip Type Heating Elements
- Externally Mounted Blower Maintains Even Temperatures
- Three year parts and labor warranty and an additional 4 year compressor parts warranty.

## Options & Accessories

- Stainless Steel Back And Shroud
- Tray Slides (type A & A/C)
- 3" Or 6" Casters
- Stainless Steel Kick Plate
- Door Swing Orientation (at time of order)
- Exterior Door Laminate
- Correctional Package
- Additional Shelves
- 6" Seismic Legs


## Specifications

**Heating system:** Cabinets are designed to maintain temperatures between 80°F - 180°F. Units are heated with two bottom-mounted heating elements per section. The externally mounted blower allows for full use of interior cabinet while maintaining even temperatures. System is controlled using an electronic temperature control.




DSLH-G Heated Reach-Ins




## DSLH-G Heated Reach-Ins

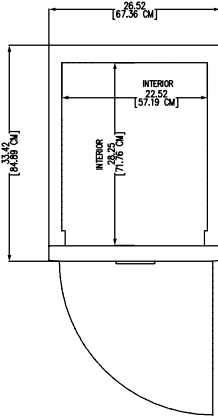

DSLH1-G

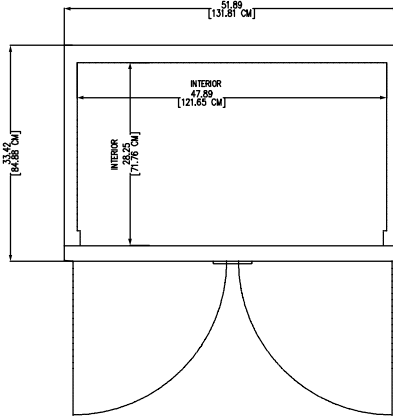


DSLH2-G

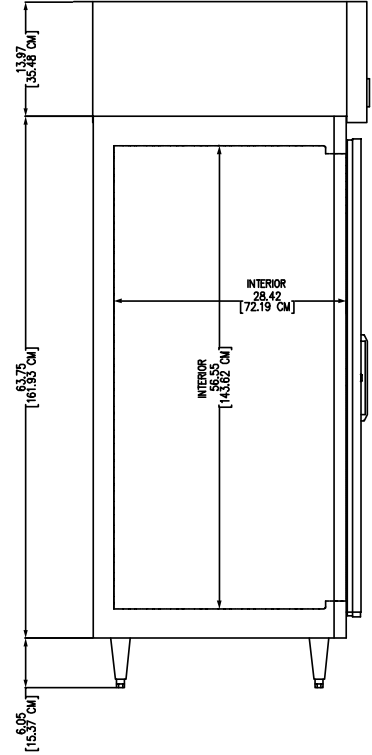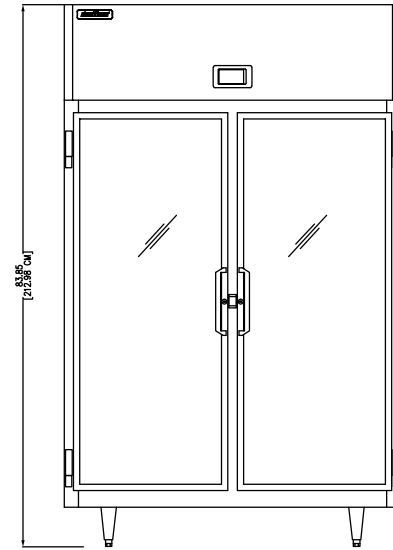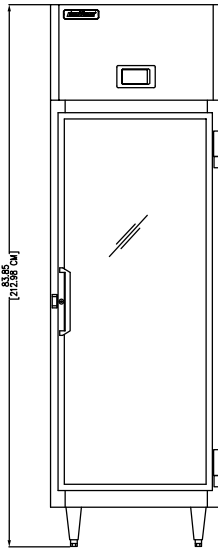

Welbilt reserves the right to make changes to the design or specifications without prior notice.

## DSLH-G Heated Reach-Ins

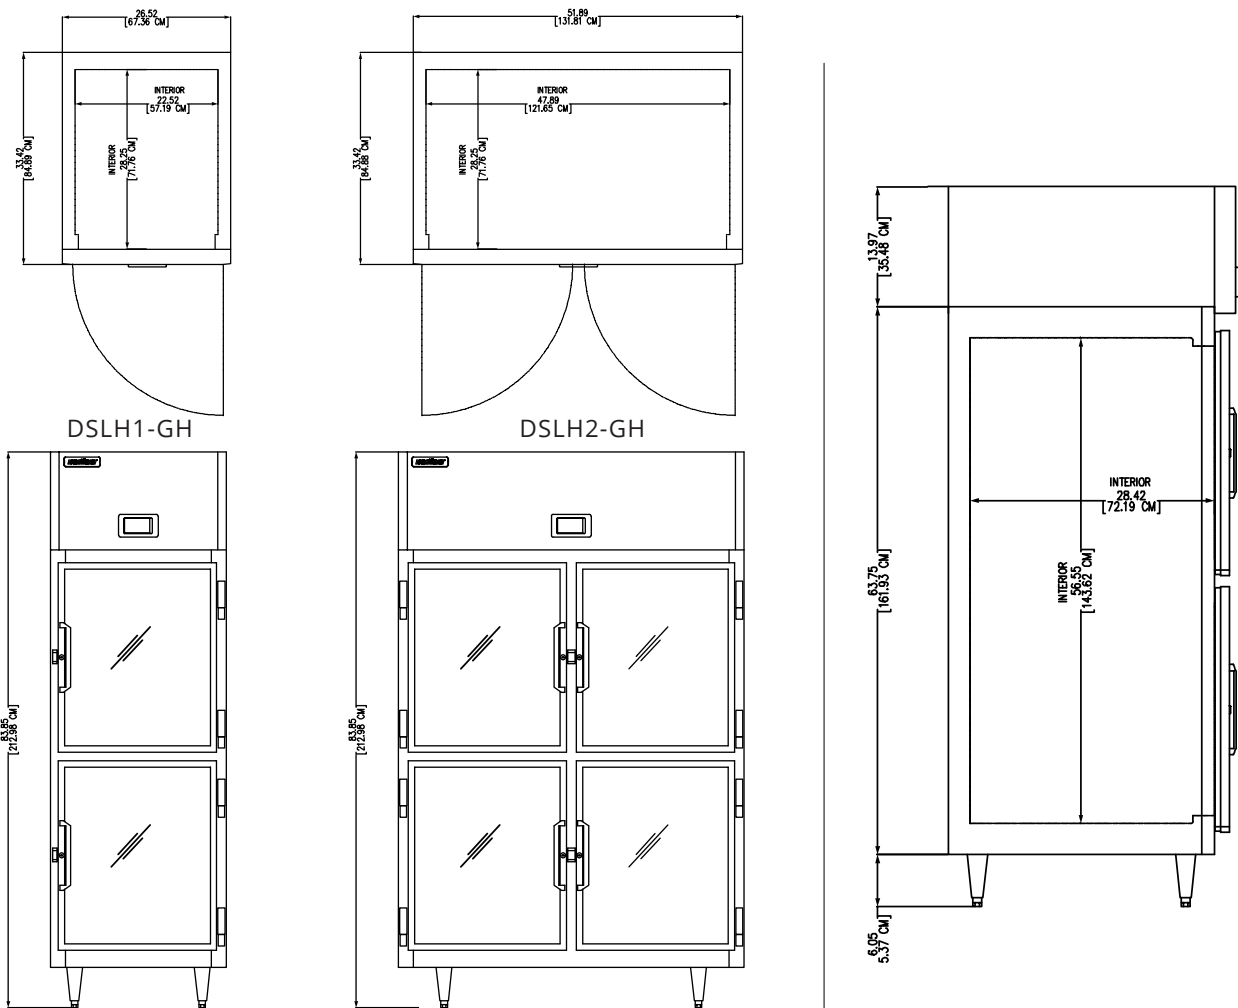

Welbilt reserves the right to make changes to the design or specifications without prior notice.

DSLH-G Heated Reach-Ins

Specifications								
Model	V/Hz/Ph	Amps	Volume Cu. Ft.	SHELF CAPACITY SQ. FT.	No. of Shelves	Heater Watts	Ship Weight	Nema Plug
DSLH1-G DSLH1-GH	208-240/60/1	6.8	21.5	N/A	N/A	1500	320	6-20P
DSLH2-G DSLH2-GH	208-240/60/1	13	46.5	N/A	N/A	3000	440	6-20P

Welbilt reserves the right to make changes to the design or specifications without prior notice.