

DSLHPT Pass-Thru

Heated Pass-Thru

DSLHPT Heated Pass-Thru

Models

- | | |
|-------------------------------------|-------------------------------------|
| <input type="checkbox"/> DSLHPT1-S | <input type="checkbox"/> DSLHPT2-S |
| <input type="checkbox"/> DSLHPT1-SH | <input type="checkbox"/> DSLHPT2-SH |



DSLHPT2-S

Standard Features

- Stainless steel exterior and interior
- easyTouch Control with remote monitoring capability
- Stay-open door feature for easy product loading and unloading
- Stainless steel door(s)
- Door activated interior LED light
- Heavy-duty cylinder lock
- Stainless steel interior door liner
- One piece, snap-in door gaskets
- Stainless steel breaker caps
- 3 silver freeze wire shelves
- 6" high adjustable stainless steel legs
- 8' cord and plug
- Adjustable Electronic Temp Control From 80°F To 180°F
- Built-In, Adjustable Humidity Control Vent
- Safety Shielded Strip Type Heating Elements
- Externally Mounted Blower Maintains Even Temperatures
- Three year parts and labor warranty and an additional 4 year compressor parts warranty.

Options & Accessories

- Stainless Steel Back And Shroud
- Tray Slides (type A & A/C)
- 3" Or 6" Casters
- Stainless Steel Kick Plate
- Door Swing Orientation (at time of order)
- Correctional Package
- Additional Shelves
- 6" Seismic Legs


Specifications

Heating system: Cabinets are designed to maintain temperatures between 80°F - 180°F. Units are heated with two bottom-mounted heating elements per section. The externally mounted blower allows for full use of interior cabinet while maintaining even temperatures. System is controlled using an electronic temperature control.




DSLHPT Heated Pass-Thru

DSLHPT1-S(H)

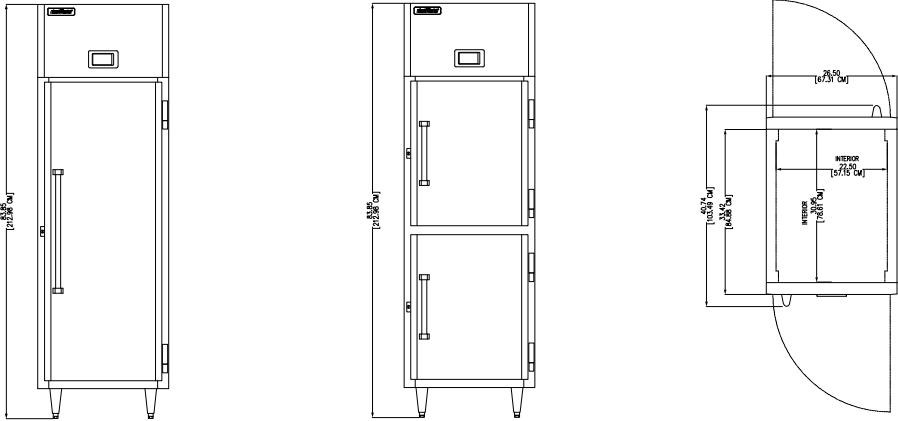

DSLHPT2-S(H)

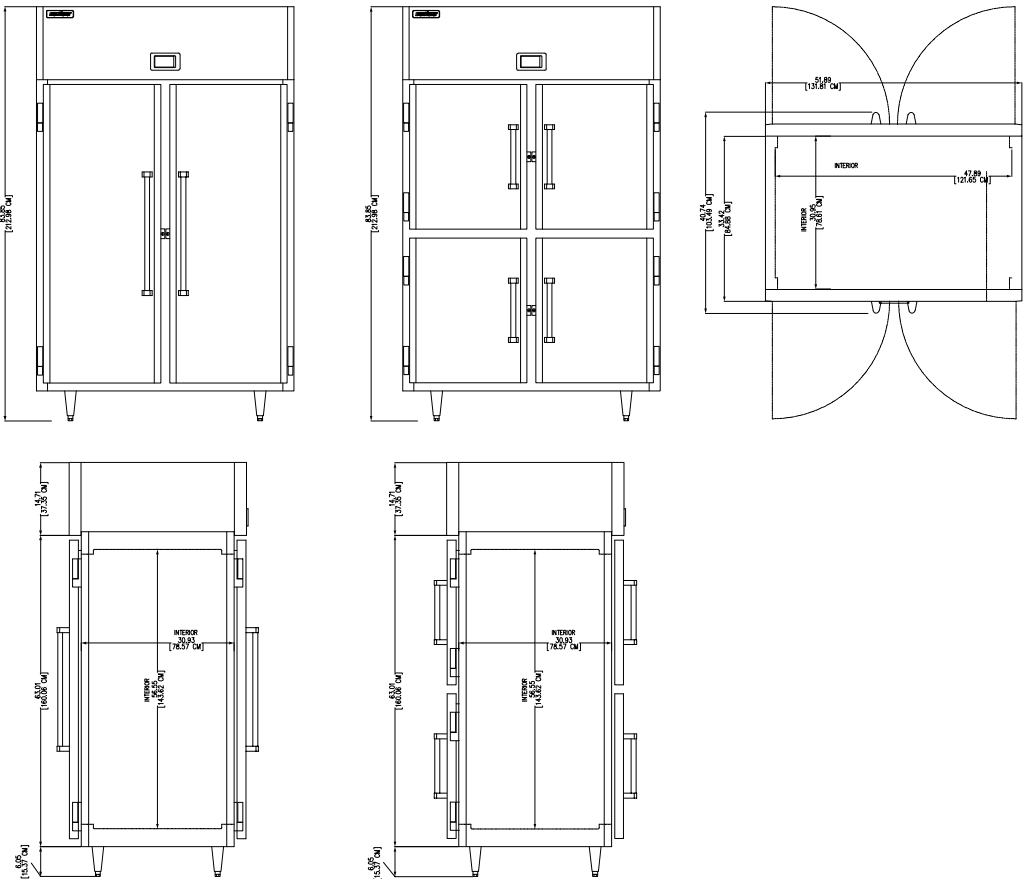

| Specifications | | | | | | | | |
|-------------------------|--------------|------|-------------------|------------------------------|-------------------|-----------------|----------------|--------------|
| Model | V/Hz/Ph | Amps | Volume Cu. Ft. | SHELF CAPACITY SQ. FT. | No. of Shelves | Heater Watts | Ship Weight | Nema Plug |
| DSLHPT1-S DSLHPT1-SH | 208-240/60/1 | 6.8 | 23.7 | N/A | N/A | 1500 | 527 | 6-20P |
| DSLHPT2-S DSLHPT2-SH | 208-240/60/1 | 13 | 48 | N/A | N/A | 3000 | 544 | 6-20P |

Welbilt reserves the right to make changes to the design or specifications without prior notice.